WAAS CH 70321 W26A	APP CRS 258°	Rwy ldg 11489 TDZE 1135 Apt Elev 1135

RNAV (GPS) Y RWY 26
PHOENIX SKY HARBOR INTL (PHX)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP- 0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 25L. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

MISSED APPROACH: Climb to 5000 direct OJGIL and via 259° track to BXK VORTAC and hold.

D-ATIS	PHOENIX APP CON	PHOENIX TOWER	GND CON	CLNC DEL	CPDLC
127.575	128.65 353.9	118.7 278.8 (Rwy 8-26) 120.9 254.3 (Rwy 7L-25R, 7R-25L)	119.75 269.2 (N) 132.55 269.2 (S)	118.1 269.2	

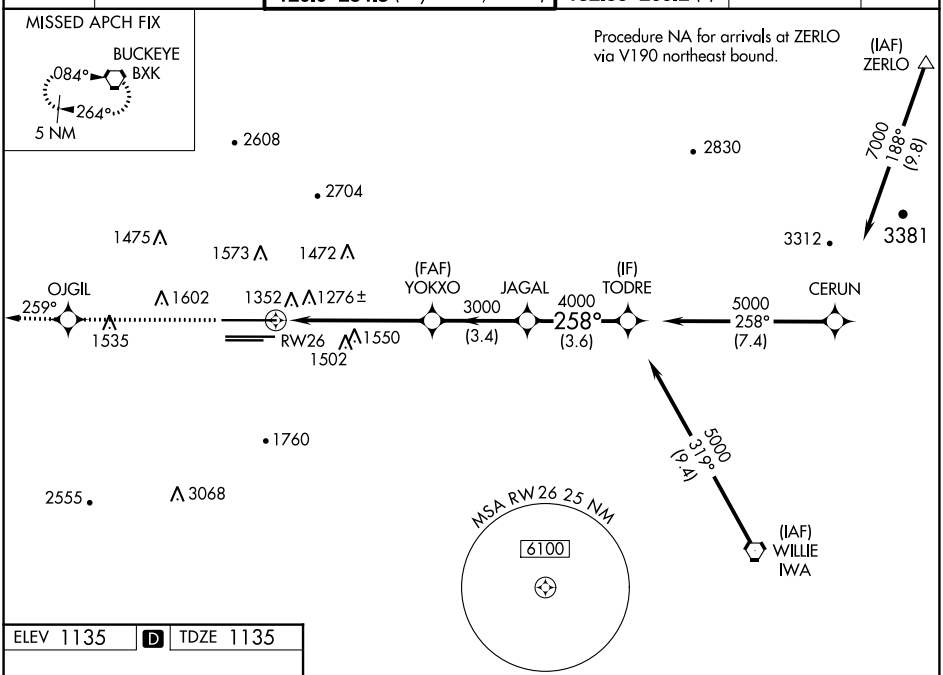

ELEV 1135 | D | TDZE 1135



HIRL Rwys 8-26, 7L-25R and 7R-25L
REIL Rwy 26

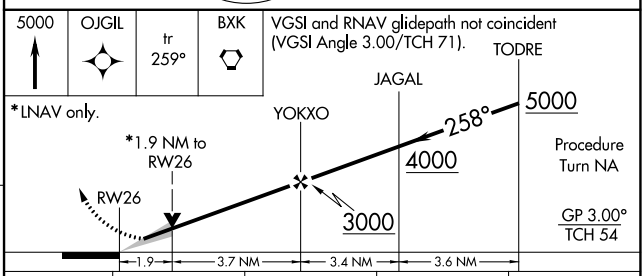

CATEGORY	A	B	C	D
LPV DA	1436-1 301 (400-1)			
LNAV/VNAV DA	1659-1¾ 524 (600-1¾)			
LNAV MDA	1800-1 665 (700-1)		1800-1¾ 665 (700-1¾)	1800-2 665 (700-2)
C CIRCLING	1800-1 665 (700-1)		2040-2¾ 905 (1000-2¾)	2560-3 1425 (1500-3)

SW-4, 27 JAN 2022 to 24 FEB 2022
SW-4, 27 JAN 2022 to 24 FEB 2022