

APP CRS	Rwy Idg	8995
227°	TDZE	26
	Apt Elev	27

RNAV (RNP) Y RWY 23
NORFOLK INTL (ORF)

T For uncompensated Baro-VNAV systems, procedure NA below -9°C (16°F) or above 54°C (130°F). GPS required. For inop ALS, increase RNP 0.10 DA visibility all Cats to 1½ SM, increase RNP 0.30 DA visibility all Cats to 1¾ SM.


MALSR



MISSED APPROACH: Climb to 2000 on track 227° to CALEY and hold.

ATIS 127.15	NORFOLK APP CON 118.9 353.7	NORFOLK TOWER 120.8 257.8	GND CON 121.9	CLNC DEL 118.5
----------------	--------------------------------	------------------------------	------------------	-------------------

RADAR REQUIRED

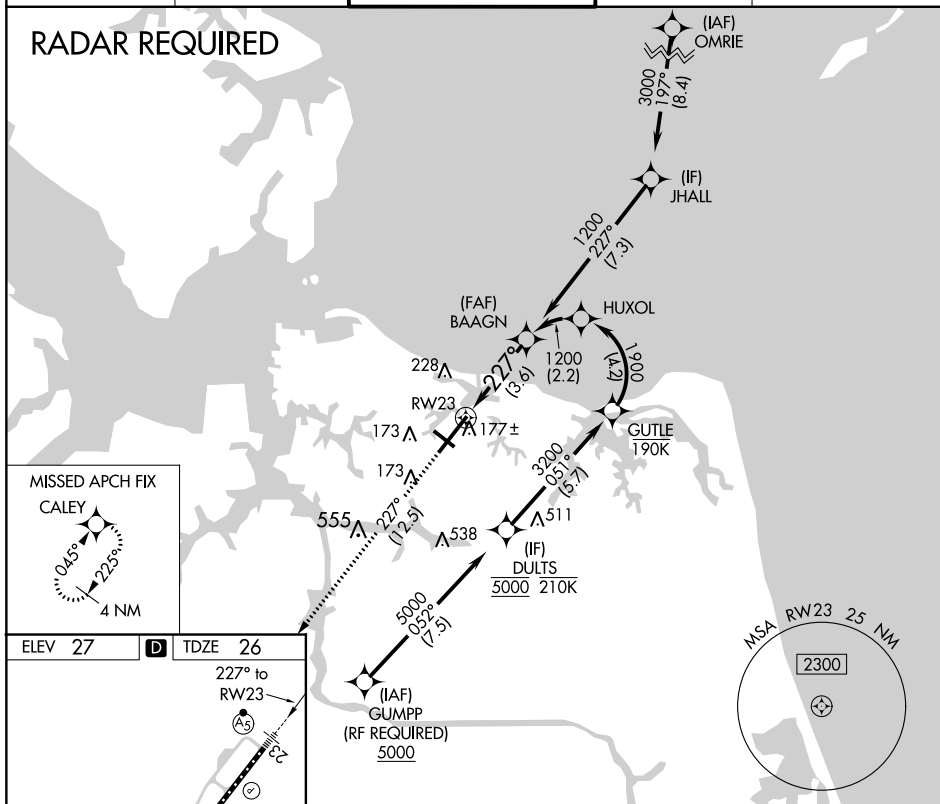

ELEV 27

D

TDZE 26

227° to RW23

A5

22

497.6' x 150'

900' x 150'

TWR 165

32

5


A5

☆

REIL Rwy 14 and 32

HIRL Rwy 5-23

MIRL Rwy 14-32

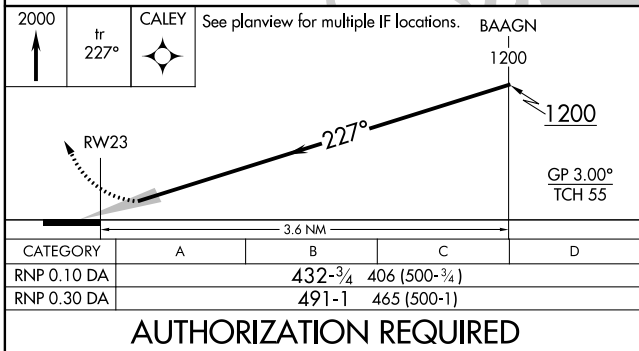

AUTHORIZATION REQUIRED