Downscaling European decarbonization scenarios of the heating sector to the Austrian community level: Assessing the heat density gap of centralized heat networks between 2050 and today

Sebastian Zwickl-Bernhard[a,b,*], Daniel Huppmann[b], Antonia Golab[a], Hans Auer[a]

[a]Energy Economics Group (EEG), Technische Universität Wien, Gusshausstrasse 25-29/E370-3, 1040 Wien, Austria
[b]Energy, Climate and Environment (ECE) Program, International Institute for Applied Systems Analysis (IIASA), Laxenburg, Austria

Abstract

Keywords:

[*]Corresponding author
Email address: `zwickl@eeg.tuwien.ac.at` (Sebastian Zwickl-Bernhard)

1. Introduction

The Paris Climate Agreement sets the global framework for mitigating climate change [1]. It stipulates that the increase in the global average temperature should be kept well below 2 °C compared to 1990. In addition, further measures are developed, aiming at a maximum increase of 1.5 °C. However, it is also about humanity adapting to the negative effects of climate change that are already being felt. The IPCC Special Report on 1.5 °C (SR1.5) summarizes the state of scientific knowledge globally on the consequences of 1.5 °C global warming [2]. Besides climate change mitigation measures, global emission pathways required for this are described.

To implement the Paris Climate Agreement and the SR1.5, the European Commission has set deep decarbonization targets together with national governments. In particular, the EU Green Deal describes the concrete goals in Europe, namely a climate-neutral and resource-conserving economy and society. The overarching goal is emissions neutrality in 2050. To achieve this long-term ambition, the European Commission recently presented "Fit for 55", a concrete roadmap to 2030. This program commits to a 55 percent reduction in emissions in 2030 compared to 1990. The concrete measures affect almost all sectors of the energy system and should lead to a significant efficiency improvement and a massive overall reduction in fossil fuels. It implies, among others, binding annual targets for reducing energy consumption and an extension of the already established EU emissions trading system (EU ETS) to new sectors. In addition to transportation, the building sector will also be part of the EU ETS in the future. A separate new emissions trading system for fuel supply in these sectors will be introduced. In the buildings sector, through the annual anchored emissions reduction, this means a set roadmap to complete decarbonization of heating and cooling demand, as the two reasons for emissions in this sector. In this paper, we look at what deep decarbonization of building heating demand may look like in 2050 and the implications of the sustainable energy mix for centralized heating networks.

The scope of the changes required by 2030/2050 in the heating sector become even clearer at the national level. The average share of renewable energies in the heating and cooling sector 2018 is only just above 20 % on average for all EU member states[1]. It is in fact higher in some countries, for example in Austria, where it is 34 %. However, fossil fuels continue to dominate there as well. To be even more specific for the heating sector: of the nearly 4,000,000 residential dwellings in Austria, more than 900,000 are heated with natural gas, and more than 500,000 with oil. If these heating systems are changed to renewable energy by 2050, this corresponds to a retrofitting of 50,000 appliances per year, or more than 130 per day - only in Austria. To achieve this goal, we need a massive expansion of centralized heating (and cooling) networks in addition to the retrofitting of on-site heating end-user devices. Centralized heating networks are particularly advantageous for supplying densely populated or urban areas resulting from high heat densities there [3]. In addition to heat density, the connection rate is a key factor influencing the efficiency of district heating/cooling networks and thus their implementation. For example, currently in Austria, at a connection rate of 90 %, $10\,\mathrm{GWh/km^2}$ is a rough guide for supplying an area with district heating[2]. The reference value of $10\,\mathrm{GWh/km^2}$ is in line with findings regarding district heating networks also from the Scandinavian region (Denmark, Sweden, and Finland) [4]. These are rough estimates, but they do allow an initial assessment of the economic viability or feasibility of a district heating network. If one goes into more detail when considering and evaluating district heating networks, numerous factors play a decisive role. Nussbaumer and Thalmann [5] thoroughly elaborate on the network design and its impact on the profitability of centralized heat networks. Laasasenaho et al. [6] emphasize in their study the optimal location of heat generation units/sources within centralized heat networks enabling a cost-optimized heat supply. Gopalakrishnan

3

and Kosanovic [7] focus in their study on the optimal heat generation technology dispatch. When examining the economic viability of district heating networks, building renovation measures must also be taken into account (see, e.g., in [8] and [9]). These reduce the heat demand and thus the heat density. However, studies show that a reduction in heat density is not necessarily a barrier to district heating networks [10]. Reidhav and Werner [11] show in their study how energy taxes can improve the profitability of sparse district heating networks in Sweden. Following these considerations and in light of ambitious CO2 reduction targets, it can also be assumed that the rising CO2 price can have a similar effect as the energy tax. Of course, this is only valid in the case of deep decarbonization of the generation mix feeding into centralized heat networks. And, also the increasing demand for cooling or the co-design of centralized networks for heating and cooling can increase the economic viability of these and counteract the reduction of heat density from an economic point of view [12].

However, the concrete implementation to achieve predefined climate change mitigation goals still is lacking in many cases. For this reason, numerous studies go beyond and show roadmaps for the rapid decarbonization of the system. For example, Rockström et al. [13] conduct such a study and propose pathways for halving gross anthropogenic CO_2 emissions every decade. Other works go into more depth regarding optimal solutions for the decarbonization of individual energy services. There are relevant differences between the individual sectors of the energy system related to decarbonization. How a sustainable energy service can be provided in the different sectors must therefore be examined in detail. This perspective is supported by a large number of detailed decarbonization studies covering specific energy service needs (e.g., for the building sector Leibowicz et al. [14], transport sector Pan et al. [15], and industries Habert et al. [16]).

Despite all the details associated with the sector-specific decarbonization strategies, the principles of a net-zero society base on three key points: (i) deployment and generation of renewable energy technologies (see, e.g., Bakhtavar et al. [17]

4

focusing on net-zero districts by deployment of renewable energy generation), (ii) reduction of the energy demand (see, e.g., Oshiro et al. [18] analyzing the impact of energy service demand reduction on the decarbonization and Grubler et al. [19] investigating a low energy demand decarbonization scenario), and (iii) increase in efficiency regarding the provision of energy services and the associated optimal utilization of sustainable energy sources. The third point (iii) includes, among others, two main aspects, namely, on the one hand, that potentials of renewable resources are exploited locally and on the other hand that energy carriers with various fields of application are utilized with the highest possible efficiency. We like to refer to just a few selected references without claiming to be exhaustive and focus here on hydrogen as one example of an energy carrier with high potentials in sustainable energy systems and a significant bandwidth of efficiency in terms of its generation and use. Van Ruijven et al. [20] highlight that the introduction of hydrogen in global energy systems only leads to lower emissions with high end-use efficiency and low-carbon production. Van Ressen [21] systematically investigates the possibilities and challenges of hydrogen and discusses extensively its role in the energy transition. Recently, Böhm et al. [22] comprehensively elaborate on hydrogen-related synergies and its role in sustainable heat supply. Thus, it is necessary to develop optimal strategies ensuring the utilization of renewable energy sources prioritized and in the most efficient way related to the provision of energy service needs.

In many cases when it comes to the question of optimal solutions, researcher uses numerical models. In general, these models strike a balance between complexity and aggregation. Integrated assessment models (IAMs) are large numerical models covering complex interrelations between climate, society, economics, policy, and technology. Dowlatabadi [23] provided 1995 a fundamental review on IAMs focusing on their role in the context of climate change. Krey et al. [24] discuss and systematically compare different IAMs. Harmsen et al. [25] elaborates on the modeling behaviour of IAMs. Wilkerson et al. [26] and van Vuuren et al. [27] deal with IAMs and their role in understanding global energy

decarbonization pathways. In particular, both studies examine CO_2 budget and price developments. Schwanitz [28] evaluates IAMs of global climate change and discusses, among others, the appropriate level of regional (spatial) aggregation of countries in the modeling analysis. Generalizing this aspect reveals an aspect already known but essential in the context of large numerical models. It becomes necessary for modelers to set priorities regarding the level of detail, which inevitably creates trade-offs in the analysis regarding the granularity of the temporal, spatial, and other dimensions. Gambhir et al. [29] also highlight this aspect of aggregation bias in their critical review of IAMs. They propose, among others, that IAMs should be increasingly be supplemented with other models and analytical approaches. Not least for this reason, (large) energy models also play a significant role in the analysis of energy systems in the context of climate change. Compared to IAMs, they more strongly emphasize the level of detail in terms of techno-economic characteristics (see the review of modeling tools of energy systems in [30]). However, the lack of granularity remains, that these (global) energy models consider only a highly aggregated spatial resolution. To name just two selected approaches, Capros et al. [31] (PRIMES) and Löffler et al. [32] (GENeSYS-MOD) provide energy system models focusing on the European energy system with a spatial resolution on the country level. Further approaches are needed to disaggregate results obtained at the country level to finer scales, such as districts, neighborhoods, and other local levels. In this context, Backe et al. [33] provided a novel approach in the context of merging local activities/behavior in sustainable local communities into a large energy system model (bottom-up linkage). In their study, they integrated local flexibility options into the global energy system model EMPIRE, which provides in principle only country-level resolution. This and other work confirms the emerging trend of making top-down and bottom-up linkages between different spatial-temporal levels of resolution to drive decarbonization across all sectors.

Against this background, the core objective of this work is the downscaling of decarbonization scenarios of the residential and commercial heating sector,

taking into account the infrastructure requirements of heat generation technologies/sources from the country to the local level. In particular, the prioritized preference of heat sources in centralized heat networks plays a key role, ensuring highly efficient usage of heat sources covering heat service needs. The assessment of centralized heat networks using heat density as a criterion is important in this analysis. An Austrian case study is proposed, downscaling values of the heating sector in 2050, obtained from the large numerical energy system model GENeSYS-MOD, from the country to 2095 local communities.

The method applied consists of three different scenario-independent downscaling techniques. As the first, proportional downscaling using population as proxy is used as reference (Section 2.1). As the second, an sequential downscaling approach is presented, dissaggregating from the country level to the sub-region level. Thereby, population density and the infrastructure requirements of heat technologies serve as additional criterion in the downscaling (Section 2.2). And as the third, an iterative downscaling algorithm is presented. This algorithm bases on graph-theory benchmarking and projects centralized heat supply on the local (community) level (Section 2.3). Section 3 presents and discusses the results of this work. Section 3.1 and 3.2 shows heat generation by source on different spatial levels. Section 3.3 and 3.4 presents centralized heat networks on a high spatial granularity. Section 3.5 synthesizes the results of centralized heat networks and compares heat densities of centralized heat networks in 2050 with today's values. Section 4 concludes this work and provides an outlook for future work.

2. Materials and methods

This section explains the methodology developed in this work. First, Section 2.1 explains proportional downscaling using population as a proxy. This downscaling technique is a well-established approach for the dissaggregation and often used in scientific and practical studies. Building upon, Section 2.2 presents the sequential downscaling and Section 2.3 the iterative downscaling algorithm in detail. Finally, Section 2.4 concludes this section and explains the open-source tools used in this work.

2.1. Proportional spatial downscaling using population as a proxy

Proportional downscaling is a well-established technique and is commonly used. The fields of application are not limited to the modeling of energy systems. Moreover, it is applied in different fields of scientific and practical studies. The reason for this is the intuitive application and that it offers possibilities for tailor-made adaptions, in particular, related to the downscaling driver and proxy, respectively [34]. In this context, van Vuuren et al. [34] provide a comprehensive analysis of different proxies for the downscaling of global environmental change, including, among others, gross domestic product (GDP) and emissions as a proxy. Sherba et al. [35] focus in their study on the downscaling of global land use projections and use the characteristic and distribution of land area as a proxy. Pretis and Roser [36] dissaggregate in their study growth rates from the global level using emission intensity as a proxy. However, in the context of downscaling aggregated values of energy systems, one often finds proportional downscaling using population as a proxy (see, e.g., Ahn et al. [37], van Vuuren et al. [38], and Alam et al. [39]). In this work, we also use this proxy and proportional downscaling and thus obtain a reference for comparing our novel developed methods. Equation 1 shows the basic expression of proportional downscaling, exemplarily, for the dissaggregation of the energy demand d from the country to the local level, using population p as a proxy.

$$d_{local} = \frac{p_{local}}{p_{country}} \cdot d_{country} \qquad (1)$$

For further information, we refer the reader here to the study in [38], providing a systematic classification of downscaling techniques going far beyond the basic proportional downscaling technique discussed so far. The reader can find population-based downscaling in their classification in the category algorithmic and proportional downscaling. In addition, they showed that novel downscaling methods have emerged in recent years as the scientific community has increasingly recognized the necessity for spatially and temporally disaggregation.

2.2. Sequential downscaling (from the country to the sub-region level)

The sequential downscaling algorithm (Algorithm 1) is developed to downscale aggregated values of the heating sector from the country to the sub-region level. Since at least the term sub-region can be understood differently, we use the definition of the European nomenclature of territorial units for statistics[3] (NUTS). The country-level corresponds to the NUTS0, and the sub-region level corresponds to NUTS3. Table 1 provides an overview of the NUTS nomenclature for Austria. Considering our Austrian case study, we downscale with the sequential downscaling algorithm from one NUTS0 region (country level) to 35 NUTS3 regions.

The purpose of the sequential downscaling algorithm is to provide a downscaling technique that considers the prioritized preferences of some heat generation technologies/sources as co-firing in cogeneration plants. Thus, these technologies are downscaled only to regions that provide the potentials for centralized heat networks. Therefore, population density serves as a criterion, indicating the possibility of centralized heat networks. Table 2 provides a qualitative overview of the different heat generation technologies/sources and their heat

---

[3]https://ec.europa.eu/eurostat/web/nuts/background.

NUTS classification	Description	Number	Example (population)
NUTS0	Country level	1	AT Austria (8.86 millions)
NUTS1	Major socio-economic regions	3	AT3 Western Austria (2.78 millions)
NUTS2	Basic regions for the application of regional policies (federal states)	9	AT31 Upper Austria (1.48 millions)
NUTS3	(Small) sub-regions for specific diagnoses (political/court districts)	35	AT312 Linz-Wels (529 thousands)
LAU (former NUTS4/5)	Subdivision of the NUTS 3 regions (communities)	2095	Enns AT312 Linz-Wels (11 thousands)

Table 1: Nomenclature of spatial areas using the Austrian NUTS nomenclature. The gray highlighted rows mark the aggregated or disaggregated spatial levels of the sequential or iterative downscaling algorithm.

network/infrastructure requirements. From this, the types of sub-regions used for downscaling the corresponding heat source are marked. Note that the different types are characterized by population density.

| Source | Requirements | Rural | Town/Mixed | Urban | Reference |
Heat technology	Heat network	Sparsely	Moderate	Dense	
Biomass	Middle		x	x	[40, 41, 42]
Direct electric	None	x	x	x	
Synthetic gas	Low	x	x	x	
Hydrogen	High			x	[43, 44, 45]
Heat pump (air)	None	x	x	x	
Heat pump (ground)	High			x	[46, 47, 48]
Heat storage	None	x	x	x	

Table 2: Qualitative overview for heat generation technologies/sources and their requirments for heat network infrastructure. The prioritized preferences (gray cell color) of heat sources in sub-regions is marked by the gray color.

For example, direct electric is characterized as a heat generation technology with no heat network requirements. Hence, it is downscaled to all types of sub-regions. In contrast, hydrogen is a heat generation source with high requirements and thus prioritized preferences (marked by the gray cell color) in densely populated areas using centralized heat networks. The right column refers to references that support these assumptions.

Building on this prioritization of heat sources considered in the downscaling, the sequential downscaling algorithm is presented on page 12. The inputs are: (i) heat generation by technology/source at the NUTS0 level, (ii) population as well as population density on the NUTS3 level, and (iii) empirical assumptions in terms of network infrastructure requirements per heat technology/source and potentials for heat network infrastructure (see Table 2).

Algorithm 1: Sequential downscaling algorithm (NUTS0 to NUTS3)
---

1 t: Heat generation technology/source ($t \in T$);

2 r: Sub-region (or NUTS3 region) ($r \in R$);

input : Heat generation per technology/source at NUTS0 level: (q_t);
Population density per region r (ρ_r);
Total population per region r (p_r);
Minimal network infrastructure requirements of t (σ_t);
Available potential of heat network infrastructure at r (π_r);

output: Heat generation per technology/source on NUTS3 level ($\hat{q}_{t,r}$);

Initialization:
Sort elements t in T descending by σ_t;
$q_r^{heat} \longleftarrow \sum_t q_t \cdot \frac{p_r}{\sum_r p_r}$;   // Calculate heat demand at each sub-region

3 $\tilde{q}_t \longleftarrow q_t$;   // Available heat generation for each technology/source

4 begin

238   **5**   **foreach** t **do**

     6 $List = [\ ]$;   // Collect valid sub-regions

     7 $demand = 0$;   // Reamining demand that needs to be covered

     8 $R^{'} = R \setminus \{\forall r \in R : \pi_r \leq \sigma_t\}$; // Get valid sub-regions by criteria

     9   **foreach** $r^{'} \in R^{'}$ **do**

     10   **if** $q_r^{heat} \geq 0$ **then**

     11 $List = List \cup r^{'}$;   // Add valid sub-regions to collection

     12 $demand \mathrel{+}= q_r^{heat}$;   // Total demand of valid sub-regions

     13   **end**

     14   **end**

     15   **foreach** $l \in List$ **do**

     16 $\hat{q}_{t,r} = \frac{q_r^{heat}}{demand} \cdot \tilde{q}_t$;   // Population-based downscaling

     17 $q_r^{heat} \mathrel{-}= \hat{q}_{t,r}$;   // Reduce heat demand at r

     18   **end**

   19   **end**

20 end

12

The algorithm itself consists of three main parts: initialization, pre-calculations, and downscaling. First, the initialization of the algorithm sorts the heat generation technologies/sources in descending order in terms of network infrastructure requirements. Then the calculation starts with the first technology/source (highest requirements) (line 5). For this technology/source, all possible sub-regions are collected (line 8). Those sub-regions already fully supplied (no remaining heat demand) are filtered out (line 10). After further pre-calculation steps, the available amount of heat generation is downscaled to all valid sub-regions (lines 11 and 15) using population as a proxy (line 16). This procedure is repeated sequentially for each heat technology/source. The output of the sequential downscaling algorithm are heat generation by source and the amount of heat demand covered by centralized heat networks on the NUTS3 level (in the Austrian case 35 different sub-regions).

2.3. Iterative downscaling (from the sub-region to the small sub-region level)

This section explains the methodology of the iterative downscaling algorithm. We propose this downscaling technique translating heat generation by technology/source from the sub-region (NUTS3) to the community level (LAU) (see Table 1). This in-depth spatial resolution is imperative for realistic network infrastructure planning [49]. The underlying concept of iterative downscaling bases on graph theory and assessing network topology using benchmark indicators.

<div style="text-align:center">

Algorithm 2: Iterative downscaling algorithm

</div>

1 s: Stage of iteration ($s \in \{0, 1, *\}$);

2 G^s: Centralized heat network graph at stage s;

3 N^s: List of nodes at stage s: ($n^s \in N^s$);

4 L^s: List of lines connecting nodes k and j at stage s: ($l^s_{k,j} \in L^s$);

5 Q^s: Centralized heat generation at stage s: ($q^s_{n^s} \in Q^s$);

6 $\tilde{Q}^s$: On-site heat generation at stage s: ($\tilde{q}^s_{n^s} \in \tilde{Q}^s$);

7 Π^s: Benchmark indicator value at stage s ($\pi^s_{n^s} \in \Pi^s$);

input : $G^0 = \{N^0, L^0, Q^0, \tilde{Q^0}\}$;

output: $G^* = \{N^*, L^*, Q^*, \tilde{Q^*}\}$;

Initialization:

$s = 0$, $iter = True$;

8 begin

9   **while** $iter = True$ **do**

10   **foreach** $n \in N^s$ **do**

11 $\Pi^s_{n^s} = f(N^s, L^s, Q^s)$;   // Calculate benchmark indicator value

12   **end**

13 i with $\pi^s_i = min(\Pi^s)$;   // Get node with lowest indicator value

14 $N^{s+1} = N^s \setminus i$;   // Remove node from graph obtaining next stage

15 $\tilde{q} = \sum_{N^{s+1}} \tilde{q}^s_{n^s}$;   // Calculate available on-site heat generation

16   **if** $\tilde{q} \geq q^s_i$ **then**

17   **pass**

18   **else**

19 $\tilde{q} = q^s_i$; // Set upper bound of centralized heat generation that is used for reallocation among nodes if necessary

20   **end**

21   **foreach** n^{s+1} **do**

22 $q^{s+1}_{n^{s+1}} = q^s_{n^s} + \frac{q^s_i}{\tilde{q}} \cdot \tilde{q}^s_{n^s}$; // Increase centralized heat generation

23 $\tilde{q}^{s+1}_{n^{s+1}} = \tilde{q}^s_{n^s} - \frac{q^s_i}{\tilde{q}} \cdot \tilde{q}^s_{n^s}$;   // Decrease on-site heat generation

24   **end**

25 $L^{s+1} = L^s \setminus \{\forall l^s_{k,j} : k = i \vee j = i\}$;   // Remove connecting lines

26 $G^{s+1} = \{N^{s+1}, L^{s+1}, Q^{s+1}, \tilde{Q^{s+1}}\}$;   // Create new network graph

27 $\Pi^{s+1}_{n^{s+1}} = f(N^{s+1}, L^{s+1}, Q^{s+1})$;   // Calculate new indicator values

28   **if** $mean(\Pi^{s+1}) \geq mean(\Pi^s)$ **then**

29 $G^s = G^{s+1}$;   // Set updated heat network graph as new input

30   **else**

31 $iterate = False$;   // Stop iteration if no improvement

32   **end**

33   **end**

34 $G^* = G^s$;   // Set heat network graph as result

35 end

<div style="text-align:center">

14

</div>

2.3.1. Algorithm description

The iterative downscaling algorithm is presented on page 14. The idea is to assess, benchmark, and improve the topology of centralized heat networks. This is achieved in our proposed approach by iterative downscaling. Essentially, the main steps of the algorithm can be summarized as follows:

1. Downscale the results of the sequential downscaling algorithm from NUT3 to the LAU level using population as downscaling driver obtaining the initial heat network graph G^0 (input)

2. Benchmark each node of the heat network graph (line 11), identify node with the lowest indicator value and remove the node from the graph generating a reduced heat network graph (lines 13 and 14)

3. Reallocate centralized and on-site heat generation for all nodes (lines 22 and 23)

4. Recalculate benchmark indicator value for all remaining nodes within the network graph (line 27)

5. Compare the average value of the indicator value of the initial and reduced heat network graph (lines 28 and 29)

6. Update heat network graph in case of an higher average indicator value and jump to step 2. Otherwise, the termination of the algorithm is achieved.

Recent studies support this approach focused on the topography of energy systems and networks (see for example in [50]). Bordin et al. [51] conduct an approach for the optimized strategic network design of centralized heat systems. In any case, the topography of supply areas plays an important role not only in centralized heat supply. Therefore, another look at approaches in general in the context of energy systems is worthwhile here. We refer here to Shekoofa and Karbasian [52] focusing in their study on design criteria for electrical power systems' topology selection. Many further contributions can be found in the literature. However, the underlying concept of these studies can be applied to the heating system and in particular to the topography of centralized heat networks. Allen et al. [53] evaluate the topology of centralized heating systems

and conclude that the optimization of the topology is promising to facilitate the adoption of centralized heat networks.

2.3.2. Heat network topology benchmarking using a graph theory based indicator

So far, we have only introduced the function $f(N^s, L^s, Q^s)$ (see line 11 in the iterative algorithm on page 14) as calculation procedure of the benchmarking indicator value. Below, we describe and discuss the approach of using a weighted cluster coefficient as function and benchmarking indicator.

The proposed benchmarking indicator value is derived from graph-theory. Detailed information in the context of network analysis using indicators can be found in the fundamental work by Strogatz in [54]. Morever, we refer the reader to the study in [55] where Sanfeliu and Fu elaborate in detail on network topologies and their transformation. In this work, we use a weighted cluster coefficient as benchmark indicator and determining the transformation path of the centralized heat network graph. Equation 2) shows the calculation of the weighted cluster coefficient

$$c_{n^s} = \frac{q_{n^s}}{max\ q^s} \cdot \frac{\alpha_{n^s}}{\beta_{n^s}} \tag{2}$$

where q is the amount of centralized heat supply, α the number of triangles that can be formed with direct neighboring nodes, and β the number of lines connecting to the graph for node n at stage s. In the context of the fundamental concept of *alpha*, we refer again to the literature. In particular, the study in [56] comprehensivley deals with cluster coefficients and provides related generalized concepts. In addition, relevant aspects of the cluster(ing) coefficient is shown in [57]. In the works cited and also in the one presented here, the aim is to achieve a high value of the cluster coefficient for each node considered (i.e., $\frac{\alpha}{\beta} \approx 1$). However, we extend the basic concept of the cluster coefficient from literature and propose a weighting with the relative centrally supplied heat quantity. From an energy economics point of view, at least two important

16

aspects are so considered in the benchmarking process. (i) a high connection rate to the centralized heat network and (ii) a connection of those areas to the network which has a high heat demand and heat density, respectively. Both aspects are investigated in the literature. For example, Nilsson et al. [58] focus in their study on the importance of the connection rate of centralized heat networks. Besides, Dochev et al. [59] investigate in their study the impact of linearly decreasing heat densities and the influence on the profitability of the centralized heat networks.

2.4. Development of an open-source package building upon pyam

The described method will be released as an open-source python package in the course of publishing this work at the author's GitHub account. In this package, we build upon the existing open-source python package *pyam* [60]. *Pyam* is an open-source package for the analysis and visualization of integrated assessment and macro-energy scenarios [61]. In this work here, it is used in particular used for (i) the linkage between the sequential and the iterative downscaling algorithm, (ii) for the internal calculation steps within both downscaling algorithms, and (iii) for the visualization of the results. Besides, we used the open-source python package *networkx* [62], when implementing the iterative downscaling algorithm. We refer to the repository for the codebase, data collection, and further information.

17

3. Results and discussion

This section presents the results of the Austrian case study. Four different storylines are investigated, covering a wide range of possible future developments of the Austrian energy system in the context of European deep decarbonization. Section 3.1 shows the heat generation mix supplying the heat demand (residential and commercial) on the country level. In Section 3.2, the obtained heat generation mix is described on finer geographical scale, sub-regional and community level. Potentials of centralized heat network are presented further in Section 3.3. Section 3.4 shows the centralized heat networks on the community level. Finally, Section 3.5 compares the projected centralized heat networks in 2050 with today's networks based on heat density.

*3.1. Heat supply of the Austrian residential and commercial sector in 2050:
four different decarbonization scenarios obtained from the H2020 project
openENTRANCE*

This section presents the heat generation mix covering the Austrian residential and commercial heat demand in 2050 for four different storylines, which were (*or "are currently"*) developed within the H2020 openENTRANCE project. They are named as follows: *Directed Transition*, *Societal Commitment*, *Techno-Friendly*, and *Gradual Development*. Within each of them, specific fundamental development of the energy systems is described while aiming for a sustainable transition of the provision of energy services. The first three storylines consider the achievement of the 1.5 °C global warming climate target. The latter storyline (*Gradual Development*) can be interpreted as a more conservative storyline aiming for the less ambitious 2.0 °C climate target. Below, the storylines are briefly described before the quantitative results on the country level are presented. For a more detailed description of the storylines, it is referred to [63] and [64]. Further informations also are available on the website of the project [4]

---

[4]https://openentrance.eu/

and GitHub[5].

The underlying concept of the four storylines is a three-dimensional space spanned by the following parameters: technology, policy, and society. Each storyline describes a specific pathway to reach a decarbonized energy system taking into account a pronounced contribution of two dimensions. Regarding the third dimension, a development is assumed that leads to no significant contribution to the decarbonization of the energy system.

- *Directed Transition* looks at a sustainable provision of energy services through strong policy incentives. This bundle of actions becomes necessary because neither the markets nor society adequately pushes sustainable energy technologies.

- *Societal Commitment* achieves deep decarbonization of the energy system by a strong societal acceptance of the sustainable energy transition. Thereby, decentralized renewable energy technologies together with policy incentives lead to a sustainable supply of energy service needs. Parallel, no fundamental breakthroughs of new clean technologies are within sight.

- *Techno-Friendly* describes a development of the energy system where a significant market-driven breakthrough of renewable energy technologies gives rise to the decarbonization of energy service supply. Alongside, society acceptance supports the penetration of clean energy technologies and the sustainable transition.

- *Gradual Development* differs from the other storylines as on the one hand, this storyline only aims for the less ambitious 2.0 °C climate target, and on the other hand, a little of each possible sustainable development of the energy system is described here. While all three dimensions contribute to decarbonization, they do not push it sufficiently and result in a more conservative storyline than the others.

---

[5]https://github.com/openENTRANCE

Table 3 shows the heat generation by technology/source in Austria 2050 for the four different storylines. These values were obtained in course of the H2020 project openENTRANCE and are the modeling results calculated using the open-source model GENeSYS-MODv2.0 [65]. According to the underlying assumptions in the storylines, the heat generation of the different sources/technologies vary in some cases significantly (e.g., hydrogen-based heat generation in *Directed Transition* and *Gradual Development* (7.62 TWh) or Heat pump (ground) generation in *Techno-Friendly* and *Societal Commitment* (14.78 TWh)). The gray-colored column Σ presents the sum of heat generation using centralized heat networks, which varies between 19.49 (*Techno-Friendly*) and 35.23 TWh (*Gradual Development*).

	Heat generation by source in TWh	Biomass	Direct Electric	Synthetic gas	Heat pump (air)	Heat pump (ground)	Heat storage	Hydrogen	Σ
Storyline	Directed Transition	5.37	2.13	0.36	22.73	19.50	14.84	1.03	25.90
	Societal Commitment	5.37	1.98	1.35	15.71	21.47	10.58	2.18	29.02
	Techno-Friendly	5.37	1.53	2.79	25.95	6.69	16.36	7.43	19.49
	Gradual Development	5.37	1.81	5.35	9.68	21.21	15.57	8.65	35.23

Table 3: Heat generation by source in TWh supplying the residential and commercial heat demand in Austria 2050 for the different scenarios. Values obtained from the H2020 project openENTRANCE and GENeSYS-MOD.

3.2. Heat technology generation in 2050 on different spatial granularities

Figure 1 shows the heat generation per technology/source on different spatial granularities: the country (NUTS0), sub-region (NUTS3) and community (LAU) level (from left to right). The level of spatial details increases from the left to the right. In the middle, the residential and commercial heat supply in a representative rural and urban sub-region, respectively, is presented. The rural sub-region *Mostviertel-Eisenwurzen* (NUTS3 code AT121) shows high shares of heat pumps (air sourced) and small-scale heat storage systems. In addi-

20

tion, synthetic gas and direct electric heating systems supply the heat demand. The urban sub-region *South Viennese environs* (AT127) is mainly supplied by ground-sourced heat pumps, biomass, and hydrogen. Air-sourced heat pumps and again heat storage cover the remaining demand. Throughout the pie charts within the figure, shares of heat generation using centralized heat networks are indicated using blue-colored edges. On the very right, an example of the resulting centralized heat network on the community level for the four different scenarios is presented. Within the four subfigures presenting centralized heat networks (each for one storyline), the size of the points represents the amount of heat demand using centralized supply in a community. The comparably high heat demand in the *Gradual Development* scenario results in an extensive centralized heat network infrastructure (see lower right subfigure in Figure 1). The other three centralized heat networks are characterized by fewer (less supplied small sub-regions) and smaller points (less supplied heat demand by the centralized heat network). Figure 2 compares the heat generation by source between 2020 (today) and 2050 for the four different scenarios. The height of the bars shows the absolute differences by source between both years, whereby a negative difference indicates less heat generation by this source in 2050. The height of the bars indicates the values of the *Societal Commitment* scenario since this is the scenario with the lowest total heat demand ($-18.15\,\text{TWh}$). In addition, the scenario with the lowest and highest difference respectively is marked for each heat source and the total demand. For instance, the highest decrease is seen in natural gas in the *Directed Transition* scenario ($-53.76\,\text{TWh}$).

3.3. Sub-regions in Austria 2050 with high potentials for centralized heat supply

The potentials of centralized heat supply in Austria 2050 are limited to densely populated areas (urban areas). In particular, the results indicate only six different sub-regions (NUTS3 regions) that are supplied by centralized heat networks (see Figure 3). Although the exact numerical numbers differ, the six sub-regions in each scenario are (partially) supplied by centralized heat networks. Table 4 shows the centralized and on-site heat supply in the six sub-regions. Thereby,
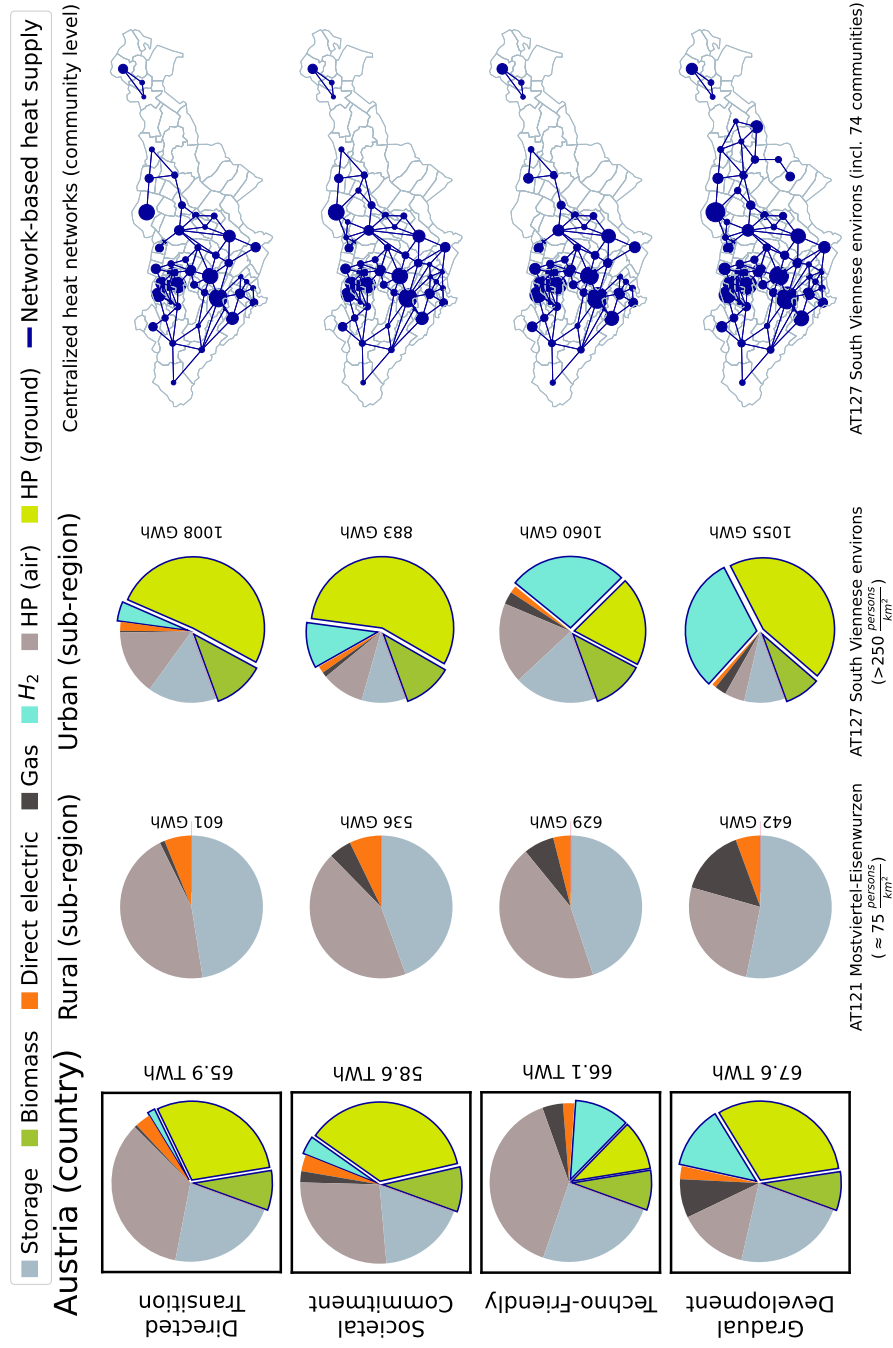
21

Figure 1: Heat technology generation on different spatial granularity levels in the different scenarios supplying the residential and commercial heat demand. left: on the country level. middle: comparison of a rural and urban sub-region. right: centralized heat network topology (size of the points represent the amount of heat demand supplied by the network)
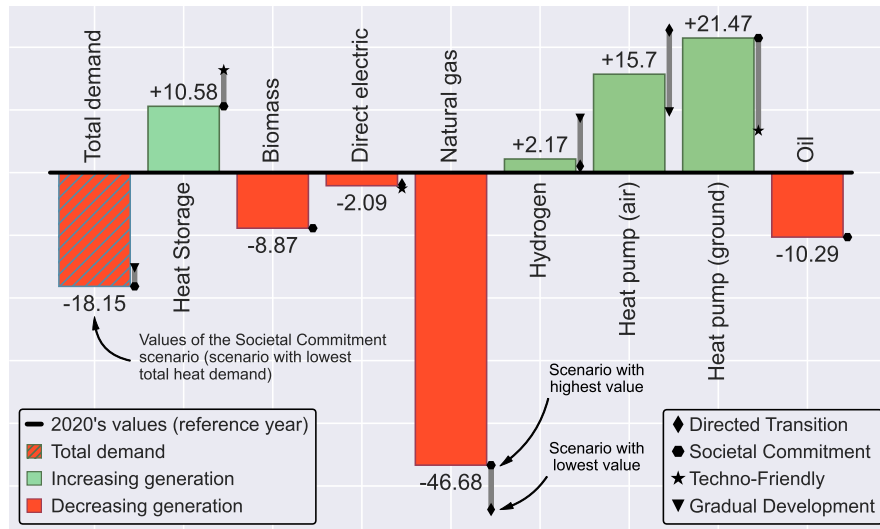
Figure 2: Comparison of heat generation by source between the reference year 2020 (black line) and 2050 in Austria. The height of the bars shows the absolute increase/decrease 2050 in the *Societal Commitment* scenario. The scenario with the lowest and highest difference, respectively, is indicated by the markers.

the connection rate is assessed by the share of centralized heat supply in the total heat demand. The population density varies in the six sub-regions between $229 \, \mathrm{persons/km^2}$ (AT323 - Salzburg and sourroundings) and $5124 \, \mathrm{persons/km^2}$ (AT130 - Vienna).

3.4. Centralized heat network topology on the community level

This section presents the centralized heat network topology of the sub-region *South Viennese environs* (AT127) and all included communities. In Figure 3, this particular sub-region is marked by the orange box and figure 4 shows the projected centralized heat network topology. In particular, the network topology is presented for the initial condition (as result of the sequential downscaling, $i = 1$) and in the final condition ($i = 29$) of the network. The distribution of the benchmark indicator values of the centralized heat network depending on the number of iterations is presented in the middle. Thereby, the mean value is marked in orange and increases with the number of iterations (increase from one third to almost two). Within the algorithm, this is achieved by reducing the supply area (decline in connected communities from 75 to 47). At the same time, the number of connected population decreases by 13.3%, starting from a population of $386 \, \mathrm{k}$ being connected to centralized heating network in the before the first iteration. After the final iteration ($i = 29$), the termination criterion is reached. A possible following step of iteration could not increase the benchmark indicator mean value any further. The iterative reduction of supplied small sub-regions does not necessarily result one contiguous graph. For example, three communities form a subgraph that is separate from the other network (see upper right in the final condition network graph). The results discussed above suggest that reducing the number of small sub-regions supplied by the centralized heat network increases the indicator value and thus the efficiency of the heat network topology. Simultaneously, this also increases the heat density of the supply area. In the following subsection, the obtained heat density values of the heat networks are compared with existing values and today's minimum required values for centralized heat networks.

24

| | | in TWh | | in % |
Sub-region	Storyline	Centralized	On-site	Connection rate
South Viennesse environs (AT127)	Directed Transition	0.72	0.17	81
	Societal Commitment	0.78	0.11	88
	Techno-Friendly	0.90	0.24	79
	Gradual Development	1.20	0.09	93
Vienna (AT130)	Directed Transition	3.98	0.95	81
	Societal Commitment	4.28	0.61	88
	Techno-Friendly	4.98	1.33	79
	Gradual Development	6.59	0.47	93
Graz (AT221)	Directed Transition	0.92	0.22	81
	Societal Commitment	1.53	0.14	92
	Techno-Friendly	1.16	0.31	79
	Gradual Development	1.53	0.11	93
Linz-Wels (AT312)	Directed Transition	1.24	0.30	81
	Societal Commitment	1.34	0.19	88
	Techno-Friendly	1.56	0.42	79
	Gradual Development	2.06	0.15	93
Salzburg and surroundings (AT323)	Directed Transition	0.75	0.18	81
	Societal Commitment	1.24	0.11	92
	Techno-Friendly	0.93	0.25	79
	Gradual Development	1.24	0.09	93
Rheintal-Bodensee (AT342)	Directed Transition	0.66	0.16	81
	Societal Commitment	0.71	0.10	88
	Techno-Friendly	0.82	0.22	79
	Gradual Development	1.09	0.08	93
		Average connection rate		85.25 %

Table 4: Centralized heat supply and on-site heat generation in the six Austrian sub-regions, with potentials of centralized heat networks in 2050

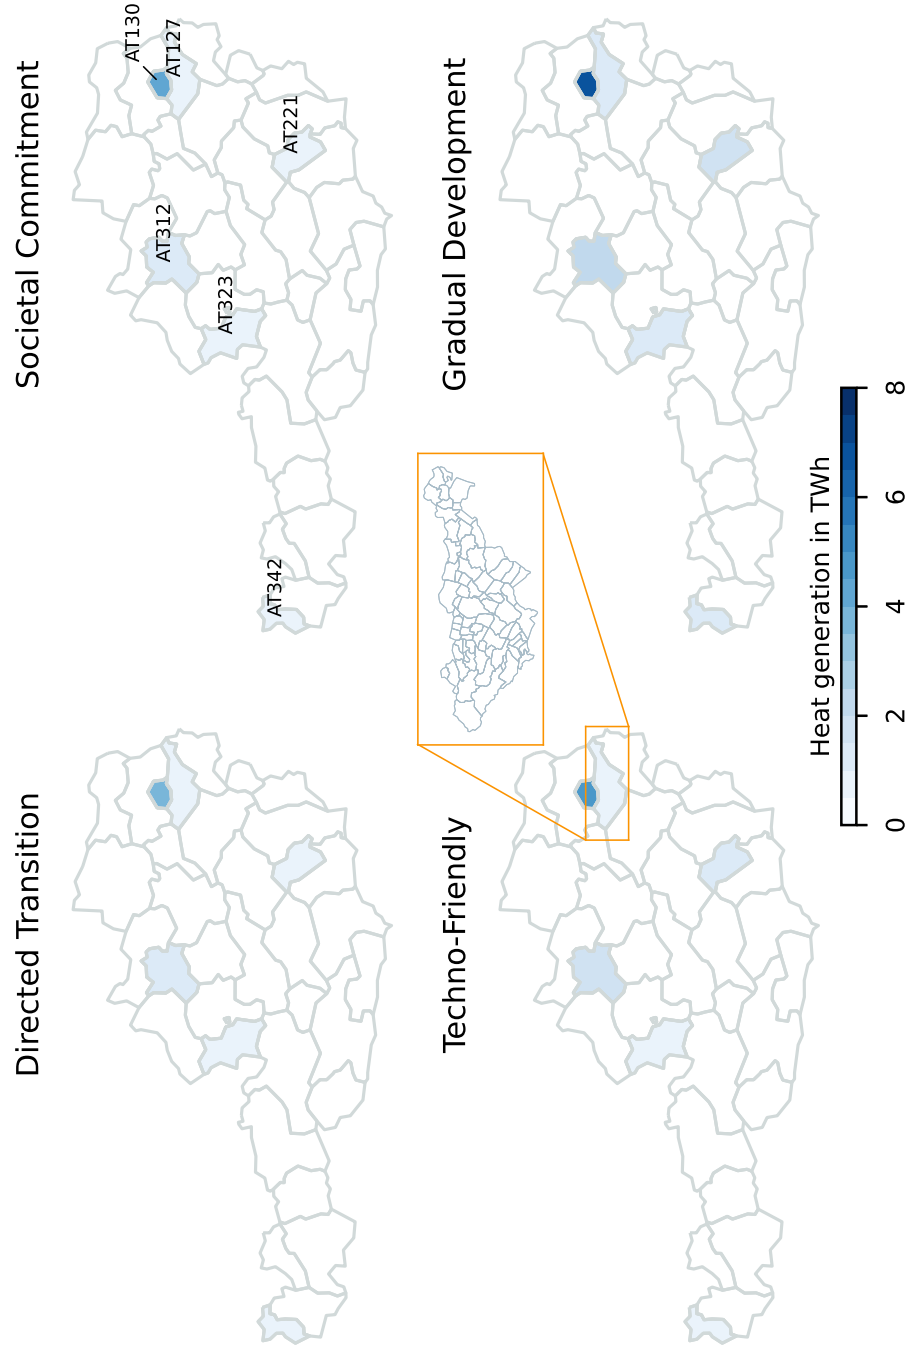# Centralized heat supply in Austrian NUTS 3 regions 2050 in TWh

Societal Commitment

AT130
AT127
AT221
AT312
AT323
AT342

Directed Transition

Gradual Development

Techno-Friendly

Heat generation in TWh

0   2   4   6   8

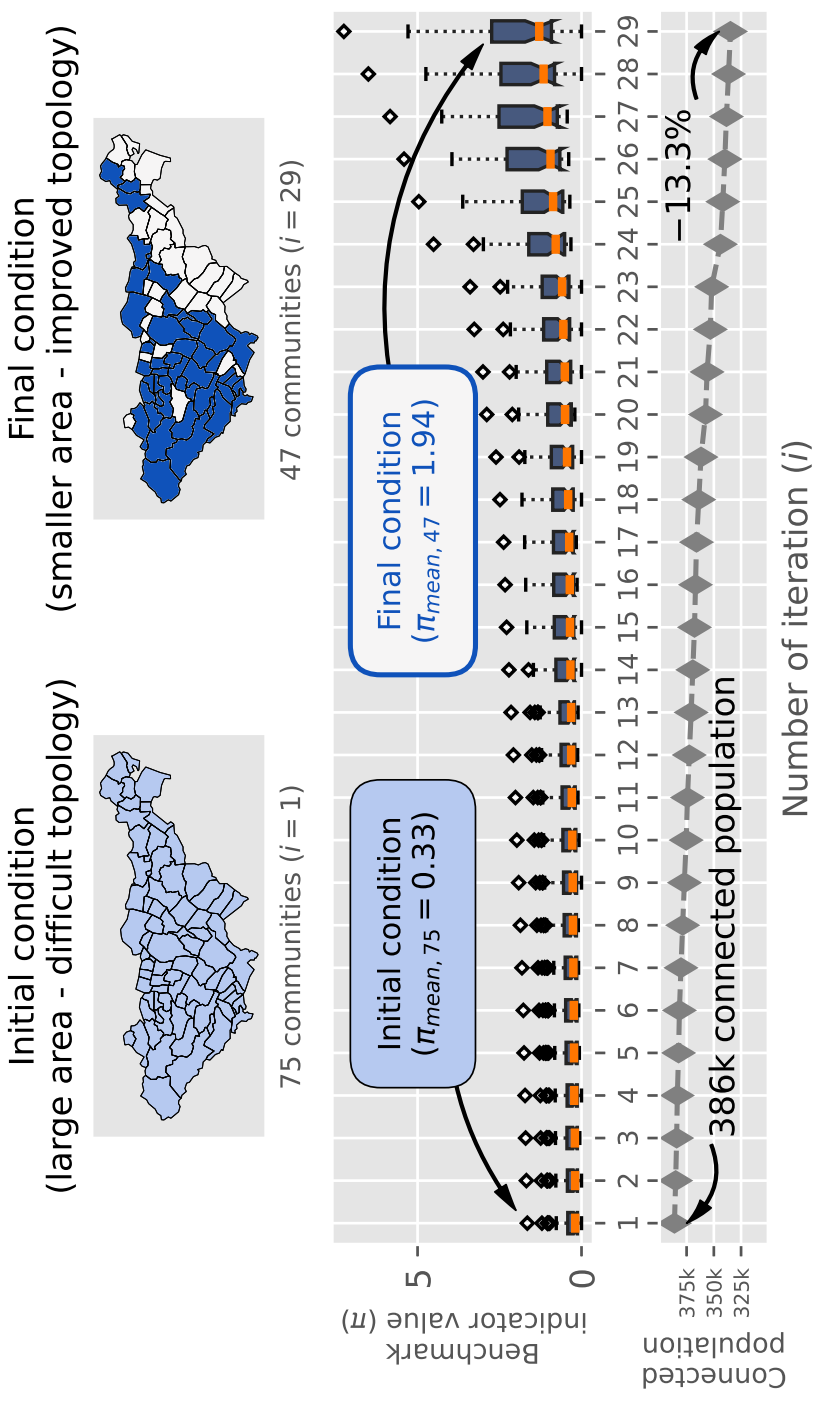Figure 3: Centralized heat supply in Austria 2050

Figure 4: Centralized heat network topology in the initial and final condition. The boxplot (middle) indicates the improved network topology by an increasing benchmark indicator mean value (orange line). In the final condition, the connected population declines by -13.3% compared to the initial condition.

3.5. Comparison of 2050's and today's centralized heat networks using heat density as criterion

In the following, the centralized heat network in *Graz* (AT221) is investigated in detail. Figure 5 shows the heat density of the centralized heat network in the *Techno-Friendly* scenario.
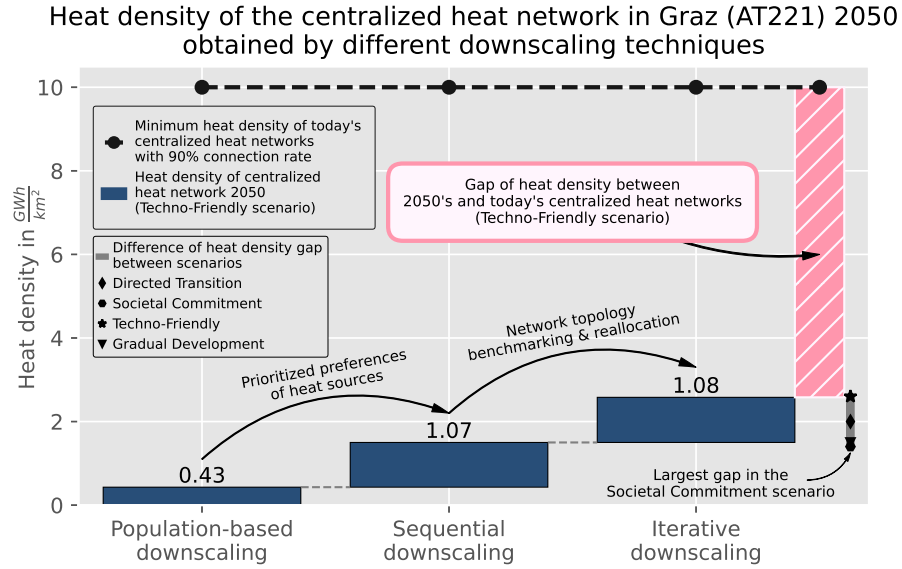

Figure 5: Heat density of the centralized heat network in *Graz* (AT221) 2050 in the *Techno-Friendly* scenario. The gap of heat density between 2050's and today's heat density (black dashed line) is marked by the pink bar. The differences of the heat density gap between the scenarios is marked by the gray bar.

The x-axis shows the three different downscaling techniques. The numerical numbers indicate an significant increase of the heat density resulting by the prioritized preference of heat sources ($+1.07\,\mathrm{GWh/km^2}$) and the network topology benchmarking ($+1.08\,\mathrm{GWh/km^2}$). However, comparing the obtained heat density value with heat density values of today's centralized heat networks reveals a signifcant gap (see the pink bar). According to references from the practice (see, e.g., in `http://www.austrian-heatmap.gv.at/ergebnisse/`), the heat density of today's networks is assumed to be $10\,\frac{\mathrm{GWh}}{\mathrm{km^2}}$ with a connection rate of $90\,\%$. In general, the gap of heat density varies between the different sce-

28

narios. The smallest is achieved in the *Techno-Friendly* scenario and amounts to 7.42 $\frac{\text{GWh}}{\text{km}^2}$ as presented in Figure 5 by the pink bar. The largest gap is seen in the *Societal Commitment* scenario and is 8.41 $\frac{\text{GWh}}{\text{km}^2}$. The presented results of the sub-region are representative for the other sub-regions with potentials of centralized heat networks (excluding *Vienna* (AT130)). Figure 6 presents for the six different sub-regions the heat density values 2050. In particular, the results indicate no heat density gap for *Vienna* (AT130) in all the scenarios, except a minor one in the results obtained using *Directed Transition* scenario (i.e., heat density lower than 10 $\frac{\text{GWh}}{\text{km}^2}$).
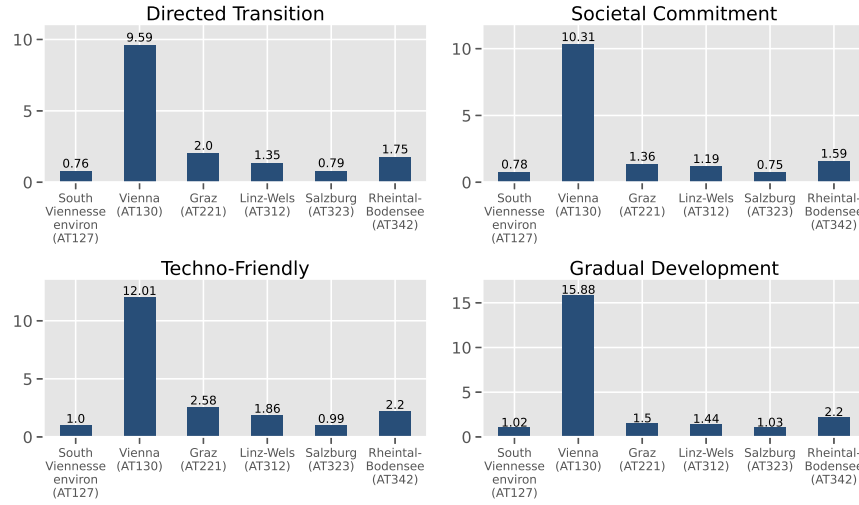

Figure 6: Heat densities (blue bars) of centralized heat networks in the six Austrian sub-regions and in the four different decarbonization scenarios.

4. Conclusions and outlook

The sustainable energy transition requires methods to bridge the gap between global plans and implications and processes on the local level. Techniques for downscaling of global decarbonization scenarios to finer scales will become increasingly important in the future. Thereby, energy-policy makers have to rely on the meaningfulness of the downscaled values, which requires tailor-made downscaling techniques for the different fields of energy systems. This work emphasizes a downscaling technique for the residential and commercial heating sector, taking into account the technology-specific requirements of heat network infrastructure accounting for the highly efficient use of energy carriers. In particular, the proposed downscaling techniques reveal the potentials of centralized heat supply in four different European decarbonization scenarios on a high spatial granularity.

Results indicate that centralized heat systems undergo a fundamental shift going beyond the decarbonization of the supplying energy mix. In particular, the reduction of heat density of centralized heat networks compared to today's networks poses massive challenges to heat supply companies and fundamentally jeopardizes associated business models. At the same time, however, the heat network infrastructure may play a crucial role in expected energy systems since both use of local energy sources efficiently and on a large scale (e.g., geothermal sources, waste incineration, waste heat from industry, etc.) and unburden the electricity sector taking into account the aim of high electrification of different energy services. These trade-offs should be given greater consideration in the future and may have implications for the regulation and benchmarking of heat supply companies that provide centralized heat network infrastructure.

Future work may address improvements of the proposed downscaling technique for the heating sector, taking into account a finer scale of spatial granularity, extensions of the introduced benchmarking of centralized heat networks using

indicator values in the context of heat sources and local characteristics, higher resolution of the heat generation technologies/sources in terms of requirements for heat network infrastructure, and a detailed cost-benefit analysis of the centralized heat systems obtained by the downscaling (e.g., distribution line capacities, connection capacities to the public grid, etc.).

Declaration of interests

None.

Declaration of Competing Interest

The authors report no declarations of interest.

Acknowledgments

References

[1] Agreement, Paris, Paris agreement, in: Report of the Conference of the Parties to the United Nations Framework Convention on Climate Change (21st Session, 2015: Paris). Retrived December, Vol. 4, HeinOnline, 2015, p. 2017.

[2] O. Edenhofer, R. Pichs-Madruga, Y. Sokona, K. Seyboth, P. Matschoss, S. Kadner, T. Zwickel, P. Eickemeier, G. Hansen, S. Schlömer, et al., IPCC special report on renewable energy sources and climate change mitigation, Prepared By Working Group III of the Intergovernmental Panel on Climate Change, Cambridge University Press, Cambridge, UK (2011).

[3] S. Inage, Y. Uchino, Development of an integrated infrastructure simulator for sustainable urban energy optimization and its application, Sustainable Energy Technologies and Assessments 39 (2020) 100710. `doi:https://doi.org/10.1016/j.seta.2020.100710`.

[4] H. Zinko, B. Bøhm, H. Kristjansson, U. Ottosson, M. Rama, K. Sipila, District heating distribution in areas with low heat demand density, The 11th International Symposium on District Heating and Cooling, Reykjavik, Iceland (2008).

[5] T. Nussbaumer, S. Thalmann, Influence of system design on heat distribution costs in district heating, Energy 101 (2016) 496–505. `doi:https://doi.org/10.1016/j.energy.2016.02.062`.

[6] K. Laasasenaho, A. Lensu, R. Lauhanen, J. Rintala, Gis-data related route optimization, hierarchical clustering, location optimization, and kernel density methods are useful for promoting distributed bioenergy plant planning in rural areas, Sustainable Energy Technologies and Assessments 32 (2019) 47–57. `doi:https://doi.org/10.1016/j.seta.2019.01.006`.

[7] H. Gopalakrishnan, D. Kosanovic, Economic optimization of combined cycle district heating systems, Sustainable Energy Technologies and Assessments 7 (2014) 91–100. `doi:https://doi.org/10.1016/j.seta.2014.03.006`.

[8] I. Andrić, J. Fournier, B. Lacarrière, O. Le Corre, P. Ferrão, The impact of global warming and building renovation measures on district heating system techno-economic parameters, Energy 150 (2018) 926–937. `doi:https://doi.org/10.1016/j.energy.2018.03.027`.

[9] M. Rabani, H. B. Madessa, N. Nord, Achieving zero-energy building performance with thermal and visual comfort enhancement through optimization of fenestration, envelope, shading device, and energy supply system, Sustainable Energy Technologies and Assessments 44 (2021) 101020. `doi:https://doi.org/10.1016/j.seta.2021.101020`.

32

[10] U. Persson, S. Werner, Heat distribution and the future competitiveness of district heating, Applied Energy 88 (3) (2011) 568–576. `doi:https://doi.org/10.1016/j.apenergy.2010.09.020`.

[11] C. Reidhav, S. Werner, Profitability of sparse district heating, Applied Energy 85 (9) (2008) 867–877. `doi:https://doi.org/10.1016/j.apenergy.2008.01.006`.

[12] D. Zhang, B. Zhang, Y. Zheng, R. Zhang, P. Liu, Z. An, Economic assessment and regional adaptability analysis of cchp system coupled with biomass-gas based on year-round performance, Sustainable Energy Technologies and Assessments 45 (2021) 101141. `doi:https://doi.org/10.1016/j.seta.2021.101141`.

[13] J. Rockström, O. Gaffney, J. Rogelj, M. Meinshausen, N. Nakicenovic, H. J. Schellnhuber, A roadmap for rapid decarbonization, Science 355 (6331) (2017) 1269–1271. `doi:https://doi.org/10.1126/science.aah3443`.

[14] B. D. Leibowicz, C. M. Lanham, M. T. Brozynski, J. R. Vázquez-Canteli, N. C. Castejón, Z. Nagy, Optimal decarbonization pathways for urban residential building energy services, Applied Energy 230 (2018) 1311–1325. `doi:https://doi.org/10.1016/j.apenergy.2018.09.046`.

[15] X. Pan, H. Wang, L. Wang, W. Chen, Decarbonization of china's transportation sector: in light of national mitigation toward the paris agreement goals, Energy 155 (2018) 853–864. `doi:https://doi.org/10.1016/j.energy.2018.04.144`.

[16] G. Habert, S. Miller, V. John, J. Provis, A. Favier, A. Horvath, K. Scrivener, Environmental impacts and decarbonization strategies in the cement and concrete industries, Nature Reviews Earth & Environment 1 (11) (2020) 559–573. `doi:https://doi.org/10.1038/s43017-020-0093-3`.

[17] E. Bakhtavar, T. Prabatha, H. Karunathilake, R. Sadiq, K. Hewage, Assessment of renewable energy-based strategies for net-zero energy communities: A planning model using multi-objective goal programming, Journal of Cleaner Production 272 (2020) 122886. `doi:https://doi.org/10.1016/j.jclepro.2020.122886`.

[18] K. Oshiro, S. Fujimori, Y. Ochi, T. Ehara, Enabling energy system transition toward decarbonization in japan through energy service demand reduction, Energy 227 (2021) 120464. `doi:https://doi.org/10.1016/j.energy.2021.120464`.

[19] A. Grubler, C. Wilson, N. Bento, B. Boza-Kiss, V. Krey, D. L. McCollum, N. D. Rao, K. Riahi, J. Rogelj, S. De Stercke, et al., A low energy demand scenario for meeting the 1.5 c target and sustainable development goals without negative emission technologies, Nature energy 3 (6) (2018) 515–527. `doi:https://doi.org/10.1038/s41560-018-0172-6`.

[20] B. Van Ruijven, D. P. Van Vuuren, B. De Vries, The potential role of hydrogen in energy systems with and without climate policy, International Journal of Hydrogen Energy 322 (12) (2007) 1655–1672. `doi:https://doi.org/10.1016/j.ijhydene.2006.08.036`.

[21] S. van Renssen, The hydrogen solution?, Nature Climate Change 10 (9) (2020) 799–801. `doi:https://doi.org/10.1038/s41558-020-0891-0`.

[22] H. Böhm, S. Moser, S. Puschnigg, A. Zauner, Power-to-hydrogen & district heating: Technology-based and infrastructure-oriented analysis of (future) sector coupling potentials, International Journal of Hydrogen Energy (2021). `doi:https://doi.org/10.1016/j.ijhydene.2021.06.233`.

[23] H. Dowlatabadi, Integrated assessment models of climate change: An incomplete overview, Energy Policy 23 (4-5) (1995) 289–296. `doi:https://doi.org/10.1016/0301-4215(95)90155-Z`.

[24] V. Krey, F. Guo, P. Kolp, W. Zhou, R. Schaeffer, A. Awasthy, C. Bertram, H.-S. de Boer, P. Fragkos, S. Fujimori, et al., Looking under the hood: A comparison of techno-economic assumptions across national and global integrated assessment models, Energy 172 (2019) 1254–1267. `doi:https://doi.org/10.1016/j.energy.2018.12.131`.

[25] M. Harmsen, E. Kriegler, D. P. van Vuuren, K.-I. van der Wijst, G. Luderer, R. Cui, O. Dessens, L. Drouet, J. Emmerling, J. F. Morris, et al., Integrated assessment model diagnostics: key indicators and model evolution, Environmental Research Letters 16 (5) (2021) 054046. `doi:https://doi.org/10.1088/1748-9326/abf964`.

[26] J. T. Wilkerson, B. D. Leibowicz, D. D. Turner, J. P. Weyant, Comparison of integrated assessment models: carbon price impacts on US energy, Energy Policy 76 (2015) 18–31. `doi:https://doi.org/10.1016/j.enpol.2014.10.011`.

[27] D. P. Van Vuuren, H. Van Soest, K. Riahi, L. Clarke, V. Krey, E. Kriegler, J. Rogelj, M. Schaeffer, M. Tavoni, Carbon budgets and energy transition pathways, Environmental Research Letters 11 (7) (2016) 075002. `doi:https://doi.org/10.1088/1748-9326/11/7/075002`.

[28] V. J. Schwanitz, Evaluating integrated assessment models of global climate change, Environmental Modelling & Software 50 (2013) 120–131. `doi:https://doi.org/10.1016/j.envsoft.2013.09.005`.

[29] A. Gambhir, I. Butnar, P.-H. Li, P. Smith, N. Strachan, A review of criticisms of integrated assessment models and proposed approaches to address these, through the lens of BECCS, Energies 12 (9) (2019) 1747. `doi:https://doi.org/10.3390/en12091747`.

[30] H.-K. Ringkjøb, P. M. Haugan, I. M. Solbrekke, A review of modelling tools for energy and electricity systems with large shares of variable renewables, Renewable and Sustainable Energy Reviews 96 (2018) 440–459. `doi:https://doi.org/10.1016/j.rser.2018.08.002`.

[31] P. Capros, N. Tasios, A. De Vita, L. Mantzos, L. Paroussos, Model-based analysis of decarbonising the EU economy in the time horizon to 2050, Energy Strategy Reviews 1 (2) (2012) 76–84. doi:https://doi.org/10.1016/j.esr.2012.06.003.

[32] K. Löffler, K. Hainsch, T. Burandt, P.-Y. Oei, C. Kemfert, C. Von Hirschhausen, Designing a model for the global energy system—GENeSYS-MOD: an application of the open-source energy modeling system (OSeMOSYS), Energies 10 (10) (2017) 1468. doi:https://doi.org/10.3390/en10101468.

[33] S. Backe, M. Korpås, A. Tomasgard, Heat and electric vehicle flexibility in the European power system: A case study of Norwegian energy communities, International Journal of Electrical Power & Energy Systems 125 (2021) 106479. doi:https://doi.org/10.1016/j.ijepes.2020.106479.

[34] D. Van Vuuren, P. Lucas, H. Hilderink, D. P. van Vuuren, Downscaling drivers of global environmental change, Enabling use of global SRES scenarios at the national and grid levels. MNP Report 550025001 (2006) 2006.

[35] J. T. Sherba, B. M. Sleeter, A. W. Davis, O. Parker, Downscaling global land-use/land-cover projections for use in region-level state-and-transition simulation modeling, AIMS Environmental Science 2 (3) (2015) 623–647. doi:http://dx.doi.org/10.3934/environsci.2015.3.623.

[36] F. Pretis, M. Roser, Carbon dioxide emission-intensity in climate projections: Comparing the observational record to socio-economic scenarios, Energy 135 (2017) 718–725. doi:https://doi.org/10.1016/j.energy.2017.06.119.

[37] Y.-H. Ahn, J.-H. Woo, F. Wagner, S. J. Yoo, Downscaled energy demand projection at the local level using the iterative proportional fitting procedure, Applied Energy 238 (2019) 384–400. doi:https://doi.org/10.1016/j.apenergy.2019.01.051.

[38] D. P. van Vuuren, S. J. Smith, K. Riahi, Downscaling socioeconomic and emissions scenarios for global environmental change research: a review, Wiley Interdisciplinary Reviews: Climate Change 1 (3) (2010) 393–404. `doi:https://doi.org/10.1002/wcc.50`.

[39] M. S. Alam, P. Duffy, B. Hyde, A. McNabola, Downscaling national road transport emission to street level: A case study in dublin, ireland, Journal of Cleaner Production 183 (2018) 797–809. `doi:https://doi.org/10.1016/j.jclepro.2018.02.206`.

[40] I. Vallios, T. Tsoutsos, G. Papadakis, Design of biomass district heating systems, Biomass and bioenergy 33 (4) (2009) 659–678. `doi:https://doi.org/10.1016/j.biombioe.2008.10.009`.

[41] K. Ericsson, S. Werner, The introduction and expansion of biomass use in swedish district heating systems, Biomass and bioenergy 94 (2016) 57–65. `doi:https://doi.org/10.1016/j.biombioe.2016.08.011`.

[42] T. Fruergaard, T. H. Christensen, T. Astrup, Energy recovery from waste incineration: Assessing the importance of district heating networks, Waste Management 30 (7) (2010) 1264–1272. `doi:https://doi.org/10.1016/j.wasman.2010.03.026`.

[43] I. G. Jensen, F. Wiese, R. Bramstoft, M. Münster, Potential role of renewable gas in the transition of electricity and district heating systems, Energy Strategy Reviews 27 (2020) 100446. `doi:https://doi.org/10.1016/j.esr.2019.100446`.

[44] P. E. Dodds, I. Staffell, A. D. Hawkes, F. Li, P. Grünewald, W. McDowall, P. Ekins, Hydrogen and fuel cell technologies for heating: A review, International Journal of Hydrogen Energy 40 (5) (2015) 2065–2083. `doi:https://doi.org/10.1016/j.ijhydene.2014.11.059`.

[45] A. Arsalis, Thermodynamic modeling and parametric study of a small-scale natural gas/hydrogen-fueled gas turbine system for decentralized applica-

716 tions, Sustainable Energy Technologies and Assessments 36 (2019) 100560.

717 doi:https://doi.org/10.1016/j.seta.2019.100560.

718 [46] S. A. Kyriakis, P. L. Younger, Towards the increased utilisation of geother-

719 mal energy in a district heating network through the use of a heat storage,

720 Applied Thermal Engineering 94 (2016) 99–110. doi:https://doi.org/

721 10.1016/j.applthermaleng.2015.10.094.

722 [47] J. Unternährer, S. Moret, S. Joost, F. Maréchal, Spatial clustering for dis-

723 trict heating integration in urban energy systems: Application to geother-

724 mal energy, Applied Energy 190 (2017) 749–763. doi:https://doi.org/

725 10.1016/j.apenergy.2016.12.136.

726 [48] J. M. Weinand, M. Kleinebrahm, R. McKenna, K. Mainzer, W. Fichtner,

727 Developing a combinatorial optimisation approach to design district heat-

728 ing networks based on deep geothermal energy, Applied Energy 251 (2019)

729 113367. doi:https://doi.org/10.1016/j.apenergy.2019.113367.

730 [49] A. Zvoleff, A. S. Kocaman, W. T. Huh, V. Modi, The impact of geography

731 on energy infrastructure costs, Energy Policy 37 (10) (2009) 4066–4078.

732 doi:https://doi.org/10.1016/j.enpol.2009.05.006.

733 [50] M. Abuelnasr, W. El-Khattam, I. Helal, Examining the influence of micro-

734 grids topologies on optimal energy management systems decisions using

735 genetic algorithm, Ain Shams Engineering Journal 9 (4) (2018) 2807–2814.

736 doi:https://doi.org/10.1016/j.asej.2017.09.002.

737 [51] C. Bordin, A. Gordini, D. Vigo, An optimization approach for district heat-

738 ing strategic network design, European Journal of Operational Research

739 252 (1) (2016) 296–307. doi:https://doi.org/10.1016/j.ejor.2015.

740 12.049.

741 [52] O. Shekoofa, S. Karbasian, Design criteria for electrical power subsys-

742 tem's topology selection, in: 2013 6th International Conference on Re-

38

743   cent Advances in Space Technologies (RAST), IEEE, 2013, pp. 559–564.

744   `doi:https://doi.org/10.1109/RAST.2013.6581274.`

745 [53] A. Allen, G. Henze, K. Baker, G. Pavlak, Evaluation of low-exergy heating

746   and cooling systems and topology optimization for deep energy savings at

747   the urban district level, Energy Conversion and Management 222 (2020)

748   113106. `doi:https://doi.org/10.1016/j.enconman.2020.113106.`

749 [54] S. H. Strogatz, Exploring complex networks, Nature 410 (6825) (2001) 268–

750   276. `doi:https://doi.org/10.1038/35065725.`

751 [55] A. Sanfeliu, K.-S. Fu, A distance measure between attributed relational

752   graphs for pattern recognition, IEEE transactions on systems, man, and

753   cybernetics (3) (1983) 353–362. `doi:https://doi.org/10.1109/TSMC.`

754   `1983.6313167.`

755 [56] Z. Huang, Link prediction based on graph topology: The predictive value

756   of generalized clustering coefficient, Available at SSRN 1634014 (2010).

757   `doi:https://dx.doi.org/10.2139/ssrn.1634014.`

758 [57] Y. Cui, X. Wang, J. Li, Detecting overlapping communities in networks

759   using the maximal sub-graph and the clustering coefficient, Physica A:

760   Statistical Mechanics and its Applications 405 (2014) 85–91. `doi:https:`

761   `//doi.org/10.1016/j.physa.2014.03.027.`

762 [58] S. F. Nilsson, C. Reidhav, K. Lygnerud, S. Werner, Sparse district-heating

763   in sweden, Applied Energy 85 (7) (2008) 555–564. `doi:https://doi.org/`

764   `10.1016/j.apenergy.2007.07.011.`

765 [59] I. Dochev, I. Peters, H. Seller, G. K. Schuchardt, Analysing district heating

766   potential with linear heat density. a case study from hamburg., Energy

767   Procedia 149 (2018) 410–419. `doi:https://doi.org/10.1016/j.egypro.`

768   `2018.08.205.`

769 [60] M. J. Gidden, D. Huppmann, pyam: a python package for the analysis

770   and visualization of models of the interaction of climate, human, and en-

771   vironmental systems, Journal of Open Source Software 4 (33) (2019) 1095.

772   `doi:https://doi.org/10.21105/joss.01095.`

773 [61] D. Huppmann, M. Gidden, Z. Nicholls, J. Hörsch, R. Lamboll, P. Kishi-

774   moto, T. Burandt, O. Fricko, E. Byers, J. Kikstra, et al., pyam: Analy-

775   sis and visualisation of integrated assessment and macro-energy scenarios,

776   Open Research Europe 1 (2021) e74. `doi:https://doi.org/10.12688/`

777   `openreseurope.13633.1.`

778 [62] A. Hagberg, P. Swart, D. S Chult, Exploring network structure, dynamics,

779   and function using networkx, Tech. rep., Los Alamos National Lab.(LANL),

780   Los Alamos, NM (United States) (2008).

781   URL `https://www.osti.gov/biblio/960616`

782 [63] H. Auer, P. C. del Granado, D. Huppmann, P.-Y. Oei, K. Hainsch,

783   K. Löffler, T. Burandt, Quantitative Scenarios for Low Carbon Futures

784   of the Pan-European Energy System, Deliverable D3.1, openENTRANCE,

785   `https://openentrance.eu/` (2020).

786 [64] H. Auer, P. C. del Granado, P.-Y. Oei, K. Hainsch, K. Löffler, T. Bu-

787   randt, D. Huppmann, I. Grabaak, Development and modelling of different

788   decarbonization scenarios of the European energy system until 2050 as a

789   contribution to achieving the ambitious 1.5°C climate target–establishment

790   of open source/data modelling in the European H2020 project openEN-

791   TRANCE, e & i Elektrotechnik und Informationstechnik (2020) 1–13. `doi:`

792   `https://doi.org/10.1007/s00502-020-00832-7.`

793 [65] T. Burandt, K. Löffler, K. Hainsch, GENeSYS-MOD v2.0 - Enhancing the

794   Global Energy System Model: Model improvements, framework changes,

795   and European data set, Tech. rep., DIW Data Documentation (2018).

796 [66] D. Huppmann, E. Kriegler, V. Krey, IAMC 1.5°C Scenario Explorer and

797   Data hosted by IIASA (2019).

798   URL `https://data.ene.iiasa.ac.at/iamc-1.5c-explorer/`

Appendix A. Data and further empirical settings

	Description	Data availability	Data source
GENeSYS-MOD v2.0	Heat generation by source	[66]	[32]
Austrian population density	in 2019	*Statistik Austria*	as availability
Austrian population	in 2050	*Eurostat*	as availability

Table A.1: Empirical data settings

41