


ERGO TPS

LINE: PRIME



DESCRIPTION

Compact size, high performance and durability are the main features of ERGO TPS breathing air compressors. They are equipped with four different pumping units (MCH 13, MCH 16, MCH 21 and MCH 23) all in TPS (Tropical Plus Superdry) version and powered by three-phase electric motors or combustion engines, Honda for the petrol version, Lombardini for the diesel version. Compressors are equipped with a panel complete of monitoring system including pressure gauges, autostop with adjustable pressure switch, automatic condensate drain and direction of rotation control. The models of this line have two high pressure hose connections (from 232 to 330 bar) and an increased filtering system with two Hyperfilters. A remote refill panel is available as an optional.

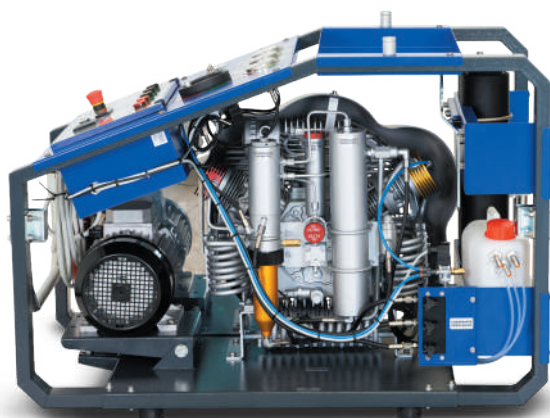

DRIVEN BY

Three-phase electric motor

HONDA GX390

Kohler/Lombardini KD15-440

CHARGING RATE

From 235 to 380 l/m


WORKING PRESSURE

From 232 to 330 Bar


FILLING TIME*

From 8 min. 30 sec. to
5 min. 15 sec.

MCH 13-16 TPS PUMPING UNIT

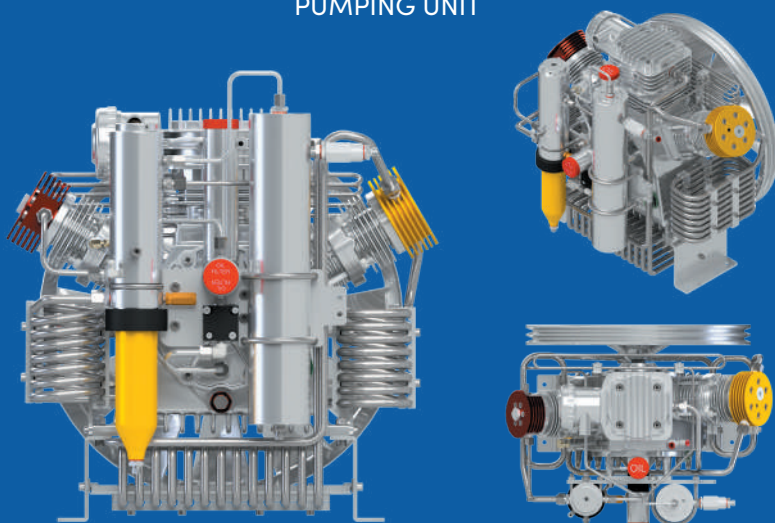

MCH 21-23 TPS PUMPING UNIT

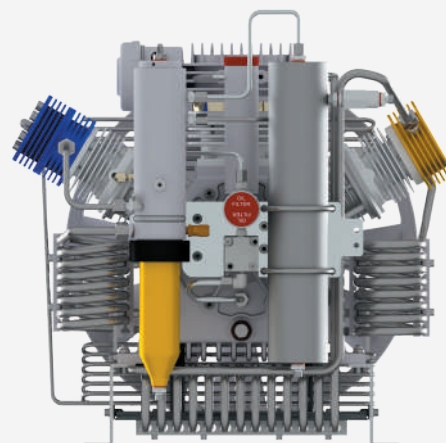

TECHNICAL DATA

	MCH 13	MCH 16	MCH 21	MCH 23
DRIVEN BY	THREE-PHASE ELECTRIC MOTOR	THREE-PHASE ELECTRIC MOTOR	THREE-PHASE ELECTRIC MOTOR	THREE-PHASE ELECTRIC MOTOR
ENGINE POWER	4 kW - 5.5 Hp	5.5 kW - 7.5 Hp	7.5 kW - 10 Hp	7.5 kW - 10 Hp
CHARGING RATE	235 l/min - 14.1 m³/h 8.3 CFM FAD	315 l/min - 18.9 m³/h 11.1 CFM FAD	345 l/min - 20.7 m³/h 12.2 CFM FAD	380 l/min - 22.8 m³/h 13.4 CFM FAD
FILLING TIME*	8 min. 30 sec.	6 min. 20 sec.	5 min. 40 sec.	5 min. 15 sec.
WORKING PRESSURE	232 - 300 - 330 bar 3365 - 4351 - 4786 psig	232 - 300 - 330 bar 3365 - 4351 - 4786 psig	232 - 300 - 330 bar 3365 - 4351 - 4786 psig	232 - 300 - 330 bar 3365 - 4351 - 4786 psig
NET WEIGHT APPROX.	174 kg - 384 lb	184 kg - 406 lb	184 kg - 406 lb	184 kg - 406 lb
NOISE	80.7 dB	82.3 dB	83 dB	83 dB

*Filling time cylinder 10 l-0/200 bar (measured by filling cylinder from 0 to 200 bar ±5%)

AVAILABLE ON REQUEST: MCH 13 / MCH 16 SINGLE-PHASE ELECTRIC MOTOR

STANDARD

- DRV 232 BAR - 3365 PSIG /
DRV 300 BAR - 4351 PSIG
2 valves DRV
(P. 51)
- FILLING HOSES
2 filling hoses 1.2 m
3.9 ft length
- PRESSURE GAUGES
interstage control
- THERMOSTAT
Cabin temperature
thermostat/auto shut-off
- DOUBLE HYPERFILTER
FILTRATION
PED certificated
(P. 53)
- AUTOMATIC CONDENSATE
DRAIN
- PRESSURE SWITCH
auto shut-off
- OIL LEVEL
switch/auto shut-off
- OIL PUMP




OPTIONAL

- REMOTE FILLING PANELS
(P. 50)
- PRESEC
visual filtration saturation indicator
(P. 45)
- FILLING HOSES
length: 1.5 - 2 - 3 - 4 - 5 - 8 - 10 m
4.9 - 6.5 - 9.8 - 13.1 - 16.4 - 26.2 - 32.8 ft

CYLINDERS REFILL

CYLINDERS	LITERS	MCH 13	MCH 16	MCH 21	MCH 23	NUMBER OF REFILLED CYLINDERS PER HOUR
	10	7	9.5	10.5	11.5	
	11.1	6.5	9	9.5	10.5	
	15	5	6.5	7	8	
	10+10	3.5	5	5.5	6	

DIMENSIONS AND MACHINE PARTS

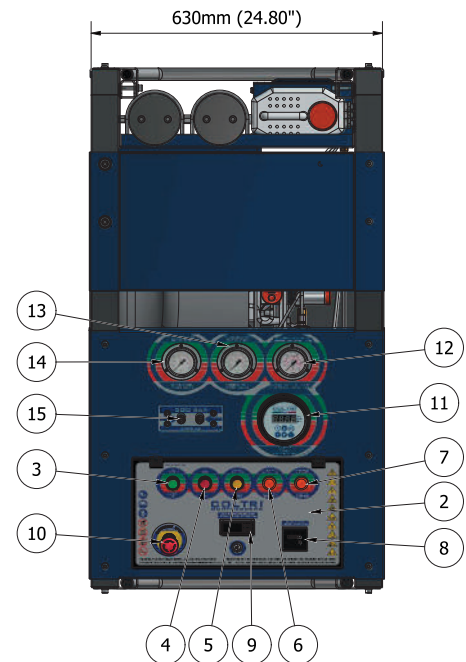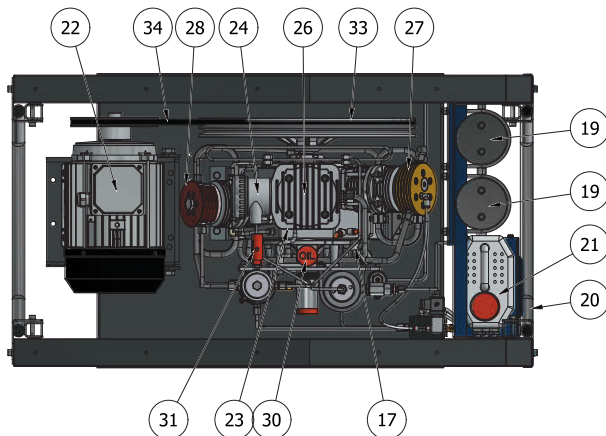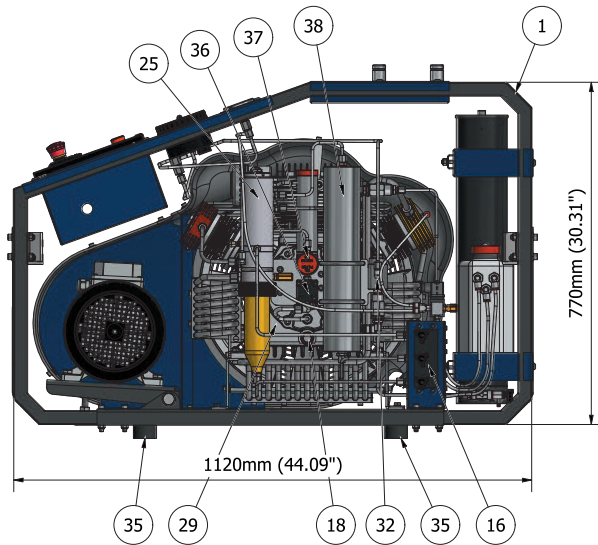

- | | | |
|---|--|-----------------------------------|
| 1 Frame | 13 2 nd stage pressure gauge | 27 2 nd stage |
| 2 Control panel | 14 1 st stage pressure gauge | 28 3 rd stage |
| 3 On pushbutton | 15 Refill hoses connection | 29 Crankcase |
| 4 Off pushbutton | 16 Condensate drain valves | 30 Oil filler plug |
| 5 Condensate drain pushbutton | 17 Oil level gauge | 31 Safety valve |
| 6 Oil level warning light | 18 Oil drain valves | 32 Maintenance valve |
| 7 Wrong rotation direction alert | 19 Purifier filter | 33 Cooling fan |
| 8 Hour counter | 20 Handles | 34 Belt |
| 9 Cabinet interior / cooling air temperature | 21 Condensate collection tank | 35 Anti-vibration device |
| 10 Emergency pushbutton | 22 Motor | 36 Oil pump |
| 11 Automatic shutdown pressure switch | 23 Compressor | 37 Oil filter |
| 12 3 rd stage pressure gauge | 24 Air filter | 38 HP condensate separator |
| | 25 Condensate separator | |
| | 26 1 st stage | |

TECHNICAL DATA

	MCH 23 PETROL	MCH 23 DIESEL
DRIVEN BY	HONDA GX390	Kohler/Lombardini KD15-440 electric start
ENGINE POWER	9 kW - 12 Hp	7.5 kW - 10 Hp
CHARGING RATE	320 l/min - 19.2 m ³ /h 11.3 CFM FAD	320 l/min - 19.2 m ³ /h 11.3 CFM FAD
FILLING TIME*	6 min. 15 sec.	5 min. 15 sec.
WORKING PRESSURE	232 - 300 - 330 bar 3365 - 4351 - 4786 psig	232 - 300 - 330 bar 3365 - 4351 - 4786 psig
NET WEIGHT APPROX.	164 kg - 361 lb	164 kg - 361 lb
NOISE	95.6 dB	83 dB

*Filling time cylinder 10 l-0/200 bar (measured by filling cylinder from 0 to 200 bar ±5%)

STANDARD


- DRV 232 BAR - 3365 PSIG /
DRV 300 BAR - 4351 PSIG
2 valves DRV
(P. 51)
- DOUBLE HYPERFILTER
FILTRATION
PED certificated
(P. 53)
- FILLING HOSES
2 filling hoses 1.2 m
3.9 ft lenght
- ELETTRIC STARTER
- AUTOSTOP
232 bar - 300 bar
- AUTOMATIC CONDENSATE
DRAIN

OPTIONAL

- REMOTE FILLING PANELS
(P. 50)
- FILLING HOSES
lenght: 1.5 - 2 - 3 - 4 - 5 - 8 - 10 m
4.9 - 6.5 - 9.8 - 13.1 - 16.4 - 26.2 - 32.8 ft
- DIGITAL HOUR METER
(Available only for: HONDA GX390)

CYLINDERS REFILL

CYLINDERS	LITERS	MCH 23 PETROL	MCH 23 DIESEL	NUMBER OF REFILLED CYLINDERS PER HOUR
	10	10	11.5	
	11.1	9	10.5	
	15	6.5	8	
	10+10	5	6	

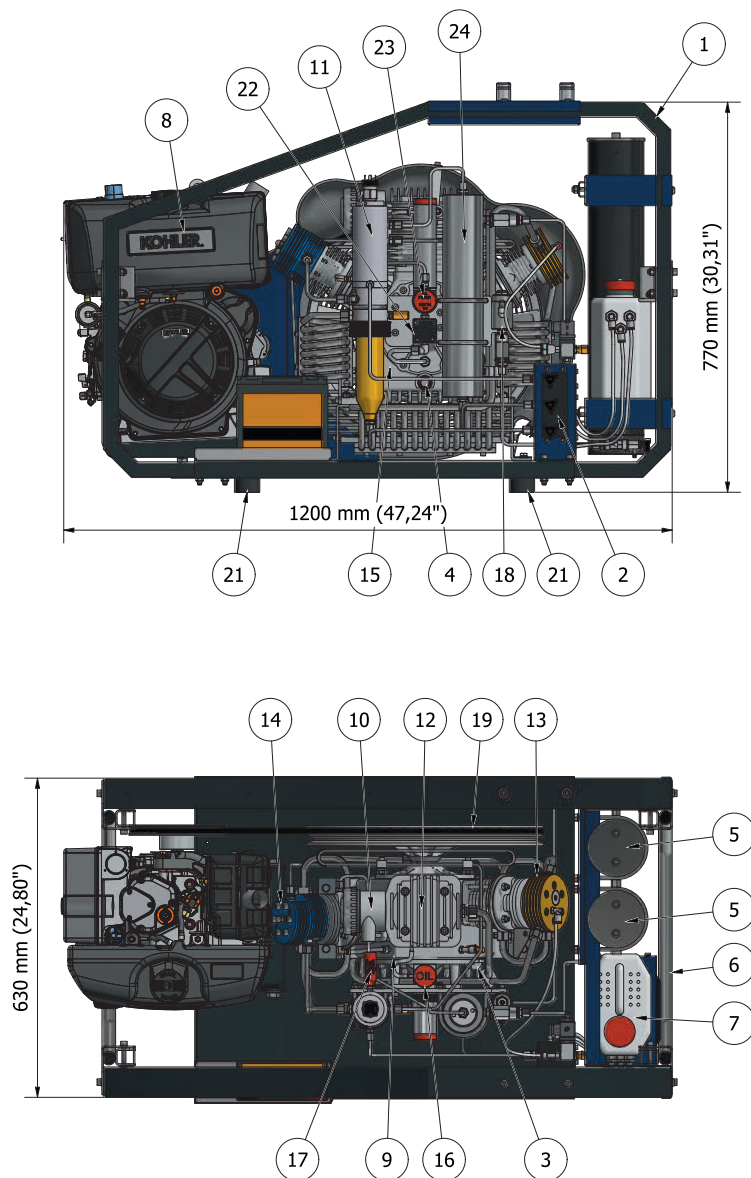

- | | | | |
|----|----------------------------|----|-----------------------|
| 1 | Frame | 13 | 2 nd stage |
| 2 | Condensate drain valves | 14 | 3 rd stage |
| 3 | Check valve | 15 | Crankcase |
| 4 | Oil drain valves | 16 | Oil filler plug |
| 5 | Hyperfilter | 17 | Safety valve |
| 6 | Handles | 18 | Maintenance valve |
| 7 | Condensate collection tank | 19 | Cooling fan |
| 8 | Internal combustion engine | 20 | Belt |
| 9 | Compressor | 21 | Anti-vibration device |
| 10 | Air filter | 22 | Oil pump |
| 11 | Condensate separator | 23 | Oil filter |
| 12 | 1 st stage | 24 | Purifier filter |