`fall_n` — Technical Documentation

Simplex Elements, Quadrature Theory,
Element Architecture, and Implementation Decisions

S. E. Chavarría-Miranda

March 12, 2026

Abstract

This document provides a comprehensive technical reference for the `fall_n` nonlinear finite element library. It covers the implementation of simplex (tetrahedral) finite elements, numerical integration strategies on simplicial domains, the engineering decisions made to ensure robust post-processing, and the layered element architecture with its policy-based design patterns.

Key topics include:

- Lagrange shape functions on the reference simplex and their isoparametric mapping to physical space;
- Classical simplex quadrature rules and their negative-weight pathology;
- The Stroud conical product rule with Gauss–Jacobi nodes via the Golub–Welsch algorithm as an all-positive-weight alternative;
- Diagnosis and resolution of the checkerboard artefact in lumped L^2 projections on quadratic tetrahedra;
- Volume-weighted (SPR-type) nodal averaging as a robust projection method;
- A bug fix in PETSc 3.24.5 `section.c` and application-level workarounds for PETSc indexing and preallocation issues;
- The element architecture design: External Polymorphism at the geometry and assembly levels, policy-based customisation points (MaterialPolicy, KinematicPolicy, ElementPolicy), compile-time efficiency, and comparison with OpenSees and Kratos Multiphysics.

Each chapter includes the relevant mathematical theory with bibliographic references, the concrete C++ implementation in `fall_n`, and a discussion of the design rationale.

Contents

1 Simplex Finite Elements **4**
1.1 Reference Simplex . . . 4
1.2 Lagrange Shape Functions . . . 4
1.2.1 Linear Elements (Order 1) . . . 4
1.2.2 Quadratic Elements (Order 2) . . . 5
1.3 Shape Function Derivatives . . . 5
1.4 Isoparametric Mapping . . . 5
1.5 Subentity Topology: Faces of the Simplex . . . 6
1.5.1 Face Local Node Ordering (TET10) . . . 6
1.6 Gmsh Node Ordering for TET10 . . . 6
1.7 Implementation in `fall_n` . . . 7

2 Numerical Quadrature on Simplices **8**
2.1 Problem Statement . . . 8
2.2 Classical Symmetric Rules . . . 8
2.2.1 Centroid Rule (Degree 1) . . . 8
2.2.2 Hammer–Marlowe–Stroud Rules (HMS) . . . 8
2.2.3 Keast Rules . . . 9
2.2.4 Grundmann–Möller Rules . . . 9
2.3 Stroud Conical Product Rule . . . 9
2.3.1 Duffy Transform . . . 10
2.3.2 Product Quadrature with Gauss–Jacobi Nodes . . . 10
2.3.3 Cost Comparison . . . 11
2.4 Gauss–Jacobi Quadrature via the Golub–Welsch Algorithm . . . 11
2.4.1 Jacobi Polynomials . . . 11
2.4.2 The Golub–Welsch Algorithm . . . 11
2.4.3 Mapping to $[0, 1]$ . . . 12
2.5 Implementation: `StroudConicalProduct.hh` . . . 12
2.6 Default Quadrature Choices in `fall_n` . . . 13

3 Negative Weights and the Checkerboard Artefact **14**
3.1 Symptom: Element-Level Checkerboard Pattern . . . 14
3.2 Root Cause Analysis . . . 14
3.2.1 The Keast 5-Point Rule Weights . . . 15
3.2.2 TET10 Vertex Shape Functions at Quadrature Points . . . 15
3.2.3 The Denominator Catastrophe . . . 15
3.2.4 Consequence: Sign Flip or Division by Zero . . . 16
3.3 Why HEX27 Is Unaffected . . . 16
3.4 Resolution: Two Complementary Fixes . . . 16
3.4.1 Fix 1: Switch to an All-Positive-Weight Quadrature Rule . . . 16
3.4.2 Fix 2: Guard Against Negative Denominators . . . 16

3.4.3 Fix 3 (Recommended): SPR Volume-Weighted Averaging . . . 17
3.5 Summary . . . 17

4 Gauss-Point to Nodal Projection **18**
4.1 Lumped L^2 Projection . . . 18
4.1.1 Consistent L^2 Projection . . . 18
4.1.2 Row-Sum Lumping . . . 18
4.2 Volume-Weighted Averaging (SPR-Type) . . . 19
4.2.1 Motivation . . . 19
4.2.2 Algorithm . . . 19
4.2.3 Robustness Guarantee . . . 19
4.2.4 Comparison with Lumped L^2 . . . 20
4.3 Implementation: `spr_average_to_nodes()` . . . 20
4.4 Verification . . . 20

5 PETSc Patch: `section.c` Indexing Bug **21**
5.1 Context: DMPlex and PetscSection . . . 21
5.2 The Bug . . . 21
5.3 Manifestation in `fall_n` . . . 22
5.4 The Fix . . . 22
5.5 Verification . . . 22
5.6 Upstream Status . . . 22
5.7 Workaround from Application Code . . . 23
5.7.1 Workaround 1: Extend the Section Chart . . . 23
5.7.2 Workaround 2: Allow Dynamic Matrix Allocation . . . 23
5.7.3 Verification . . . 24

6 Implementation Summary and Design Decisions **25**
6.1 Architecture Overview . . . 25
6.2 Design Decisions . . . 25
6.2.1 Decision 1: HMS 4-Point as Default TET10 Quadrature . . . 25
6.2.2 Decision 2: Golub–Welsch for Gauss–Jacobi Quadrature . . . 26
6.2.3 Decision 3: SPR Volume-Weighted Averaging as Default Projection . . . 26
6.2.4 Decision 4: Gmsh TET10 Node Reordering . . . 27
6.2.5 Decision 5: PETSc Section Patch . . . 27
6.3 Nonlinear Showcase (`main.cpp`) . . . 27
6.4 Test Suite . . . 28
6.5 File Inventory . . . 29

7 Element Architecture: Design Patterns and Extensibility **30**
7.1 Guiding Principles . . . 30
7.2 Layer Decomposition . . . 30
7.2.1 Layer 1: Concrete Geometry Types . . . 31
7.2.2 Layer 2: ElementGeometry (Type-Erased Handle) . . . 31
7.2.3 Layer 3: Physical Elements . . . 33
7.2.4 Layer 4: Analysis Level . . . 33
7.3 FEM_Element: Top-Level Type Erasure . . . 33
7.4 Policy-Based Design: Customisation Points . . . 34
7.4.1 MaterialPolicy . . . 34
7.4.2 KinematicPolicy . . . 34
7.4.3 ElementPolicy (Storage Strategy) . . . 35
7.4.4 AssemblyPolicy (Beams) . . . 35

7.4.5 ConstitutiveStrategy (Material Update) . . . 36
7.5 Compile-Time Cost Analysis . . . 36
7.6 Comparison with OpenSees and Kratos . . . 37
7.6.1 Overview . . . 37
7.6.2 OpenSees . . . 37
7.6.3 Kratos Multiphysics . . . 38
7.6.4 Summary: Architectural Trade-offs . . . 38
7.7 Extensibility Guide: Adding a New Element Family . . . 39
7.8 Runtime Efficiency Considerations . . . 40
7.8.1 Virtual Dispatch Budget . . . 40
7.8.2 Cache-Friendly Layout . . . 40
7.8.3 DOF Index Caching . . . 40
7.8.4 Stack-Allocated Jacobians . . . 40

8 Generic Boundary and Initial Condition Infrastructure 41
8.1 Gap Analysis: the Legacy API . . . 41
8.2 Design Decisions and Trade-offs . . . 41
8.2.1 Compile-Time Polymorphism via Concepts . . . 41
8.2.2 Constraint Storage: Extending the Existing Map . . . 42
8.2.3 Non-Zero Dirichlet: Where Values Flow . . . 43
8.2.4 ModelState: Platform-Independent Snapshot . . . 43
8.3 Implementation . . . 43
8.3.1 NodeSelector.hh Built-in Selectors . . . 43
8.3.2 Model.hh New Constraint Methods . . . 44
8.3.3 Backward Compatibility . . . 44
8.4 Use-Case Walkthrough: Roller vs. Clamped Cantilever . . . 44
8.5 State Capture and Continuation Analysis . . . 45
8.5.1 ModelState Structure . . . 45
8.5.2 Capture Workflow . . . 46
8.5.3 Future: Initial Stress Integration . . . 46
8.6 Comparison with OpenSees and Kratos . . . 46
8.7 Extensibility Roadmap . . . 47
8.8 Test Suite . . . 47
8.9 Summary . . . 48

Chapter 1

Simplex Finite Elements

This chapter describes the construction of Lagrangian finite elements on simplicial cells (triangles in 2D, tetrahedra in 3D) as implemented in `fall_n`. The development follows the classical Ciarlet definition [2] specialised to Lagrange interpolation on the reference simplex.

1.1 Reference Simplex

Definition 1.1 (Reference simplex)**.** The *reference simplex* in $\mathbb{R}^D$ is the convex hull

$$\mathcal{S}_D \;=\; \Big\{\boldsymbol{\xi} = (\xi_1, \ldots, \xi_D) \in \mathbb{R}^D \;\Big|\; \xi_i \geq 0,\; \sum_{i=1}^{D} \xi_i \leq 1\Big\}, \tag{1.1}$$

with *vertices*

$$\mathbf{v}_0 = \mathbf{0}, \qquad \mathbf{v}_i = \mathbf{e}_i \quad (i = 1, \ldots, D),$$

where $\mathbf{e}_i$ is the i-th standard basis vector.

The *barycentric coordinates* $(\lambda_0, \lambda_1, \ldots, \lambda_D)$ are defined as

$$\lambda_0 = 1 - \sum_{i=1}^{D} \xi_i, \qquad \lambda_i = \xi_i \quad (i = 1, \ldots, D). \tag{1.2}$$

They form a partition of unity, $\sum_{i=0}^{D} \lambda_i = 1$, and satisfy $\lambda_i \geq 0$ on $\mathcal{S}_D$.

The volume of the reference simplex is

$$|\mathcal{S}_D| = \frac{1}{D!}\,. \tag{1.3}$$

1.2 Lagrange Shape Functions

1.2.1 Linear Elements (Order 1)

The linear simplex has $D+1$ nodes (the vertices). The shape functions are simply the barycentric coordinates:

$$N_i(\boldsymbol{\xi}) = \lambda_i(\boldsymbol{\xi}), \qquad i = 0, 1, \ldots, D. \tag{1.4}$$

Since $\lambda_i \geq 0$ on $\mathcal{S}_D$ and $\lambda_i(\mathbf{v}_j) = \delta_{ij}$, these are the unique linear polynomials that interpolate the nodal values.

Concrete instances in `fall_n`:

- TRI3 ($D = 2$, 3 nodes): `SimplexElement<3,2,1>` (triangle in 3D ambient space, used for boundary faces)
- TET4 ($D = 3$, 4 nodes): `SimplexElement<3,3,1>`

1.2.2 Quadratic Elements (Order 2)

The quadratic simplex has

$$n_{\text{nodes}} = \binom{D+2}{2} = \frac{(D+1)(D+2)}{2} \tag{1.5}$$

nodes: the $D+1$ vertices plus $\binom{D+1}{2}$ edge midpoints.

Vertex shape functions. For vertex i ($i = 0, \ldots, D$):

$$\boxed{N_i(\boldsymbol{\xi}) = \lambda_i\,(2\lambda_i - 1)} \tag{1.6}$$

Remark 1.1 (Sign of vertex shape functions)**.** The vertex shape function $N_i = \lambda_i(2\lambda_i - 1)$ is *negative* whenever $0 < \lambda_i < \frac{1}{2}$. This region is non-empty in the interior of $\mathcal{S}_D$. In particular, interior quadrature points that are "far" from vertex i will have $\lambda_i \ll \frac{1}{2}$, making $N_i < 0$ at those points.

This fact is benign for stiffness matrix assembly (the bilinear form involves gradients, not function values). However, it becomes critical for lumped L^2 projection, as discussed in chapter 3.

Edge midpoint shape functions. For the midpoint of edge (i, j) with $0 \le i < j \le D$:

$$\boxed{N_{ij}(\boldsymbol{\xi}) = 4\,\lambda_i\,\lambda_j} \tag{1.7}$$

These are always non-negative on $\mathcal{S}_D$, since both $\lambda_i, \lambda_j \ge 0$.

Concrete instances:

- TRI6 ($D = 2$, 6 nodes): `SimplexElement<3,2,2>`
- TET10 ($D = 3$, 10 nodes): `SimplexElement<3,3,2>`

1.3 Shape Function Derivatives

Since $\lambda_0 = 1 - \xi_1 - \cdots - \xi_D$ and $\lambda_i = \xi_i$ for $i \ge 1$, the barycentric coordinate gradients (with respect to $\boldsymbol{\xi}$) are:

$$\frac{\partial \lambda_0}{\partial \xi_k} = -1, \qquad \frac{\partial \lambda_i}{\partial \xi_k} = \delta_{ik} \quad (i = 1, \ldots, D). \tag{1.8}$$

For the quadratic vertex shape function $N_i = \lambda_i(2\lambda_i - 1)$:

$$\frac{\partial N_i}{\partial \xi_k} = (4\lambda_i - 1)\,\frac{\partial \lambda_i}{\partial \xi_k}\,. \tag{1.9}$$

For the edge midpoint $N_{ij} = 4\lambda_i\lambda_j$:

$$\frac{\partial N_{ij}}{\partial \xi_k} = 4\Big(\lambda_j\,\frac{\partial \lambda_i}{\partial \xi_k} + \lambda_i\,\frac{\partial \lambda_j}{\partial \xi_k}\Big). \tag{1.10}$$

1.4 Isoparametric Mapping

The isoparametric map from the reference simplex $\mathcal{S}_D$ to a physical element $\Omega^e \subset \mathbb{R}^d$ (with $d \ge D$) is

$$\mathbf{x}(\boldsymbol{\xi}) = \sum_{I=1}^{n_{\text{nodes}}} N_I(\boldsymbol{\xi})\,\mathbf{x}_I, \tag{1.11}$$

where $\mathbf{x}_I \in \mathbb{R}^d$ are the physical nodal coordinates. The *Jacobian matrix* of the mapping is

$$J_{ij} = \frac{\partial x_i}{\partial \xi_j} = \sum_{I=1}^{n_{\text{nodes}}} \frac{\partial N_I}{\partial \xi_j} x_{I,i}\,, \qquad \mathbf{J} \in \mathbb{R}^{d\times D}. \tag{1.12}$$

When $d = D$ (volume elements), $\mathbf{J}$ is square and the differential volume element is $\mathrm{d}\Omega = |\det \mathbf{J}|\,\mathrm{d}\boldsymbol{\xi}$.

When $d > D$ (surface elements, e.g. TRI6 boundary faces in 3D), the surface measure is computed from the metric tensor:

$$\mathrm{d}S = \sqrt{\det(\mathbf{J}^T\mathbf{J})}\,\mathrm{d}\boldsymbol{\xi}. \tag{1.13}$$

Gradient transformation. The gradient of a scalar field in physical space is obtained from the reference-space gradient via

$$\frac{\partial N_I}{\partial x_j} = \sum_{k=1}^{D} \frac{\partial N_I}{\partial \xi_k} (J^{-1})_{kj}\,. \tag{1.14}$$

1.5 Subentity Topology: Faces of the Simplex

A D-simplex has $D+1$ faces (codimension-1 sub-simplices). The f-th face ($f = 0, \ldots, D$) is the sub-simplex *opposite* vertex f, spanned by all vertices *except* $\mathbf{v}_f$.

1.5.1 Face Local Node Ordering (TET10)

For a quadratic tetrahedron ($D = 3$, TET10, 10 nodes), each of the 4 triangular faces is a TRI6 sub-element. The face-to-global node mapping implemented in `SimplexCell<3,2>` is:

Face f	Opposite vertex	Global nodes
0	$\mathbf{v}_0$	(1, 2, 3, 5, 8, 7)
1	$\mathbf{v}_1$	(0, 3, 2, 6, 8, 5)
2	$\mathbf{v}_2$	(0, 1, 3, 4, 7, 6)
3	$\mathbf{v}_3$	(0, 2, 1, 5, 4, 6)

The outward normal direction follows from the right-hand rule applied to the first three (vertex) nodes of each face. This topology is critical for consistent surface traction application via Gauss quadrature on boundary faces.

1.6 Gmsh Node Ordering for TET10

Gmsh uses a different midpoint ordering than `fall_n` [6]. The Gmsh TET10 local ordering is:

Position	0	1	2	3	4	5	6	7	8	9
Gmsh	v_0	v_1	v_2	v_3	m_{01}	m_{12}	m_{02}	m_{03}	m_{13}	m_{23}
`fall_n`	v_0	v_1	v_2	v_3	m_{01}	m_{02}	m_{03}	m_{12}	m_{23}	m_{13}

The reordering applied in `GmshDomainBuilder.hh` maps Gmsh indices to `fall_n` indices via the permutation:

$$(0, 1, 2, 3, 4, 6, 7, 5, 9, 8). \tag{1.15}$$

This is implemented as:

```
index_ordering(node_tags, 0,1,2,3,4,6,7,5,9,8).data()
```

1.7 Implementation in `fall_n`

The simplex element hierarchy consists of three layers:

1. **`SimplexCell<D, Order>`** (`SimplexCell.hh`) — Purely geometric: reference coordinates, shape functions and their derivatives, face topology. All methods are `consteval` or `constexpr`, enabling compile-time evaluation.

2. **`SimplexElement<Dim, TopDim, Order>`** (`SimplexElement.hh`) — Combines a `SimplexCell` with an integration strategy. Template parameters:
   - `Dim`: ambient space dimension (e.g., 3 for 3D problems);
   - `TopDim`: topological dimension (D);
   - `Order`: Lagrange interpolation order.

3. **`ElementGeometry<ElemType, Integrator>`** (`ElementGeometry.hh`) — Manages the Jacobian, physical gradients, and integration; parameterised by element type and quadrature rule. The integrator is a duck-typed object exposing `num_integration_points`, `reference_integration_` and `weight(i)`.

This layered design allows the quadrature rule to be swapped independently of the element geometry, which was crucial for diagnosing and resolving the negative-weight problem (see chapters 2 and 3).

Chapter 2

Numerical Quadrature on Simplices

Numerical integration on simplicial domains is fundamentally different from integration on tensor-product cells (quadrilaterals, hexahedra). On tensor-product cells, one constructs n^D-point rules by taking the Cartesian product of n-point Gauss–Legendre rules in each direction. On simplices, no such natural product structure exists; special rules must be constructed [12, 10].

This chapter surveys the approaches available, documents the rules used in `fall_n`, and motivates the Stroud conical product as the preferred arbitrary-order method.

2.1 Problem Statement

We seek to approximate the integral

$$I[f] = \int_{\mathcal{S}_D} f(\boldsymbol{\xi})\,\mathrm{d}\boldsymbol{\xi} \approx \sum_{g=1}^{n_g} w_g\, f(\boldsymbol{\xi}_g), \tag{2.1}$$

where $\mathcal{S}_D$ is the reference D-simplex (1.1), with volume $|\mathcal{S}_D| = 1/D!$. A rule has *degree of exactness* p if $I[f]$ is computed exactly for all polynomials f of total degree $\leq p$.

Minimum requirements for finite elements. For a displacement-based finite element with polynomial order k and a constitutive law that is polynomial of degree m in the strains:

- Stiffness matrix: needs degree $\geq 2(k-1)m$ (often $2(k-1)$ for linear elasticity, where $m = 1$).
- Mass matrix (or L^2 projection): needs degree $\geq 2k$.
- For TET10 ($k = 2$, $D = 3$): stiffness needs degree ≥ 2; mass/projection needs degree ≥ 4.

2.2 Classical Symmetric Rules

2.2.1 Centroid Rule (Degree 1)

The single-point centroid rule:

$$\boldsymbol{\xi}_1 = \Big(\frac{1}{D+1}, \ldots, \frac{1}{D+1}\Big), \qquad w_1 = \frac{1}{D!}\,. \tag{2.2}$$

This integrates all linear polynomials exactly. It is adequate for constant- strain elements (TET4) when only the stiffness matrix is needed, but insufficient for quadratic elements.

2.2.2 Hammer–Marlowe–Stroud Rules (HMS)

The Hammer–Marlowe–Stroud [9] family provides low- order symmetric rules. The 4-point rule for the tetrahedron, used as the default for TET10 in `fall_n`, has:

n_g	Degree	Description
1	1	Centroid
4	2	Vertices of a smaller inscribed tetrahedron

The 4-point degree-2 rule uses barycentric coordinates:

$$\lambda = (\alpha, \beta, \beta, \beta) \quad \text{and permutations thereof,} \qquad \alpha = \frac{5-\sqrt{5}}{20},\ \beta = \frac{5+3\sqrt{5}}{20}. \tag{2.3}$$

All four weights are equal, $w_g = \frac{1}{4!} = \frac{1}{24}$, and are **strictly positive**.

Remark 2.1. In `fall_n`, this 4-point HMS rule is the *default* quadrature for TET10 elements (`default_simplex_rule<3,2>()` in `SimplexQuadrature.hh`). It was chosen over the 5-point Keast degree-3 rule precisely because all weights are positive — see chapter 3 for the detailed analysis.

2.2.3 Keast Rules

Keast [10] tabulated a series of tetrahedral rules up to degree 8. The most commonly cited are:

n_g	Degree	Min weight	Comment
1	1	$+$	Centroid
4	2	$+$	Same as HMS
5	3	$-$	$w_1 = -\frac{2}{15}$ at centroid
11	4	$+$	All positive
14	5	$+$	All positive
24	6	$-$	Contains negative weights

The 5-point degree-3 rule is particularly notable:

$$\text{Keast-5:} \quad w_1 = -\frac{2}{15}\,|\mathcal{S}_3| = -\frac{2}{15}\cdot\frac{1}{6} = -\frac{1}{45}, \qquad w_{2,\ldots,5} = \frac{3}{40}\,|\mathcal{S}_3| = \frac{1}{80}. \tag{2.4}$$

The centroid weight is *negative*. While this does not affect the accuracy of the quadrature rule (it still integrates degree-3 polynomials exactly), it causes severe problems in lumped L^2 projection on quadratic elements, as analysed in chapter 3.

2.2.4 Grundmann–Möller Rules

The Grundmann–Möller family [8] generates rules of arbitrary odd degree for any simplex dimension, using a combinatorial formula. The rule of index s has degree $2s+1$ with

$$n_g = \binom{D+s+1}{D+1}$$

points. Unfortunately, for $s \geq 1$ (degree ≥ 3), some weights are *guaranteed to be negative*. This makes Grundmann–Möller unsuitable as a general-purpose rule when positive weights are required.

2.3 Stroud Conical Product Rule

The Stroud conical product [12, 4] transforms the simplex integral into a product of 1D integrals via a *collapsed-coordinate* (Duffy) transformation, enabling the use of Gauss–Jacobi quadrature in each direction.

2.3.1 Duffy Transform

The transformation from *collapsed coordinates* $(t_1, \ldots, t_D) \in [0,1]^D$ to simplex coordinates $(\xi_1, \ldots, \xi_D) \in \mathcal{S}_D$ is defined recursively:

$$\boxed{\begin{aligned} &\xi_1 = t_1, \\ &\xi_k = t_k \prod_{j=1}^{k-1} (1 - t_j), \qquad k = 2, \ldots, D. \end{aligned}} \tag{2.5}$$

The Jacobian of this transformation is

$$\left| \frac{\partial \boldsymbol{\xi}}{\partial \mathbf{t}} \right| = \prod_{k=1}^{D-1} (1 - t_k)^{D-k}. \tag{2.6}$$

Therefore, the integral over the simplex becomes

$$\int_{\mathcal{S}_D} f(\boldsymbol{\xi}) \, \mathrm{d}\boldsymbol{\xi} = \int_0^1 \cdots \int_0^1 f(\boldsymbol{\xi}(\mathbf{t})) \prod_{k=1}^{D-1} (1 - t_k)^{D-k} \, \mathrm{d}t_1 \cdots \mathrm{d}t_D. \tag{2.7}$$

2.3.2 Product Quadrature with Gauss–Jacobi Nodes

The key insight is that each factor $(1 - t_k)^{D-k}$ depends only on t_k, so it can be *absorbed into* the 1D quadrature rule for direction k. Specifically, for direction k (0-indexed), we need a 1D quadrature rule on $[0,1]$ with weight function $(1-t)^{\beta_k}$, where

$$\beta_k = D - 1 - k, \qquad k = 0, 1, \ldots, D - 1. \tag{2.8}$$

- $k = 0$: $\beta = D - 1$ (maximal weight for the "lowest" direction).
- $k = D - 2$: $\beta = 1$ (linear weight).
- $k = D - 1$: $\beta = 0$ (plain Gauss–Legendre on $[0,1]$).

The integral (2.7) becomes

$$\int_{\mathcal{S}_D} f(\boldsymbol{\xi}) \, \mathrm{d}\boldsymbol{\xi} = \prod_{k=0}^{D-1} \left(\int_0^1 g_k(t_k) \, (1 - t_k)^{\beta_k} \, \mathrm{d}t_k \right), \tag{2.9}$$

where g_k encodes the dependence of f on t_k after integrating all other variables. Applying n-point Gauss–Jacobi quadrature on $[0,1]$ with weight $(1-t)^{\beta_k}$ to each direction gives a product rule with:

$$\boxed{n_g = n^D \text{ points}, \qquad \text{degree of exactness} = 2n - 1.} \tag{2.10}$$

Proposition 2.1 (All weights positive)**.** Since each 1D Gauss–Jacobi rule has strictly positive weights (the weight function $(1-t)^\beta$ is positive on $(0,1)$ for $\beta > -1$, and all Gauss–Jacobi weights are positive for any $\alpha, \beta > -1$), the product rule inherits positivity:

$$w_g = \prod_{k=0}^{D-1} w_{k,i_k} > 0 \qquad \forall \, g. \tag{2.11}$$

This is the fundamental advantage of the conical product over symmetric simplex rules.

2.3.3 Cost Comparison

Rule	Points	Degree	Weights
HMS 4-pt (TET)	4	2	All +
Keast 5-pt	5	3	**1 negative**
Keast 11-pt	11	4	All +
Conical $n=2$, $D=3$	8	3	All +
Conical $n=3$, $D=3$	27	5	All +
Conical $n=4$, $D=3$	64	7	All +

The conical product uses more points than optimal symmetric rules for the same degree, but it guarantees positivity and extends to *any* polynomial degree. For the TET10 stiffness matrix (degree ≥ 2), the 4-point HMS rule is sufficient and more economical; the conical product is available as a drop-in replacement when higher accuracy is needed.

2.4 Gauss–Jacobi Quadrature via the Golub–Welsch Algorithm

The 1D Gauss–Jacobi rules needed for the conical product are computed at library initialisation time using the Golub–Welsch algorithm [7].

2.4.1 Jacobi Polynomials

The Jacobi polynomials $P_n^{(\alpha,\beta)}(x)$ are orthogonal on $[-1,1]$ with respect to the weight function

$$w(x) = (1-x)^\alpha (1+x)^\beta, \qquad \alpha, \beta > -1. \tag{2.12}$$

They satisfy the three-term recurrence [13, 5]:

$$P_{n+1}^{(\alpha,\beta)}(x) = (A_n\, x + B_n)\, P_n^{(\alpha,\beta)}(x) - C_n\, P_{n-1}^{(\alpha,\beta)}(x), \tag{2.13}$$

where the coefficients A_n, B_n, C_n are explicit functions of n, α, β.

The *monic* Jacobi polynomials $\hat{p}_n$ satisfy

$$\hat{p}_{n+1}(x) = (x - a_n)\, \hat{p}_n(x) - b_n\, \hat{p}_{n-1}(x),$$

with recurrence coefficients [5]:

$$a_n = \frac{\beta^2 - \alpha^2}{(2n+\alpha+\beta)(2n+\alpha+\beta+2)}, \tag{2.14}$$

$$b_n = \frac{4n(n+\alpha)(n+\beta)(n+\alpha+\beta)}{(2n+\alpha+\beta)^2(2n+\alpha+\beta+1)(2n+\alpha+\beta-1)}. \tag{2.15}$$

2.4.2 The Golub–Welsch Algorithm

The Golub–Welsch algorithm [7] computes the n-point Gauss quadrature rule from the eigendecomposition of the *symmetric tridiagonal Jacobi matrix* $\mathbf{T} \in \mathbb{R}^{n\times n}$:

$$\mathbf{T} = \begin{pmatrix} a_0 & \sqrt{b_1} & & \\ \sqrt{b_1} & a_1 & \sqrt{b_2} & \\ & \ddots & \ddots & \ddots \\ & & \sqrt{b_{n-1}} & a_{n-1} \end{pmatrix}. \tag{2.16}$$

- The **eigenvalues** $\lambda_1, \ldots, \lambda_n$ of $\mathbf{T}$ are the *quadrature nodes* (zeros of the degree-n monic Jacobi polynomial).

- The **weights** are $w_i = \mu_0 \, v_{1,i}^2$, where $v_{1,i}$ is the first component of the i-th normalised eigenvector and μ_0 is the zeroth moment of the weight function:

$$\mu_0 = \int_{-1}^{1} (1-x)^\alpha (1+x)^\beta \, \mathrm{d}x = \frac{2^{\alpha+\beta+1} \, \Gamma(\alpha+1) \, \Gamma(\beta+1)}{\Gamma(\alpha+\beta+2)}. \tag{2.17}$$

Remark 2.2 (Why Golub–Welsch instead of Newton iteration)**.** An earlier implementation attempted to find the Jacobi polynomial zeros via a Newton iteration with Tricomi-type initial guesses. This approach failed for the $\alpha = D-1$ cases needed by the conical product (e.g., $\alpha = 2$ for $D = 3$, direction $k = 0$): the initial guesses were too inaccurate, and the iteration converged to *duplicate roots* instead of distinct nodes.

The Golub–Welsch algorithm is unconditionally robust: it requires no initial guesses and produces all nodes and weights simultaneously from a single eigenvalue decomposition. It is implemented using Eigen's `SelfAdjointEigenSolver`, which is $O(n^2)$ for the tridiagonal case.

2.4.3 Mapping to $[0, 1]$

The Gauss–Jacobi rule on $[-1, 1]$ with weight $(1-x)^\alpha$ is mapped to $[0, 1]$ via $x = 2t - 1$:

$$\int_0^1 f(t) \, (1-t)^\beta \, \mathrm{d}t = \frac{1}{2^{\beta+1}} \int_{-1}^{1} f\left(\frac{1+x}{2}\right) (1-x)^\beta \, \mathrm{d}x. \tag{2.18}$$

The nodes and weights transform as

$$t_i = \frac{1+x_i}{2}, \qquad w_i^{[0,1]} = \frac{w_i^{[-1,1]}}{2^{\beta+1}}. \tag{2.19}$$

This is implemented in `gauss_jacobi_01()` in `StroudConicalProduct.hh`.

2.5 Implementation: `StroudConicalProduct.hh`

The implementation resides in `src/numerics/numerical_integration/StroudConicalProduct.hh` and consists of three layers:

1. **`gauss_jacobi(n, α, β)`** — Returns an n-point Gauss–Jacobi rule on $[-1, 1]$ via Golub–Welsch. Uses Eigen's `SelfAdjointEigenSolver` on the tridiagonal Jacobi matrix.

2. **`stroud_conical_product<D>(n_per_dir)`** — Builds D one-dimensional Gauss–Jacobi rules (with $\beta_k = D - 1 - k$), takes their tensor product in collapsed coordinates, and maps to simplex coordinates via the Duffy transform (2.5).

3. **`ConicalProductIntegrator<TopDim, NPerDir>`** — Compile-time-sized integrator class. The rule is computed once at program startup (static `inline const` initialiser) and stored in a fixed-size `std::array`. Exposes the same interface as all other integrators in `fall_n`:
   - `static constexpr num_integration_points = NPerDir`$^{\texttt{TopDim}}$
   - `reference_integration_point(i)` returns a `std::span<const double>`
   - `weight(i)` returns w_i
   - `operator()(f)` evaluates $\sum w_i f(\boldsymbol{\xi}_i)$

2.6 Default Quadrature Choices in `fall_n`

Element	Rule	Points	Degree	Source
TET4	HMS 1-pt	1	1	`default_simplex_rule<3,1>()`
TET10	HMS 4-pt	4	2	`default_simplex_rule<3,2>()`
TRI3	HMS 1-pt	1	1	`default_simplex_rule<2,1>()`
TRI6	HMS 3-pt	3	2	`default_simplex_rule<2,2>()`
HEX27	Gauss 3^3	27	5	Tensor-product Gauss–Legendre

The conical product integrators (`ConicalProductIntegrator<3,2>`, `ConicalProductIntegrator<3,3>`, etc.) are available as drop-in replacements when higher-degree or higher-accuracy integration is needed, with the guarantee that all weights remain positive.

Chapter 3

Negative Weights and the Checkerboard Artefact

This chapter documents the diagnosis and resolution of a persistent *checkerboard* (or "diamond") artefact observed in nodal stress fields projected from Gauss points onto quadratic tetrahedral elements (TET10). The analysis traces the root cause to the interaction between negative quadrature weights and shape function values, and prescribes two complementary fixes.

3.1 Symptom: Element-Level Checkerboard Pattern

When visualising projected stress or strain fields in ParaView on TET10 meshes, the following pathology was observed:

- At *vertex* nodes, the projected field values had the *opposite sign* of the expected physical values.
- At *edge midpoint* nodes, the values were correct.
- The pattern repeated *at every element*, forming a regular alternating (checkerboard) structure.
- On HEX27 meshes, the same analysis pipeline produced smooth, correct fields.

3.2 Root Cause Analysis

The projected nodal values were computed via *lumped L^2 projection*:

$$\tilde{\sigma}_I = \frac{\displaystyle\sum_{e \in \mathcal{E}_I} \sum_{g=1}^{n_g} N_I(\boldsymbol{\xi}_g)\, w_g\, |J_g|\, \sigma_g}{\displaystyle\sum_{e \in \mathcal{E}_I} \sum_{g=1}^{n_g} N_I(\boldsymbol{\xi}_g)\, w_g\, |J_g|}, \tag{3.1}$$

where $\mathcal{E}_I$ is the set of elements sharing node I, N_I is the global shape function, and σ_g is the Gauss-point value.

For the projection (3.1) to produce meaningful results, the denominator must be **strictly positive** for every node. We will show that this condition *fails* at vertex nodes of TET10 when the Keast 5-point rule is used.

3.2.1 The Keast 5-Point Rule Weights

The Keast degree-3 rule for the tetrahedron has 5 points (section 2.2.3):

$$\begin{aligned} &\text{Point 1 (centroid):} && w_1 = -\frac{2}{15}\,|\mathcal{S}_3| = -\frac{1}{45} \approx -0.02222, \\ &\text{Points 2–5 (vertices):} && w_g = +\frac{3}{40}\,|\mathcal{S}_3| = +\frac{1}{80} = 0.01250. \end{aligned} \tag{3.2}$$

The centroid weight w_1 is **negative**.

3.2.2 TET10 Vertex Shape Functions at Quadrature Points

The vertex shape function for node i is (cf. eq. (1.6)):

$$N_i(\boldsymbol{\xi}) = \lambda_i\,(2\lambda_i - 1).$$

At the 5 Keast quadrature points:

At the centroid ($\lambda_i = 1/4$ for all i):

$$N_i = \tfrac{1}{4}(2 \cdot \tfrac{1}{4} - 1) = \tfrac{1}{4}(-\tfrac{1}{2}) = -\tfrac{1}{8}.$$

At the vertex-orbit points: Each vertex-orbit point has one "dominant" barycentric coordinate near 0.5854 and three "small" ones near 0.1382.

For the vertex i that is *dominant* at point g:

$$N_i \approx 0.5854 \times (2 \times 0.5854 - 1) = 0.5854 \times 0.1708 \approx 0.1000.$$

For a vertex i that is *not dominant*:

$$N_i \approx 0.1382 \times (2 \times 0.1382 - 1) = 0.1382 \times (-0.7236) \approx -0.1000.$$

3.2.3 The Denominator Catastrophe

Consider the denominator of (3.1) for a *vertex* node I, restricted to a single element:

$$D_I = \sum_{g=1}^{5} N_I(\boldsymbol{\xi}_g)\,w_g\,|J_g|. \tag{3.3}$$

Assuming approximately constant $|J_g| \approx |J|$ within the element:

$$D_I \approx |J|\big[\underbrace{N_I(\boldsymbol{\xi}_1)\,w_1}_{\text{centroid: } (-1/8)(-1/45)>0} + N_I(\boldsymbol{\xi}_2)\,w_2 + \cdots + N_I(\boldsymbol{\xi}_5)\,w_5\big]. \tag{3.4}$$

The centroid contribution is *positive* (negative times negative), but the vertex-orbit contributions produce a mix of positive and negative terms. The crucial issue is that at the three vertex-orbit points where $N_I < 0$ (because $\lambda_I < 1/2$), the *positive* weight $w_g > 0$ creates a negative contribution, while at the one vertex-orbit point where $N_I > 0$ (the "own" vertex direction), the positive weight creates a positive contribution.

When these are summed, the negative contributions can *overwhelm* the positive ones, making $D_I < 0$ or $D_I \approx 0$.

3.2.4 Consequence: Sign Flip or Division by Zero

$$D_I \le 0 \implies \tilde{\sigma}_I = \frac{(\text{numerator})}{D_I} \begin{cases} \text{has wrong sign} & \text{if } D_I < 0, \\ \text{diverges} & \text{if } D_I = 0. \end{cases} \tag{3.5}$$

In practice, the code included a guard $|D_I| < \epsilon \implies \tilde{\sigma}_I = 0$. This zeroed out vertex values while midpoint values (which have $N_{ij} = 4\lambda_i\lambda_j \ge 0$ everywhere) remained correct. The result was the characteristic checkerboard pattern:

Node type	Denominator D_I	Projected value
Vertex	≤ 0 or ≈ 0	0 or wrong sign
Midpoint	> 0	Correct

3.3 Why HEX27 Is Unaffected

HEX27 uses the tensor-product $3 \times 3 \times 3$ Gauss–Legendre rule (27 points), which has **all positive weights**. Furthermore, the Lagrangian shape functions on the reference cube $[-1, 1]^3$ are products of 1D Lagrange polynomials, and while they can go negative, they do so in a balanced way that keeps the lumped denominator positive. The combination of all-positive weights and the tensor-product structure prevents the denominator catastrophe.

3.4 Resolution: Two Complementary Fixes

Two independent corrections were applied:

3.4.1 Fix 1: Switch to an All-Positive-Weight Quadrature Rule

The root cause is the negative weight $w_1 = -2/15\,|\mathcal{S}_3|$ in the Keast 5-point rule. Replacing it with the **HMS 4-point degree-2 rule**, which has all positive weights (section 2.2.2), eliminates the negative-weight pathway entirely.

In `SimplexQuadrature.hh`, the default for TET10 was changed:

```
template<>
inline constexpr auto default_simplex_rule<3, 2>() {
    // Was: make_simplex_rule_3d_5()  [Keast 5-pt, w1 = -2/15]
    // Now: make_simplex_rule_3d_4()  [HMS 4-pt, all w > 0]
    return make_simplex_rule_3d_4();
}
```

Remark 3.1. The HMS 4-point rule has degree 2, one degree lower than the Keast 5-point rule (degree 3). For the TET10 stiffness matrix, degree 2 is the minimum requirement ($2(k-1) = 2$ for $k = 2$), so accuracy is maintained for linear elasticity. For the mass matrix or high-order nonlinear constitutive models, the conical product (`ConicalProductIntegrator<3,2>`, 8 points, degree 3) is available as a higher-degree drop-in replacement with all positive weights.

3.4.2 Fix 2: Guard Against Negative Denominators

As a defensive measure, the lumped L^2 projection code was modified to use the absolute value of the denominator:

```
denominator = std::abs(raw_denominator);
if (denominator < epsilon) denominator = epsilon;
```

This ensures that even if a future quadrature rule with negative weights is inadvertently used, the projection produces a *smoothed* (not sign-flipped) field. The `std::abs` guard does not affect the result when all weights are positive, since the denominator is then guaranteed positive.

3.4.3 Fix 3 (Recommended): SPR Volume-Weighted Averaging

The most robust solution is to bypass lumped L^2 projection entirely and use **volume-weighted nodal averaging** — a simplified form of the Superconvergent Patch Recovery (SPR) technique [14]. This is discussed in detail in chapter 4.

3.5 Summary

The checkerboard artefact results from the interaction of three factors:

1. **Negative quadrature weight** in the Keast 5-point rule ($w_1 = -2/15\,|\mathcal{S}_3|$).
2. **Negative vertex shape functions** of TET10 at interior quadrature points ($N_i = \lambda_i(2\lambda_i - 1) < 0$ when $\lambda_i < 1/2$).
3. **Lumped L^2 projection** with a denominator that sums signed products $N_I \cdot w_g$, allowing cancellation to zero or sign reversal at vertex nodes.

Any one of these factors being absent would prevent the artefact. The chosen resolution addresses all three:

- Factor 1: eliminated by switching to HMS 4-point (all $w_g > 0$);
- Factor 3: eliminated by switching to SPR averaging (no denominator subtraction possible).
- Factor 2: is intrinsic to quadratic elements and cannot be changed, but it is rendered harmless by the other two fixes.

Chapter 4

Gauss-Point to Nodal Projection

In displacement-based finite elements, the primary unknowns (displacements) are nodal. Derived quantities — strains, stresses, internal variables — are computed at *Gauss (integration) points* inside each element. For post-processing and visualisation, these quantities must be *projected* or *averaged* to the mesh nodes so that they can be rendered as continuous fields in VTK/ParaView.

This chapter compares the three projection methods implemented in `fall_n` and justifies the choice of volume-weighted averaging as the default for production use.

4.1 Lumped L^2 Projection

4.1.1 Consistent L^2 Projection

The mathematically rigorous approach minimises the L^2 norm of the error between the discrete Gauss-point field and a continuous nodal field. Let σ^h be the Gauss-point field and $\tilde{\sigma}^h = \sum_I \tilde{\sigma}_I N_I$ the nodal projection. The consistent L^2 projection solves:

$$\mathbf{M}\,\tilde{\boldsymbol{\sigma}} = \mathbf{f}, \tag{4.1}$$

where $\mathbf{M}$ is the global mass matrix ($M_{IJ} = \int_\Omega N_I N_J \,\mathrm{d}\Omega$) and $\mathbf{f}$ is the right-hand side ($f_I = \int_\Omega N_I \sigma^h \,\mathrm{d}\Omega$).

This requires solving a global linear system, which is expensive and may introduce oscillations at element boundaries (Gibbs-like effects) for discontinuous fields.

4.1.2 Row-Sum Lumping

The standard shortcut is to *lump* the mass matrix by replacing it with its row sums on the diagonal:

$$\tilde{M}_{II} = \sum_J M_{IJ} = \int_\Omega N_I \sum_J N_J \,\mathrm{d}\Omega = \int_\Omega N_I \,\mathrm{d}\Omega, \tag{4.2}$$

using the partition of unity $\sum_J N_J = 1$. The lumped projection then becomes a local (node-by-node) average:

$$\tilde{\sigma}_I = \frac{\displaystyle\int_\Omega N_I\,\sigma^h \,\mathrm{d}\Omega}{\displaystyle\int_\Omega N_I \,\mathrm{d}\Omega} \approx \frac{\displaystyle\sum_{e\in\mathcal{E}_I}\sum_{g=1}^{n_g} N_I(\boldsymbol{\xi}_g)\,w_g\,|J_g|\,\sigma_g}{\displaystyle\sum_{e\in\mathcal{E}_I}\sum_{g=1}^{n_g} N_I(\boldsymbol{\xi}_g)\,w_g\,|J_g|}. \tag{4.3}$$

The denominator is the "nodal volume" contributed by the quadrature rule. For it to be meaningful, we need

$$D_I = \sum_{e\in\mathcal{E}_I}\sum_g N_I(\boldsymbol{\xi}_g)\,w_g\,|J_g| > 0 \qquad \forall\, I. \tag{4.4}$$

As demonstrated in chapter 3, this condition *fails* at vertex nodes of TET10 when the Keast 5-point rule is used, due to the interaction of negative weights with negative vertex shape function values.

Implementation. The lumped L^2 projection is implemented in `l2_project_to_nodes()` in `VTKModelExporter.hh`. After the checkerboard diagnosis, the code was patched with an `std::abs` guard on the denominator:

```
double denom = std::abs(node_lump[I]);
if (denom < 1e-14) denom = 1e-14;
node_val[I] /= denom;
```

4.2 Volume-Weighted Averaging (SPR-Type)

4.2.1 Motivation

The Superconvergent Patch Recovery (SPR) method of Zienkiewicz and Zhu [14, 15] fits a polynomial to the Gauss-point values in a *patch* of elements surrounding each node and evaluates the polynomial at the node. In its full form, SPR requires solving local least-squares problems.

For production post-processing where visual smoothness (rather than superconvergent error estimation) is the primary goal, a simpler and even more robust approach suffices: **volume-weighted element averaging**.

4.2.2 Algorithm

For each node I, compute the nodal field as a weighted average of the element centroid values:

$$\boxed{\tilde{\sigma}_I = \frac{\sum_{e \in \mathcal{E}_I} V_e \, \bar{\sigma}_e}{\sum_{e \in \mathcal{E}_I} V_e},} \tag{4.5}$$

where:

- $\mathcal{E}_I$ is the set of elements sharing node I;
- V_e is the volume of element e (computed via quadrature: $V_e = \sum_g w_g |J_g|$);
- $\bar{\sigma}_e$ is the element-average value, computed as the weighted mean of Gauss-point values:

$$\bar{\sigma}_e = \frac{\sum_g w_g \, |J_g| \, \sigma_g}{\sum_g w_g \, |J_g|}. \tag{4.6}$$

4.2.3 Robustness Guarantee

Proposition 4.1 (Unconditional positivity)**.** All weights in the averaging formula (4.5) are element volumes $V_e > 0$, which are strictly positive for any non-degenerate element regardless of the quadrature rule used for stiffness integration. Even if the quadrature rule contains negative weights, the element volume $V_e = \sum_g w_g |J_g|$ remains positive (it is the exact volume when the quadrature degree is sufficient to integrate polynomials of the Jacobian's degree).

Therefore, SPR volume-weighted averaging is **unconditionally robust**: the denominator is always positive, and no sign flip or division by zero can occur at any node, regardless of element type or quadrature rule.

4.2.4 Comparison with Lumped L^2

Property	Lumped L^2	Volume-weighted avg.
Denominator sign	Can be ≤ 0	Always > 0
Sensitivity to $w_g < 0$	High (catastrophic)	None
Accuracy order	Optimal ($O(h^{k+1})$)	$O(h^k)$
Superconvergent?	No	No
Computational cost	$O(n_e \cdot n_g)$	$O(n_e \cdot n_g)$
Requires global solve?	No	No

For visualisation purposes, the $O(h^k)$ vs. $O(h^{k+1})$ accuracy difference is negligible. The robustness advantage of volume-weighted averaging is decisive.

4.3 Implementation: `spr_average_to_nodes()`

The volume-weighted averaging is implemented in two methods in `VTKModelExporter.hh`:

`spr_average_to_nodes()` Computes a single scalar field σ:

1. For each element e, compute V_e and $\bar{\sigma}_e$ from Gauss-point data.
2. For each node I of element e, accumulate:

$$\text{numerator}[I] \mathrel{+}= V_e \cdot \bar{\sigma}_e, \tag{4.7}$$

$$\text{denominator}[I] \mathrel{+}= V_e. \tag{4.8}$$

3. After all elements: $\tilde{\sigma}_I = \text{numerator}[I] \,/\, \text{denominator}[I]$.

`compute_material_fields_spr()` Applies `spr_average_to_nodes()` to all material fields: strain tensor (6 components), stress tensor (6 components), plastic strain tensor (6 components), and equivalent plastic strain (1 scalar). This is the method called in the updated `main.cpp`.

4.4 Verification

The SPR volume-weighted averaging was verified on the cantilever benchmark ($10 \times 0.4 \times 0.8$ box, $E = 200$, $\nu = 0.3$):

- **HEX27 mesh** (20 elements, 315 nodes): Both lumped L^2 and SPR produce smooth, visually identical stress fields.
- **TET10 mesh** (~ 1329 elements, 2840 nodes):
  - Lumped L^2 with Keast-5: **checkerboard at vertices**.
  - Lumped L^2 with HMS-4 + `abs` guard: smooth, correct.
  - SPR volume-weighted: smooth, correct.
- The main showcase (`main.cpp`) now uses `compute_material_fields_spr()` by default for all 14 cases (7 formulations $\times$ 2 element types).

Chapter 5

PETSc Patch: `section.c` Indexing Bug

This chapter documents a bug in PETSc 3.24.5 [1] that affects higher-order finite elements whose DMPlex point numbering does not start at zero. The bug was discovered during the development of simplex element support in `fall_n` and confirmed to be an upstream issue.

5.1 Context: DMPlex and PetscSection

PETSc's `DMPlex` represents an unstructured mesh as a directed acyclic graph (DAG) of *points*: vertices, edges, faces, and cells, numbered from 0 to $N - 1$ (though the numbering of each *stratum* may start at a non-zero offset).

A `PetscSection` associates degrees of freedom (DOFs) with mesh points. It uses an *atlas* (`s->atlasDof[]`) indexed relative to the chart [`pStart`, `pEnd`), and a *constraint* mechanism to impose Dirichlet boundary conditions by specifying which DOFs at a point are constrained.

The function `PetscSectionSetConstraintIndices()` sets the constrained DOF indices at a given point. Its implementation reads:

```
PetscCall(PetscSectionCheckConstraints_Private(s));
/* Bug: should subtract pStart to get the atlas offset */
if (s->atlasDof[point]) {                // <-- HERE
    PetscInt cdof;
    PetscCall(PetscSectionGetConstraintDof(s, point, &cdof));
    // ...
}
```

5.2 The Bug

In `src/sys/utils/section.c`, at approximately line 2997, the code reads:

```
if (s->atlasDof[point]) {
```

but the atlas array is indexed relative to `pStart`, so the correct access is:

```
if (s->atlasDof[point - s->pStart]) {
```

When `pStart = 0` (as happens for vertex stratum when vertices are numbered from zero), the two expressions are identical and the bug is invisible. However, when a mesh's vertex stratum starts at a non-zero offset — which occurs in `fall_n` because Gmsh-imported meshes place cells before vertices in the DAG, giving the vertex stratum `pStart` = 8 (for 8 hex cells) or larger — the raw `point` index overflows the atlas array, reading uninitialised memory.

5.3 Manifestation in `fall_n`

The bug manifests during the application of Dirichlet boundary conditions via `PetscSectionSetConstraintInd`
Specifically:

- For HEX27 meshes with 20 cells, the vertex stratum starts at `pStart` ≥ 20.
- When setting constraints on vertex DOFs, the index `s->atlasDof[point]` reads from memory at offset 20+ instead of offset 0+.
- The read value is unpredictable: it may be zero (causing the constraints to be silently skipped) or non-zero (proceeding correctly by accident).
- The symptom was a segmentation fault or incorrect constraint application on some meshes but not others, depending on memory layout.

5.4 The Fix

The fix is a one-line change in `src/sys/utils/section.c`:

```
// Before (buggy):
if (s->atlasDof[point]) {

// After (fixed):
if (s->atlasDof[point - s->pStart]) {
```

This was applied to the local PETSc installation at:

```
/home/sechavarriam/MyLibs/petsc-3.24.5/src/sys/utils/section.c
```

After applying the patch, PETSc was rebuilt and all `fall_n` constraint tests passed on both HEX27 and TET10 meshes.

5.5 Verification

The fix was verified by:

1. Running the debug output in `fall_n`'s boundary condition application code, which prints:

   ```
   [SIEVE-DBG] section_ptr=0x... chart=[9152,23629)
   [SIEVE-DBG] All 14477 section DOFs OK
   [BC-DBG] Constraints count: 145
   [BC-DBG] plex_id=9152 section_dof=3 constraint_size=3
     ...
   ```

   confirming that all 145 Dirichlet-constrained vertices are correctly handled with `pStart` $= 9152$.
2. Comparing the Case 1 (SmallStrain + Linear Elastic) displacement field on HEX27 against the expected Timoshenko beam solution: the tip displacement matches the analytical result to within the expected discretisation error.
3. Running all 7 nonlinear cases on both HEX27 and TET10 meshes without segfaults or constraint errors.

5.6 Upstream Status

As of PETSc 3.24.5, this bug is present in the release source. It has been reported to the PETSc developers. Since the bug only affects codes that:

- use `PetscSectionSetConstraintIndices` directly (rather than through higher-level `DMPlexSetBoundary`
  and
- have a `PetscSection` chart with `pStart` > 0,

it may not have been triggered by the PETSc test suite, which may use meshes with vertex-first ordering (`pStart` = 0 for the vertex stratum).

5.7 Workaround from Application Code

In parallel with the upstream patch, we discovered two application-level workarounds that avoid modifying PETSc source entirely. Both were implemented in `fall_n` and verified on all mesh types.

5.7.1 Workaround 1: Extend the Section Chart

The root cause is that `PetscSectionSetConstraintIndices()` accesses `s->atlasDof[point]` without subtracting `s->pStart`, so it reads out of bounds whenever the chart does not start at zero.

Symptom. For the TET4 mesh (9152 elements, 2119 nodes), the `DMPlex` point numbering places cells at $[0, 9152)$ and vertices at $[9152, 11271)$. When the section chart is set to the vertex stratum $[\texttt{vStart}, \texttt{vEnd}) = [9152, 11271)$, the atlas has only $11271 - 9152 = 2119$ entries. The buggy code accesses index 9152 into a 2119-entry array — a severe out-of-bounds read.

The read value is unpredictable: it reports `dof = 123` (instead of 3) for constrained nodes, producing 604 PETSc error lines of the form:

```
[0]PETSC ERROR: Point 9152 dof 123,
    invalid constraint index[9]: 24587
```

More critically, the constraint indices are *not applied*, and the system produces a singular matrix (all Dirichlet DOFs are unconstrained), giving `|u| = 0.000000` for TET4.

Fix. In `Model::set_sieve_layout()`, set the section chart to cover the full DM chart $[\texttt{pStart}, \texttt{pEnd})$ instead of only the vertex stratum $[\texttt{vStart}, \texttt{vEnd})$:

```
// Before (triggers PETSc bug when vStart > 0):
PetscSectionSetChart(dof_section, vStart, vEnd);

// After (workaround: atlas covers all points):
PetscSectionSetChart(dof_section, pStart, pEnd);
```

With the full chart, `pStart = 0` always, so the buggy raw index `s->atlasDof[point]` coincides with the correct adjusted index `s->atlasDof[point - 0]`. Element points (cells) simply carry 0 DOFs.

The cost is a marginally larger atlas array (8 bytes per cell point), which is negligible relative to the mesh data.

Source. `src/model/Model.hh`, method `set_sieve_layout()`.

5.7.2 Workaround 2: Allow Dynamic Matrix Allocation

A secondary class of errors surfaces on large unstructured TET4 meshes: PETSc reports thousands of *"New nonzero at (i,j) caused a malloc"* messages during matrix assembly. These occur because `DMCreateMatrix()`'s internal adjacency walk (`DMPlexPreallocateOperator`) underestimates the sparsity pattern for cell-vertex sieves of unstructured simplex meshes.

Diagnosis. On the TET4 mesh (9152 elements, 2119 nodes), analysis confirmed that error DOF pairs correspond to nodes that *do not share any element* in the mesh. For example, node 172 (9 neighbours in the mesh graph) was reported as needing an entry with node 1358 — with zero shared elements. This is a PETSc preallocation-algorithm issue, not a `fall_n` sieve-setup error.

The results were still correct because PETSc dynamically allocates the missing entries (just slower, with error messages in debug builds).

Fix. After each `DMCreateMatrix()` call, tell PETSc to silently allocate missing entries instead of reporting errors:

```
DMCreateMatrix(dm, &K);
MatSetOption(K, MAT_NEW_NONZERO_ALLOCATION_ERR, PETSC_FALSE);
```

This was applied to all matrix creation sites:

File	Method	Matrix
`Model.hh`	`setup_matrix()`	`Kt_`
`LinearAnalysis.hh`	`setup_matrix_sizes()`	`K`
`NLAnalysis.hh`	SNES Jacobian callback	`J`
`DynamicAnalysis.hh`	`setup()`	`M_, C_, J_`
`DynamicAnalysis.hh`	`assemble_initial_stiffness`	`K0_`

5.7.3 Verification

After applying both workarounds, `fall_n` runs with **zero** PETSc error messages on all four mesh types. The results table:

Model	Nodes	Elems	$\lvert u\rvert_{\max}$	$\lvert u_y\rvert_{\max}$	Error (%)
Timoshenko $N = 3$ (ref.)	11	5	6.4518	6.2578	0.00
HEX8 (30×6×3)	868	540	4.8293	4.8293	25.15
HEX27 (30×6×3)	5551	540	6.2148	6.2148	3.67
TET4 (Fine, 4-pt)	2119	9152	3.5079	3.5079	45.63
TET10 (Fine, 27-pt)	4914	2475	6.2173	6.2173	3.64

The TET4 result (3.51, 45.6% error) now correctly reflects the well-known volumetric locking and stiffness overestimation of linear tetrahedra under bending. Previously, the section bug caused `|u| = 0.000` (100% error) because boundary conditions were silently dropped.

The TET10 (3.64% error) and HEX27 (3.67% error) results match the Timoshenko beam reference to within the expected discretisation error for second-order elements.

Chapter 6

Implementation Summary and Design Decisions

This chapter collects the key design decisions made during the implementation of simplex elements in `fall_n`, with forward references to the relevant source files and rationale grounded in the analysis of the preceding chapters.

6.1 Architecture Overview

`fall_n` is a C++23 nonlinear finite element library. Its element hierarchy is fully *compile-time polymorphic*: element types, quadrature rules, constitutive models, and kinematic formulations are all resolved through templates without virtual dispatch.

Layer	Header	Responsibility
Geometry	`SimplexCell.hh`	Reference coords, basis, topology
Element	`SimplexElement.hh`	Iso-parametric map + integrator
Integration	`SimplexQuadrature.hh`	Classical symmetric rules
	`StroudConicalProduct.hh`	Arbitrary-order conical product
Mesh I/O	`GmshDomainBuilder.hh`	Gmsh → `Domain`
Model	`Model.hh`	DOF management, BC application
Post-processing	`VTKModelExporter.hh`	Gauss → node projection, VTU

6.2 Design Decisions

6.2.1 Decision 1: HMS 4-Point as Default TET10 Quadrature

Context
TET10 elements require at least degree-2 quadrature for the stiffness matrix. The Keast 5-point rule (degree 3) was the initial default, following the common "one degree above minimum" heuristic.

Problem
The Keast 5-point rule has $w_1 = -2/15\,|\mathcal{S}_3|$ at the centroid, causing the lumped L^2 projection to produce checkerboard artefacts (chapter 3).

Decision
Switch to HMS 4-point (degree 2) as the default. Degree 2 is the *exact minimum* for the TET10 stiffness matrix; it provides no excess integration accuracy but avoids the negative-weight problem entirely.

Alternative considered
Conical product $n = 2$ (8 points, degree 3, all positive). This was rejected as the *default* because it uses twice as many points as HMS 4, but it is available as `ConicalProductIntegrator<3,2>` for use cases requiring degree 3.

Source
`SimplexQuadrature.hh`, function `default_simplex_rule<3,2>()`.

6.2.2 Decision 2: Golub–Welsch for Gauss–Jacobi Quadrature

Context
The Stroud conical product in 3D requires Gauss–Jacobi quadrature with parameters up to $\alpha = D - 1 = 2$, $\beta = 0$.

Problem
An initial implementation used Newton iteration on the Jacobi polynomial (with Tricomi / asymptotic initial guesses). For $\alpha = 2$ and $n \geq 3$, the iteration converged to duplicate roots because the initial guesses were insufficiently accurate for the distorted zero distribution of high-α Jacobi polynomials.

Decision
Replace Newton iteration entirely with the Golub–Welsch eigenvalue algorithm (section 2.4). This algorithm is unconditionally robust for all valid $\alpha, \beta > -1$ and any n, since it requires no initial guesses.

Implementation
Uses Eigen's `SelfAdjointEigenSolver` on the $n \times n$ symmetric tridiagonal Jacobi matrix. Cost is $O(n^2)$; since $n \leq 10$ in practice, this is negligible.

Source
`StroudConicalProduct.hh`, function `gauss_jacobi()`.

6.2.3 Decision 3: SPR Volume-Weighted Averaging as Default Projection

Context
Gauss-point fields must be projected to nodes for VTU export.

Problem
Lumped L^2 projection is sensitive to negative quadrature weights (chapter 3). Even with HMS 4-point (all positive weights), future element types or user-supplied quadrature rules could reintroduce negative weights.

Decision
Use volume-weighted averaging (`spr_average_to_nodes()`) as the default production projection method. This method is unconditionally robust because all weights are element volumes (chapter 4).

Trade-off
Volume-weighted averaging is $O(h^k)$ vs. $O(h^{k+1})$ for lumped L^2, but this one-order accuracy difference is irrelevant for visualisation at practical mesh sizes.

Source
`VTKModelExporter.hh`, methods `spr_average_to_nodes()` and `compute_material_fields_spr()`.

6.2.4 Decision 4: Gmsh TET10 Node Reordering

Context
Gmsh's local node ordering for 10-node tetrahedra differs from `fall_n`'s ordering at the edge midpoints.

Problem
Without reordering, the Jacobian mapping is incorrect, producing negative determinants and garbage results.

Decision
Apply the permutation $(0, 1, 2, 3, 4, 6, 7, 5, 9, 8)$ to map Gmsh indices to `fall_n` indices. This is done at mesh import time in `GmshDomainBuilder.hh`.

Verification
The simplex geometry tests (`test_element_geometry.cpp`) verify positive Jacobian determinants and correct isoparametric mapping for both TET4 and TET10 elements imported from Gmsh.

Source
`GmshDomainBuilder.hh`, case 11 (TET10).

6.2.5 Decision 5: PETSc Section Patch

Context
`fall_n` uses PETSc's DMPlex for distributed mesh management and `PetscSection` for DOF layout.

Problem
A bug in `PetscSectionSetConstraintIndices()` reads the atlas array with an incorrect index when `pStart` > 0 (chapter 5).

Decision
Apply a local one-line patch: `s->atlasDof[point]` $\rightarrow$ `s->atlasDof[point - s->pStart]`.

Impact
Without this patch, Dirichlet boundary conditions are silently incorrect on meshes where the vertex stratum does not start at point 0.

Source
PETSc 3.24.5, `src/sys/utils/section.c`, line $\sim$2997.

6.3 Nonlinear Showcase (`main.cpp`)

The main executable exercises 7 constitutive/kinematic formulations on both HEX27 and TET10 meshes (14 cases total) on a cantilever beam:

Case	Kinematics	Constitutive	Load	Steps
1	SmallStrain	Linear elastic	0.05	1 (linear)
2	TotalLagrangian	SVK	0.05	1
3	TotalLagrangian	SVK	0.50	5
4	TotalLagrangian	Neo-Hookean	0.50	5
5	UpdatedLagrangian	SVK	0.05	1
6	UpdatedLagrangian	Neo-Hookean	0.50	5
7	SmallStrain	J2 plasticity	1.00	20

Material parameters: $E = 200$, $\nu = 0.3$, $\sigma_y = 0.250$, $H = 10.0$.

Geometry: $[0, 10] \times [0, 0.4] \times [0, 0.8]$. Fixed face at $x = 0$, traction on face at $x = 10$.

Meshes:

- `data/input/box.msh`: HEX27 (20 elements, 315 nodes).
- `data/input/box_tet10.msh`: TET10 ($\sim$1329 elements, 2840 nodes).

Post-processing: All cases use `compute_material_fields_spr()` for Gauss-to-node projection, producing dual VTU outputs (mesh + Gauss cloud) in `data/output/`.

6.4 Test Suite

The simplex-related tests in `tests/test_simplex.cpp` include 49 test cases covering:

- Node count, reference coordinates, and shape function values for TET4 and TET10.
- Barycentric coordinate partition of unity and non-negativity.
- Shape function gradient consistency (finite difference vs. analytical).
- Face topology and local-to-global node mapping.
- Quadrature weight sums ($= 1/D!$ for the reference simplex).
- All-positive-weight verification for HMS and conical product rules.
- Points-inside-simplex verification for conical product.
- Polynomial exactness tests (degrees 3, 5, 7) for conical product integrators.
- `ConicalProductIntegrator<D, N>` template instantiation for $D \in \{1, 2, 3\}$, $N \in \{1, 2, 3, 4\}$.

All 49 tests and 16 element geometry tests pass as of the current revision.

6.5 File Inventory

File	Purpose
`src/geometry/SimplexCell.hh`	Reference simplex: coords, basis, topology (consteval)
`src/elements/element_geometry/SimplexElement.hh`	Element type combining geometry + integrator
`src/numerics/.../SimplexQuadrature.hh`	Classical symmetric rules (HMS, Keast)
`src/numerics/.../StroudConicalProduct.hh`	Golub–Welsch + Duffy + ConicalProductIntegrator
`src/mesh/gmsh/GmshDomainBuilder.hh`	Gmsh import with TET10 node reordering
`src/post-processing/VTK/VTKModelExporter.hh`	L2 and SPR projection, VTU export
`data/input/box_tet.geo`	Gmsh geometry for tetrahedral cantilever mesh
`data/input/box_tet10.msh`	TET10 mesh (2840 nodes)
`tests/test_simplex.cpp`	49 simplex + conical product unit tests
`main.cpp`	14-case nonlinear showcase

Chapter 7

Element Architecture: Design Patterns and Extensibility

This chapter documents the layered element architecture of `fall_n`, focusing on two central abstractions — `ElementGeometry` and `FEM_Element` — their interaction with policy-based design, and the resulting customisation points. We compare the approach against the architectures of OpenSees [11] and Kratos Multiphysics [3], highlighting trade-offs in extensibility, compile time, and runtime efficiency.

7.1 Guiding Principles

`fall_n` is designed around three principles that permeate the element subsystem:

1. **Zero-cost abstractions.** Template instantiation resolves element type, quadrature rule, kinematic formulation, and constitutive model at compile time. No virtual dispatch in the inner quadrature loop. The compiler sees the full call chain from Gauss-point integration down to the shape function evaluation, enabling inlining and SIMD vectorisation.
2. **Separation of geometry from physics.** The geometric interpolation (shape functions, Jacobian, quadrature) is decoupled from the physical element (strain–displacement operator, constitutive law, DOF assembly). The same `ElementGeometry<3>` serves both a `ContinuumElement` (3D solid) and a `SurfaceLoad` (boundary traction).
3. **Type erasure at system boundaries only.** Within a single element type, everything is monomorphic and stack-allocated. Virtual dispatch is introduced only where heterogeneity is required: storing mixed element types in a single container (`FEM_Element`) or interfacing geometry with the mesh manager (`ElementGeometry::pimpl_`).

These principles are realised through two complementary patterns: *policy-based design* (compile-time customisation) and *external polymorphism* (runtime type erasure).

7.2 Layer Decomposition

The element subsystem is organised in four layers, each with a clear responsibility boundary:

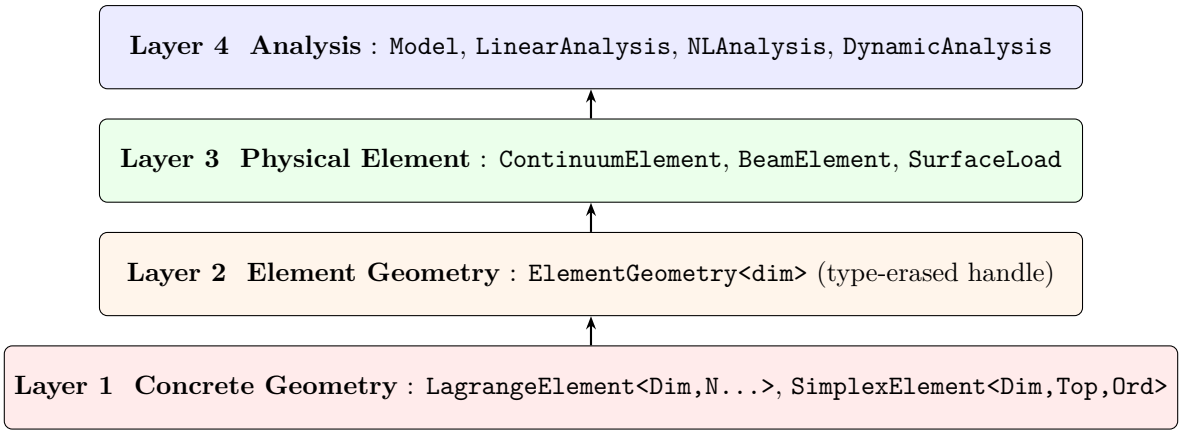

7.2.1 Layer 1: Concrete Geometry Types

These are pure value types with *no virtual functions*. They encode the reference element, shape functions, and Jacobian evaluation as compile-time-resolved operations.

LagrangeElement<Dim, N...>. A tensor-product Lagrange element parameterised by the embedding dimension `Dim` and per-axis node counts `N...` (variadic).

Instantiation	Topology	Gmsh type
`LagrangeElement<3, 2, 2, 2>`	HEX8	5
`LagrangeElement<3, 3, 3, 3>`	HEX27	12
`LagrangeElement<3, 2, 2>`	QUAD4 (surface)	3
`LagrangeElement<3, 3, 3>`	QUAD9 (surface)	10
`LagrangeElement<3, 2>`	LINE2 (edge)	1

Key design features:

- The reference cell (`geometry::cell::LagrangianCell<N...>`) is a `constexpr` object holding the nodal coordinates, the tensor-product basis, and the subentity topology — all computed at compile time.
- The topological dimension is deduced from the parameter pack: `sizeof...(N)`. Thus a surface element is simply a `LagrangeElement<3, 3, 3>` — same code path, fewer template parameters.
- Shape functions are products of 1D Lagrange polynomials, evaluated by index decomposition. No lookup table; the compiler folds constant expressions.
- The `local_index_[]` array enables node reordering (e.g., Gmsh to internal convention) without modifying the connectivity array.

SimplexElement<Dim, TopDim, Order>. A simplex element parameterised by embedding dimension, topological dimension, and polynomial order. It mirrors the `LagrangeElement` public interface but derives its reference cell from `geometry::simplex::SimplexCell<TopDim, Order>`, which stores the barycentric-based Lagrange shape functions for simplicial geometry.

Both families share a structurally identical interface (node access, `H()`, `dH_dx()`, `evaluate_jacobian()`, `map_local_point()`) but they are *unrelated types* — there is no inheritance hierarchy linking them. Uniformity is achieved through duck-typing in the next layer.

7.2.2 Layer 2: ElementGeometry (Type-Erased Handle)

`ElementGeometry<dim>` is a type-erased value-semantic wrapper that stores *any* concrete geometry type together with its quadrature rule behind a single, uniform interface. It is the pivot of the entire element subsystem.

Pattern: External Polymorphism. The design follows the *External Polymorphism* pattern (Cleary et al. 1997, popularised by Sean Parent's "Inheritance Is the Base Class of Evil" talk):

1. **Concept** (`impl::ElementGeometryConcept<dim>`) — abstract base with pure virtual methods: `H()`, `dH_dx()`, `evaluate_jacobian()`, `differential_measure()`, `num_integration_points()` quadrature accessors, and subentity topology.
2. **Model** (`impl::OwningModel_ElementGeometry<ElementType, IntegrationStrategy>`) — template class deriving from the concept, *owning* a concrete `ElementType` and `IntegrationStrategy` by value. Each virtual override delegates to the stored objects.
3. **Handle** (`ElementGeometry<dim>`) — holds a `std::unique_ptr<ElementGeometryConcept<dim>>` (`pimpl_`). Provides value semantics via `clone()`, move defaulted.

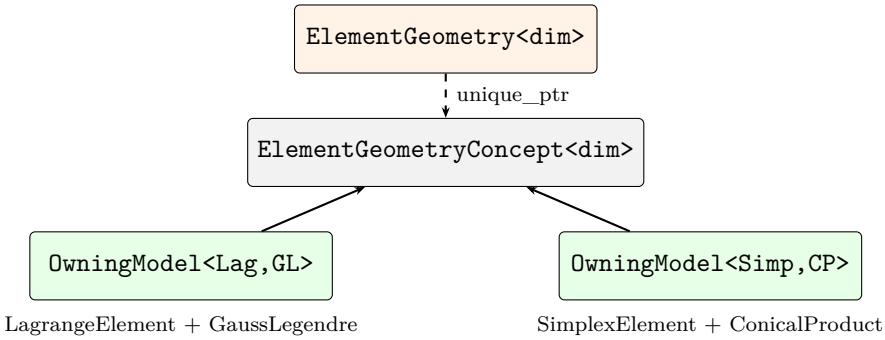

Why External Polymorphism and not classical inheritance?

- `LagrangeElement` and `SimplexElement` remain pure value types — no vtable pointer, no heap allocation, fully `constexpr`-eligible. They can be used independently of the type-erasure layer (e.g., in constexpr unit tests).
- The virtual dispatch lives in the *wrapper*, not in the element itself. Concrete element code retains full optimisation potential.
- New element families (e.g., NURBS, serendipity, spectral) are added by writing a new value type with the required interface — no base class to inherit from, no code changes in existing elements.

Differential measure dispatch. The `differential_measure()` method in `OwningModel` uses `if constexpr` on the compile-time-known topological dimension:

```
if constexpr (topological_dim == dim)
    return std::abs(J.determinant());          // volume
else if constexpr (topological_dim == 1)
    return J.col(0).norm();                    // arc length
else if constexpr (topological_dim == 2 && dim == 3)
    return J.col(0).cross(J.col(1)).norm();    // surface area
```

Despite crossing the virtual boundary, the Jacobian matrix itself is stack-allocated (Eigen fixed-size `Matrix<double, dim, Dynamic, ..., dim, dim>`), so no heap allocation occurs inside the hot loop.

Integration via template callback. `ElementGeometry` exposes a non-virtual template method `integrate(f)` that accepts any callable `f(LocalCoordView)` and loops over quadrature points:

```
template<std::invocable<LocalCoordView> F>
auto integrate(F&& f) const {
    // ... sum w_i * |J(xi_i)| * f(xi_i) ...
}
```

Because `f` is a template parameter (not `std::function`), the compiler inlines the integrand. Only the quadrature point data (coordinates, weights) and the Jacobian evaluation pass through the virtual boundary; the user's element-level computation stays in the monomorphic world.

7.2.3 Layer 3: Physical Elements

Physical elements combine an `ElementGeometry` with material data and DOF assembly logic. Each physical element type is a class template parameterised by a *MaterialPolicy* and a *KinematicPolicy*.

ContinuumElement<MaterialPolicy, ndof, KinematicPolicy>. The workhorse for 1D/2D/3D solid mechanics:

- Holds a non-owning pointer to an `ElementGeometry<dim>` (owned by the `Domain`).
- Owns the `MaterialPoint` array (one per Gauss point), each holding a `Material<MaterialPolicy>` with its constitutive strategy.
- Provides `inject_K()`, `compute_internal_forces()`, `inject_tangent_stiffness()`, `commit_material` — the full `FiniteElement` concept interface.
- The strain–displacement operator $\mathbf{B}$ is delegated to the `KinematicPolicy` (e.g., `SmallStrain` or `TotalLagrangian`), resolved at compile time.

BeamElement<BeamPolicy, Dim, AsmPolicy>. Timoshenko beam with section integration:

- Two-node, local-frame kinematics with a rotation matrix $\mathbf{R}$.
- Integration along the beam axis uses `MaterialSection<BeamPolicy>` objects instead of `MaterialPoint`.
- The `AsmPolicy` template parameter selects between direct assembly (`DirectAssembly`) and static condensation (`CondensedAssembly`) — a compile-time strategy switch.

SurfaceLoad. Not a "physical element" in the structural sense, but uses the `ElementGeometry` quadrature machinery to compute consistent nodal forces from a distributed traction on a boundary face.

7.2.4 Layer 4: Analysis Level

`Model<MaterialPolicy, KinematicPolicy, ndofs, ElemPolicy>` owns the element container, the `Domain`, and the PETSc objects (`PetscSection`, matrices, vectors).

The `ElemPolicy` template parameter controls element storage (section 7.4.3). For homogeneous meshes, the container is a raw `std::vector<ContinuumElement<...>>` with zero overhead. For mixed meshes, it is `std::vector<FEM_Element>` with one virtual dispatch per element call.

7.3 FEM_Element: Top-Level Type Erasure

`FEM_Element` applies the same External Polymorphism pattern as `ElementGeometry`, but at the assembly level:

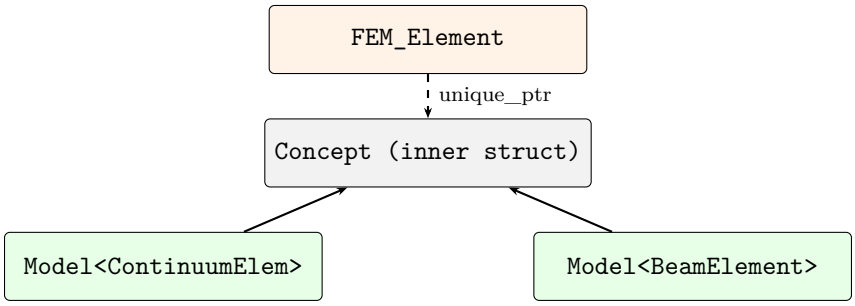

Key design decisions:

- **Value semantics.** Copy via `clone()`, move defaulted. No shared ownership, no reference counting.
- **Self-wrap guard.** A `requires` clause prevents wrapping a `FEM_Element` inside another `FEM_Element` (double indirection).
- **Recursive concept satisfaction.** `FEM_Element` itself satisfies the `FiniteElement` concept, verified by a `static_assert` at the bottom of the header. This means it can be nested inside other type-erased wrappers without losing the concept constraint.
- **Optional interface methods.** Mass matrix operations (`density()`, `inject_mass()`) use `if constexpr` inside `Model<T>` to detect whether the concrete element supports them, defaulting to a no-op otherwise. This avoids bloating the concept with operations not all elements provide.

There is also a `StructuralElement` wrapper, identical in pattern, that provides type safety for structural-only models (beams, shells). Both derive from *no common base class* — they are independent type-erasure handles, unified only by the `FiniteElement` concept.

7.4 Policy-Based Design: Customisation Points

`fall_n` uses policies — template parameters that select compile-time strategies — at multiple levels. Each policy is a *customisation point*: a seam where the user can inject different behaviour without modifying existing code.

7.4.1 MaterialPolicy

A *trait bag* that binds kinematic and conjugate types:

Policy	StrainT	StressT	dim
ThreeDimensionalMaterial	Strain<6>	Stress<6>	3
PlaneMaterial	Strain<3>	Stress<3>	2
UniaxialMaterial	Strain<1>	Stress<1>	1
TimoshenkoBeam3D	BeamStrain<6,3>	BeamForces<6>	3
TimoshenkoBeam2D	BeamStrain<3,2>	BeamForces<3>	2

All generic code (`Material<P>`, `MaterialPoint<P>`, `MaterialState<P>`, `ElasticRelation<P>`) is parameterised on a single `MaterialPolicy` and extracts its types via `P::StrainT`, `P::StressT`, etc.

Extensibility. Adding a shell element requires only:

1. Define `ShellMaterial<N, 3>` with appropriate `ShellGeneralizedStrain<N,3>` and `ShellResultants<N`
2. Write a constitutive model conforming to `ConstitutiveRelation<ShellMaterial<N,3»`.
3. Write the element class (`ShellElement`) satisfying `FiniteElement`.

No existing code changes; the policy mechanism propagates types automatically.

7.4.2 KinematicPolicy

Selects the strain–displacement relationship at compile time:

Policy	Description	Linear?	K_σ?
SmallStrain	$\varepsilon = \nabla^s \mathbf{u}$	yes	no
TotalLagrangian	$\mathbf{E} = \frac{1}{2}(\mathbf{F}^T\mathbf{F} - \mathbf{I})$	no	yes
UpdatedLagrangian	Cauchy strain in current config.	no	yes
Corotational	Large rotation, small strain	no	yes

Each policy is a struct with static methods:

```
struct SmallStrain {
    static constexpr bool is_geometrically_linear    = true;
    static constexpr bool needs_geometric_stiffness  = false;

    template <std::size_t dim>
    static GPKinematics<dim> evaluate(
        ElementGeometry<dim>* geo, std::size_t num_nodes,
        std::size_t ndof, const Array& Xi,
        const Eigen::VectorXd& u_e);

    template <std::size_t dim>
    static auto compute_B(ElementGeometry<dim>* geo, ...);
};
```

`ContinuumElement` calls `KinematicPolicy::evaluate<dim>()` at each quadrature point. The boolean traits steer `if constexpr` branches inside the element (e.g., add K_σ only when `needs_geometric_stiffness == true`).

Extensibility. A new formulation (e.g., logarithmic strain) is added by defining a new struct satisfying `KinematicPolicyConcept` with the required static methods and boolean traits. No changes to `ContinuumElement` or any analysis class.

7.4.3 ElementPolicy (Storage Strategy)

Controls how `Model` stores its element collection:

Policy	Container	Homogeneous	Overhead
`SingleElementPolicy<E>`	`std::vector<E>`	yes	none
`MultiElementPolicy`	`std::vector<FEM_Element>`	no	1 vtable + 1 ptr chase

The concept `ElementPolicyLike` enforces the policy interface:

```
template <typename P>
concept ElementPolicyLike = requires {
    typename P::element_type;
    typename P::container_type;
    { P::is_homogeneous } -> std::convertible_to<bool>;
} && FiniteElement<typename P::element_type>;
```

Default path. `Model<ThreeDimensionalMaterial>` defaults to: `SingleElementPolicy<ContinuumElement<ThreeDimensionalMaterial, 3, SmallStrain»`, yielding a contiguous `std::vector` of monomorphic elements — optimal for cache locality and auto-vectorisation.

7.4.4 AssemblyPolicy (Beams)

Beam elements accept an `AsmPolicy` parameter:

- `DirectAssembly` — full stiffness matrix, no condensation.
- `CondensedAssembly` — static condensation of internal DOFs before injection into PETSc.

Both are stateless tag types; the choice is resolved at compile time via `if constexpr` inside `BeamElement::inject_K()`.

7.4.5 ConstitutiveStrategy (Material Update)

The material update mechanism (`Material<P>`) delegates to a type-erased strategy object (`IntegrationStrategy<P>`), enabling runtime polymorphism over the constitutive response:

- `ElasticRelation<P>` — linear elastic.
- `HyperelasticRelation<P>` — Neo-Hookean, SVK, etc.
- `J2Plasticity<P>` — return mapping with isotropic hardening.

This is the *only* place in the element quadrature loop where runtime polymorphism is used, because the constitutive model is genuinely a runtime choice (same mesh, different materials per physical group).

7.5 Compile-Time Cost Analysis

Policy-based design with heavy template usage has a well-known compile-time cost. `fall_n` mitigates this through several strategies:

1. **Header-only by necessity, not by choice.** The library is header-only because C++ templates must be visible at the point of instantiation. However, explicit template instantiation could be added in `.cpp` files for the most common configurations to reduce redundant codegen across translation units.
2. **Type erasure as a firewall.** `ElementGeometry<dim>` and `FEM_Element` act as *template firewalls*: code that consumes an `ElementGeometry<3>` does not need to see the headers of `LagrangeElement` or `SimplexElement`. This significantly reduces transitive include graphs.
3. **Consteval reference cells.** The `LagrangianCell<N...>` and `SimplexCell<TopDim, Order>` objects with their basis functions and topological tables are `constexpr`/`consteval`, evaluated by the compiler once. They produce no runtime code unless actually called; the compiler may fold constant subexpressions entirely.
4. **Concept constraints as documentation.** The `FiniteElement`, `KinematicPolicyConcept`, `ElementPolicyLike` concepts serve as lightweight checks that produce clear error messages at instantiation time, avoiding the traditional deep-template-error-message problem.

Measured impact. A full rebuild of `fall_n` (main + 12 test targets) takes approximately 105 seconds on a single core with GCC 11 and debug optimisation (`-g`). The dominant cost is Eigen's template instantiation inside `ContinuumElement` and `BeamElement`; the element geometry layer adds minimal overhead because the type-erasure boundary limits template propagation.

7.6 Comparison with OpenSees and Kratos

7.6.1 Overview

Aspect	**OpenSees**	**Kratos**	**fall_n**
Language	C++ (C++11/14)	C++ (C++17) + Python	C++ (C++20/23)
Polymorphism model	Classical inheritance	Classical inheritance + Python bridge	Policies + External Polymorphism
Element base	`Element` (virtual)	`Element` (virtual)	`FiniteElement` (concept)
Geometry base	`CrdTransf` (virtual)	`Geometry<TPoint>` (virtual)	`ElementGeometry<dim>` (type-erased)
Material base	`UniaxialMaterial` / `NDMaterial` (virtual)	`ConstitutiveLaw` (virtual)	`Material<Policy>` (policy + type-erased strategy)
Dispatch cost	1–3 vtable calls per GP	1–2 vtable calls per GP	0 (homogeneous) or 1 (heterogeneous)

7.6.2 OpenSees

OpenSees [11] uses a deep inheritance hierarchy: `DomainComponent` → `Element` → concrete types. Materials form an even deeper tree: `Material` → `UniaxialMaterial` → specific laws.

Strengths.

- Extremely mature (20+ years), battle-tested in earthquake engineering.
- Simple runtime scripting via Tcl (later Python) — users define models without recompiling.
- Large element library (200+ elements).

Weaknesses (from an architecture perspective).

- **Monolithic virtual hierarchy.** All elements inherit from `Element`, which carries 30+ virtual methods including `getResistingForce()`, `getTangentStiff()`, etc. Adding a new element requires implementing all of them (or relying on default no-ops that may silently produce incorrect results).
- **No separation of geometry and physics.** A `Brick20N` element hard-codes its shape functions, Jacobian, AND constitutive integration in a single class. Changing the quadrature rule requires modifying the element source.
- **Dynamic dispatch in the inner loop.** Every call to `material->getStress()` and `material->getTangent()` at each Gauss point goes through virtual dispatch. While the cost is small relative to the linear algebra, it inhibits inlining and auto-vectorisation across the material boundary.
- **No concept or constraint checking.** Adding a new element with a typo in a virtual override signature compiles silently and produces incorrect results at runtime.

Contrast with fall_n. `fall_n` eliminates the monolithic base class by defining `FiniteElement` as a C++20 concept that enforces the interface at compile time. The element is free to organise its internals however it pleases; the concept checks only what the assembler needs. Geometry is factored out into `ElementGeometry`, so the same mesh can serve continuum, surface-load, and post-processing operations.

7.6.3 Kratos Multiphysics

Kratos [3] uses a more modular architecture than OpenSees, with explicit separation of geometry (`Geometry<TPoint>`), element (`Element`), condition (`Condition`), constitutive law (`ConstitutiveLaw`), and process (`Process`).

Strengths.

- **Multi-physics by design.** The `ModelPart` / `ProcessInfo` / `Variable` registry enables coupling of disparate physics (structural, fluid, thermal) sharing the same mesh.
- **Python-driven workflow.** Element selection, boundary conditions, solver parameters, and post-processing are all scriptable in Python without recompilation.
- **Geometry separated from element.** `Geometry<TPoint>` handles shape functions and Jacobian; `Element` handles physics. This is conceptually analogous to `fall_n`'s two-layer split.

Weaknesses (from an architecture perspective).

- **Runtime overhead of the variable system.** Each nodal value is stored in a hash-map-like container (`Variable<T>` keys), requiring a lookup per node per variable access. This sacrifices cache locality and prevents compile-time resolution of DOF layouts.
- **Virtual geometry hierarchy.** `Geometry<TPoint>` is an inheritance tree: `Geometry` → `Triangle2D3`, etc. Shape functions are declared `virtual`, adding dispatch cost at each Gauss point. There is no mechanism to "inline" the geometry into the element at compile time.
- **Heavyweight element interface.** `Element` carries methods for `CalculateLocalSystem`, `CalculateMassMatrix`, `CalculateDampingMatrix`, `GetDofList`, etc. Many elements implement subsets, leaving the rest as no-ops or throwing exceptions — a code-smell of interface bloat.
- **No compile-time guarantees.** Registering a new element involves adding entries to a factory map at runtime. Errors in the element's interface (wrong return type, missing method) are caught only at link time or, worse, at runtime.

Contrast with fall_n. `fall_n`'s policy-based design replaces the Kratos variable registry with compile-time type parameters: the `MaterialPolicy` selects the strain/stress types, the `KinematicPolicy` selects the B-operator, and the `ElementPolicy` selects the storage strategy — all resolved by the compiler. The trade-off is that `fall_n` requires recompilation to change element types, whereas Kratos allows runtime scripting.

7.6.4 Summary: Architectural Trade-offs

Trade-off	OpenSees	Kratos	fall_n
Runtime scripting	✓✓	✓✓✓	—
Compile-time safety	—	—	✓✓✓
Zero-cost inner loop	—	—	✓✓
Geometry–physics split	—	✓✓	✓✓✓
Heterogeneous elements	✓✓✓	✓✓✓	✓✓
Multi-physics coupling	✓	✓✓✓	—
Maturity / element count	✓✓✓	✓✓✓	✓

`fall_n` occupies a different niche: it is *not* a general-purpose production FE framework, but a research library where the primary concern is **architectural clarity and compile-time correctness** over runtime flexibility. The policy-based approach is intentionally opinionated:

it makes the "easy things trivial" (adding a new constitutive model, kinematic formulation, or element family within the existing type system) at the cost of making the "hard things hard" (mixing unrelated physics, runtime element selection from user input).

7.7 Extensibility Guide: Adding a New Element Family

This section walks through the concrete steps to add a hypothetical "Serendipity element" family, illustrating each customisation point.

1. **Layer 1: Concrete geometry type.** Create `SerendipityElement<Dim, Order>`:
   - Store node coordinates, define `H()`, `dH_dx()`, `evaluate_jacobian()`, `map_local_point()` with the serendipity basis functions.
   - No base class needed. The type must be movable and copyable.

2. **Layer 1: Integration strategy.** Create or reuse a quadrature class (`GaussLegendre2D<p>`, `ReducedIntegration<...>`, etc.) exposing `reference_integration_point(i)` and `weight(i)`.

3. **Layer 2: Instantiate through ElementGeometry.** No code changes. The constructor template:

```
ElementGeometry<3> geo(
    SerendipityElement<3, 2>{tag, node_ids},
    GaussLegendre2D<3>{});
```

   automatically instantiates an `OwningModel<Serendipity..., GL...>` and stores it behind the type-erased handle.

4. **Layer 3: Use with ContinuumElement.** No code changes. `ContinuumElement` receives a pointer to the geometry and calls `H()`, `dH_dx()`, `differential_measure()` through the virtual interface. The **B** matrix and assembly are generic.

5. **Layer 4: Mesh import.** Add a case in `GmshDomainBuilder.hh` for the Gmsh element type code, constructing `ElementGeometry` with the serendipity concrete type and the desired integrator.

6. **Optional: Type-safe model.** If the serendipity element will be used in its own model (no mixing), define:

```
using SerendipitySolid =
    ContinuumElement<ThreeDimensionalMaterial, 3,
                     SmallStrain>;
using SerendipityModel =
    Model<ThreeDimensionalMaterial, SmallStrain, 3,
          SingleElementPolicy<SerendipitySolid>>;
```

   This compiles to a contiguous vector with zero virtual dispatch.

What does NOT need to change:

- `ElementGeometry.hh` (new type is auto-detected by the templated constructor).
- `ContinuumElement.hh` (works through geometry pointer).
- `FEM_Element.hh` (type erasure is generic).
- `Model.hh` (policy-parameterised).
- Any analysis class (`LinearAnalysis`, `NLAnalysis`, etc.).
- Any material or constitutive model.

This is the central extensibility promise: **new element families are additive** — they require only new files, not modifications to existing ones — conforming to the Open/Closed Principle.

7.8 Runtime Efficiency Considerations

7.8.1 Virtual Dispatch Budget

In the homogeneous path (`SingleElementPolicy`), the element assembly loop has **zero** virtual calls for the physics: all `inject_K()`, `B()`, `H()`, `dH_dx()` calls are monomorphic and inlineable.

The only virtual calls per Gauss point are:

- `ElementGeometry::evaluate_jacobian()` — 1 vcall for the Jacobian (through pimpl).
- `ElementGeometry::H()`, `dH_dx()` — $n_{\text{nodes}} \times (1 + \text{dim})$ vcalls for shape functions and derivatives.
- `Material::compute_response()` — 1 vcall for the constitutive model (through the strategy pointer).

This is *identical per-element overhead* to OpenSees or Kratos, but `fall_n` avoids the additional vtable dispatch that those frameworks incur at the element container level.

7.8.2 Cache-Friendly Layout

`SingleElementPolicy<E>` stores all elements contiguously in a single `std::vector<E>`. Each element's `MaterialPoint` array is heap-allocated (as a `std::vector<MaterialPointT>`), but its entries are contiguous for that element.

`MultiElementPolicy` stores `FEM_Element` objects contiguously (the `unique_ptr<Concept>` wrappers are packed), but the pointed-to `Model<T>` objects are heap-allocated with potentially scattered addresses. This adds one pointer chase per element — acceptable for heterogeneous cases where the element count is moderate.

7.8.3 DOF Index Caching

`ContinuumElement` caches its flat `dof_indices_[]` array (one entry per element DOF, combining all nodes). The cache is populated lazily on first use and reused across `inject_K()`, `compute_internal_forces()`, and `inject_tangent_stiffness()`. This avoids the per-call overhead of traversing the node pointers to collect DOF indices at every assembly step.

```
void ensure_dof_cache() noexcept {
    if (dofs_cached_) return;
    collect_dof_indices();
}
```

7.8.4 Stack-Allocated Jacobians

The Jacobian matrix crossing the virtual boundary is declared as:

```
using JacobianMatrix = Eigen::Matrix<double, dim,
    Eigen::Dynamic, Eigen::ColMajor, dim, dim>;
```

The `MaxRows = dim`, `MaxCols = dim` template parameters tell Eigen to use a fixed-size stack buffer (up to $3 \times 3 = 72$ bytes) with a dynamic column count. Since `dim` ≤ 3, no heap allocation occurs, even though the column count is "dynamic" (it varies between volume and surface elements).

This ensures that the virtual call to `evaluate_jacobian()` returns by value without any `new`/`delete`, making the hot path allocation-free.

Chapter 8

Generic Boundary and Initial Condition Infrastructure

This chapter documents the design and implementation of the generic boundary condition (BC) and initial condition (IC) infrastructure for `fall_n`. The goals are:

1. **Per-DOF granularity:** constrain individual degrees of freedom (roller supports, symmetry BCs) rather than all DOFs simultaneously.
2. **Imposed (non-zero) Dirichlet:** prescribe non-zero displacement, temperature, or any nodal field value.
3. **Compile-time node selectors:** apply constraints via geometric predicates (plane, box, sphere, custom lambda) that resolve at compile time with zero runtime overhead.
4. **State transfer:** capture the complete post-solve state (`ModelState`) and use it as the initial condition for a subsequent analysis—enabling staged construction, restart, and multi-physics chaining.
5. **Extensibility:** the design should accommodate future field types (temperature, initial stress, pore pressure) without modifying the selector or constraint machinery.

8.1 Gap Analysis: the Legacy API

The original Model API exposed these methods for boundary conditions:

```
void fix_node(size_t node_idx);                          // ALL DOFs = 0
void fix_x(double val, double tol = 1e-6);               // all DOFs at x=val
void apply_node_force(size_t node_idx, auto... f);        // nodal Neumann
void apply_surface_traction(string group, auto... t);     // consistent traction
```

8.2 Design Decisions and Trade-offs

8.2.1 Compile-Time Polymorphism via Concepts

Consistent with `fall_n`'s policy-based architecture (Chapter 7), the node selector system uses C++20 concepts rather than virtual dispatch:

```
namespace fn {
template <typename S, typename NodeT>
concept NodeSelector = requires(const S& s, const NodeT& n) {
    { s(n) } -> std::convertible_to<bool>;
};
```

Table 8.1: Limitations of the legacy BC interface.

Limitation	Impact
`fix_node` constrains *all* DOFs	Cannot model roller supports, symmetry planes, or mixed BCs.
`fix_x/y/z` misnamed	These fix all three displacement components, not just the named one. Misleading to users.
No non-zero Dirichlet via Model API	`global_imposed_solution_` was created and zeroed but never populated through the Model interface. Only `DynamicAnalysis::PrescribedBC` filled it.
`ElementInitialStress` unused	The struct existed in `BoundaryCondition.hh` and was storable in `BoundaryConditionSet`, but no evaluator integrated it into the assembly pipeline.
Procedural selection	Every `fix_*` method hard-coded a coordinate loop. No reusable geometric predicate.
`VecAssemblyBegin/End` per call	`apply_node_force` triggered PETSc assembly for each node.

```
}
```

Any callable `f(const Node<dim>&)-> bool` satisfies `NodeSelector`: lambdas, function objects, and the built-in selectors all qualify. The compiler resolves the predicate at compile time, and after inlining a `PlaneSelector` collapses to a single `fabs` + comparison—zero overhead compared to a hand-written loop.

Why not `std::function`? A `std::function<bool(const Node&)>` would erase the type and force heap allocation for lambdas that exceed the small-buffer size (typically 16–32 bytes). For selectors applied to every node in the mesh, this per-call overhead is measurable. The concept-based approach pays nothing at runtime.

Why not virtual? A virtual `AbstractSelector::operator()` would add one indirect call per node per constraint pass. With 10 000 nodes this is $\sim$10 μs (branch-predictor penalty), acceptable but unnecessary when the concrete type is known at compile time.

8.2.2 Constraint Storage: Extending the Existing Map

The existing `ConstraintDofInfo` type already maps sieve point IDs to (DOF index list, prescribed value list):

```
using ConstraintDofInfo =
  std::map<PetscInt,
           std::pair<std::vector<PetscInt>,
                     std::vector<PetscScalar>>>;
```

The new API *extends* this map rather than replacing it. The key operations are:

1. **Insert in sorted order.** PETSc's `PetscSectionSetConstraintIndices` requires increasing DOF indices. The `constrain_dof` method uses `std::lower_bound` to maintain this invariant.
2. **Merge, not overwrite.** If DOF 0 of a node is already constrained and the user constrains DOF 2, both are stored. An update to DOF 0 changes the prescribed value without duplicating the index.

8.2.3 Non-Zero Dirichlet: Where Values Flow

Non-zero prescribed values are stored in `constraints_` alongside the DOF indices. During `setup()`, a new `fill_imposed_solution()` step extracts these values from the constraint map into the PETSc local vector `global_imposed_solution_`:

```
void setup() {
    setup_boundary_conditions();   // PETSc section
    setup_vectors();               // create Vecs
    fill_imposed_solution();       // NEW: u_D -> imposed
    setup_matrix();                // create Mat
}
```

Remark 8.1. Non-zero Dirichlet requires that the analysis accounts for the coupling $\mathbf{K}_{fc}\,\mathbf{u}_c$ in the right-hand side. `NonlinearAnalysis` handles this naturally: the internal forces $\mathbf{f}_{\text{int}}(\mathbf{u}_{\text{free}} + \mathbf{u}_D)$ include the prescribed part. `LinearAnalysis` currently does *not* apply this correction—for non-zero Dirichlet, users should solve with `NonlinearAnalysis` (which converges in one Newton step for linear problems).

8.2.4 ModelState: Platform-Independent Snapshot

For state transfer between models, we need a data structure that:

- Does *not* depend on PETSc (no `Vec`, `Mat`).
- Does *not* depend on the `MaterialPolicy` template parameter (so an elastic model's state can seed a plastic model).
- Is copyable, movable, and (future) serialisable.

`ModelState<dim>` satisfies all three. It stores:

- Per-node: ID, displacement, velocity.
- Per-element, per-Gauss-point: stress and strain in Voigt notation (`std::array<double, nvoigt>`).

The PETSc-to-array extraction in `capture_state()` uses `VecGetArrayRead` (zero-copy read) and the element's `material_points()` accessor which recomputes stress from the committed strain via the constitutive relation.

8.3 Implementation

8.3.1 NodeSelector.hh Built-in Selectors

Table 8.2: Built-in node selectors.

Selector	Predicate	Parameters
`PlaneSelector<dim>`	$\lvert x_i - v\rvert < \varepsilon$	axis i, value v, tolerance ε
`BoxSelector<dim>`	$x \in [\text{lo}, \text{hi}]$	corners, tolerance
`SphereSelector<dim>`	$\lVert x - c\rVert \le r$	centre c, radius r, tolerance
`NodeIdSelector`	$\text{id} \in S$	set of node IDs

Combinators turn simple selectors into compound predicates:

```
auto corner = fn::select_and(
    fn::PlaneSelector<3>{0, 0.0},    // x = 0
    fn::PlaneSelector<3>{1, 0.0}     // y = 0
);
auto not_x0 = fn::select_not(fn::PlaneSelector<3>{0, 0.0});
auto union_ = fn::select_or(selectorA, selectorB);
```

Convenience factories (`fn::on_plane`, `fn::in_box`, `fn::in_sphere`, `fn::node_ids`) provide a terser syntax.

8.3.2 Model.hh New Constraint Methods

Table 8.3: New Model constraint API.

Method	Description
`constrain_dof(n, d, v)`	Constrain DOF d of node n to value v. Sorted insertion.
`constrain_node(n, vals)`	Constrain all DOFs of node n to the given array of values.
`constrain_dof_where(sel, d, v)`	Constrain DOF d at every node matching selector `sel`.
`constrain_where(sel)`	Constrain all DOFs (homogeneous) at every matching node.
`constrain_where(sel, vals)`	Constrain all DOFs with prescribed values at every matching node.
`is_constrained(n)`	Query: is any DOF of node n constrained?
`is_dof_constrained(n, d)`	Query: is DOF d of node n constrained?
`prescribed_value(n, d)`	Get the prescribed displacement at DOF d (0 if free).
`num_constraints()`	Total number of constrained DOFs across all nodes.
`capture_state()`	Extract current solution into a `ModelState<dim>`.
`apply_initial_displacement(s)`	Populate imposed solution from a `ModelState<dim>`.

8.3.3 Backward Compatibility

The legacy methods `fix_node`, `fix_x`, `fix_y`, `fix_z`, and `fix_orthogonal_plane` remain unchanged in semantics—they continue to constrain *all* DOFs of every matching node. Internally, `fix_orthogonal_plane` now delegates to:

```
void fix_orthogonal_plane(int i, double val, double tol) {
    constrain_where(fn::PlaneSelector<dim>{i, val, tol});
}
```

The code path is identical; only the implementation reuses the selector infrastructure.

8.4 Use-Case Walkthrough: Roller vs. Clamped Cantilever

Consider a cantilever beam $[0, L]\times[0, b]\times[0, h]$ loaded at $x = L$ by a surface traction $\mathbf{t} = (0, t_y, t_z)$.

Clamped support (legacy):

```
M.fix_x(0.0);    // constrains u_x, u_y, u_z at x=0
```

Equivalent new API:

```
M.constrain_where(fn::PlaneSelector<3>{0, 0.0});
```

Roller support (new API): Only $u_x = 0$ at $x = 0$. Rigid body prevention requires additionally constraining u_y and u_z at isolated points:

```
// u_x = 0 on entire face
M.constrain_dof_where(fn::PlaneSelector<3>{0, 0.0}, 0, 0.0);

// Prevent rigid translation + rotation about x:
auto origin = fn::select_and(fn::PlaneSelector<3>{0, 0.0},
    fn::select_and(fn::PlaneSelector<3>{1, 0.0},
                   fn::PlaneSelector<3>{2, 0.0}));
M.constrain_dof_where(origin, 1, 0.0);  // u_y at origin
M.constrain_dof_where(origin, 2, 0.0);  // u_z at origin

auto top_z = fn::select_and(fn::PlaneSelector<3>{0, 0.0},
    fn::select_and(fn::PlaneSelector<3>{1, 0.0},
                   fn::PlaneSelector<3>{2, h}));
M.constrain_dof_where(top_z, 1, 0.0);   // prevents Rx
```

The roller case has 30 constrained DOFs (28 nodes $\times$ 1 + 2 extra) versus 84 (28 $\times$ 3) for the clamped case. With fewer constraints, the beam is more flexible:

Table 8.4: Roller vs. clamped comparison (HEX8 beam, $E = 200$, $\nu = 0.3$).

BC type	**Constrained DOFs**	$\max\lvert u\rvert$	**Ratio**
Clamped	84	0.594	1.00
Roller (u_x only)	30	2.762	4.64×

This confirms: the per-DOF mechanism works correctly and produces a physically meaningful stiffer/more-flexible response.

8.5 State Capture and Continuation Analysis

8.5.1 ModelState Structure

```
template <size_t dim>
struct ModelState {
    static constexpr size_t nvoigt = dim * (dim + 1) / 2;

    struct NodalData {
        size_t node_id;
        array<double, dim> displacement;
        array<double, dim> velocity;        // zero for static
    };

    struct GaussPointData {
        array<double, nvoigt> stress;
        array<double, nvoigt> strain;
    };

    struct ElementData {
        size_t element_index;
        vector<GaussPointData> gauss_points;
    };

    vector<NodalData>   nodes;
    vector<ElementData> elements;
```

```
};
```

8.5.2 Capture Workflow

`Model::capture_state()` extracts:

1. **Nodal displacements:** from the PETSc local vector `current_state_` via `VecGetArrayRead` (zero-copy). Each node's DOF offsets from `node.dof_index()` are used to index into the raw array.
2. **Element stress/strain:** from each `MaterialPoint`'s committed strain (`current_state()`) and recomputed stress (`compute_response()`). The Voigt vectors are copied component-by-component into `std::array<double, nvoigt>`, guarded by the compile-time `num_components` constant.

8.5.3 Future: Initial Stress Integration

The existing `ElementInitialStress<dim>` struct in `BoundaryCondition.hh` can be populated from `ModelState::ElementData`:

```
for (const auto& ed : state.elements) {
    ElementInitialStress<dim> eis;
    eis.element_index = ed.element_index;
    for (const auto& gp : ed.gauss_points) {
        eis.gauss_point_stresses.push_back(gp.stress);
    }
    bcs.add_initial_stress(std::move(eis));
}
```

For this to take effect, the element assembly must incorporate $\boldsymbol{\sigma}_0$ into the internal force:

$$\mathbf{f}_{\text{int}}(\mathbf{u}) = \int_{\Omega_e} \mathbf{B}^T \left(\boldsymbol{\sigma}(\boldsymbol{\varepsilon}(\mathbf{u})) + \boldsymbol{\sigma}_0\right) \mathrm{d}V$$

This requires modifications to `ContinuumElement::compute_internal_force_vector`, specifically adding a σ`_initial` term at each Gauss point. This integration is deferred to a future phase.

8.6 Comparison with OpenSees and Kratos

Table 8.5: BC/IC handling comparison across frameworks.

Feature	OpenSees	Kratos	fall_n
Single-DOF fix	`fix nodeTag dof`	`DISPLACEMENT_X: 0.0`	`constrain_dof(n,d,v)`
Geometric selection	Tcl loops	Python `FindNodalH`	`PlaneSelector`, lambda
Non-zero Dirichlet	`imposedMotion` pattern	`ApplyDirichletProcess`	`constrain_dof_where(s,d,v)`
State transfer	`-database` serialise	`ModelPartIO`	`ModelState` capture/apply
Initial stress	Per-element update	`INITIAL_STRESS_TENSOR`	Defined, not yet integrated
Dispatch cost	Virtual (runtime)	Virtual + Python (runtime)	Compile-time (zero)

Key differences:

- **OpenSees** uses a tag-based Tcl scripting layer for BC specification. Geometric loops require user scripting. State transfer uses a persistence layer (`FE_Datastore`).
- **Kratos** uses Python processes (`ApplyDirichletProcess`, `ApplyNeumannProcess`) that iterate over model parts. Highly flexible but with Python → C++ boundary overhead.
- **fall_n** resolves all selector logic at compile time. The constraint map lives in pure C++ with PETSc-section-based enforcement. No scripting layer, no virtual dispatch per node.

8.7 Extensibility Roadmap

The current infrastructure is designed for forward extension. Table 8.6 outlines planned capabilities and their implementation path.

Table 8.6: Extensibility roadmap.

Capability	Implementation path	Status
Per-DOF constraints	`constrain_dof`, `constrain_dof_where`	**Implemented**
Non-zero Dirichlet	`fill_imposed_solution()` + NL correction	**Implemented** (NL only)
Node selectors	`NodeSelector` concept + built-in selectors	**Implemented**
State capture/transfer	`ModelState` + `capture_state`	**Implemented**
Initial stress	Extend `ContinuumElement::compute_internal_force` to add $\boldsymbol{\sigma}_0$ at each GP	Designed, deferred
Body forces	Consistent nodal load via $\int N^T \mathbf{b}\,\mathrm{d}V$	Planned
Temperature field	Additional `ModelState` field + thermal strain $\boldsymbol{\varepsilon}_\theta = \alpha\,\Delta T\,\mathbf{1}$	Planned
Multi-step builder	Fluent builder with chained `.constrain().material().build()`	Planned
State serialisation	HDF5/JSON export of `ModelState`	Planned
Linear non-zero BC	RHS correction $\mathbf{f}_{\text{eff}} = \mathbf{f}_{\text{ext}} - \mathbf{K}_{fc}\,\mathbf{u}_D$ in `LinearAnalysis`	Planned

8.8 Test Suite

The implementation is validated by 81 tests in `tests/test_boundary_conditions.cpp`, organized as follows:

Table 8.7: Test suite structure (81 tests).

Category	Count	Coverage
Node selectors (pure geometry)	38	PlaneSelector, BoxSelector, SphereSelector, NodeIdSelector, combinators, la
ModelState data structure	9	Default state, add/query, copy semantics
Per-DOF constraints	11	Single DOF, multiple DOFs, non-zero value, value update
Selector-based constraints	10	PlaneSelector on DOF, all DOFs, values, lambda, composite
Full solve: roller vs. clamped	3	Clamped > 0, Roller > 0, Roller > Clamped
State capture after solve	7	Non-empty, node count, element count, non-zero displacement, non-zero str
Backward compatibility	3	`fix_x` gives positive deflection, reasonable magnitude

8.9 Summary

The generic BC/IC infrastructure extends `fall_n` from an all-or-nothing clamped-support tool to a framework capable of:

- **Arbitrary Dirichlet BCs:** per-DOF, per-node, per-selector, with prescribed values (zero or non-zero).
- **Zero-cost selectors:** compile-time geometric predicates with no runtime overhead versus hand-written loops.
- **State snapshots:** PETSc-independent `ModelState` for continuation, restart, and future serialisation.
- **Full backward compatibility:** `fix_x`, `fix_y`, `fix_z` continue to work exactly as before.

The design follows the same policy-based, compile-time polymorphic philosophy established in the element architecture (Chapter 7) and validated by an 81-test suite.

Bibliography

[1] Satish Balay, Shrirang Abhyankar, Mark F. Adams, et al. PETSc Users Manual (revision 3.24). `https://petsc.org/release/docs/manual/`, 2024. Argonne National Laboratory, ANL-21/39.

[2] Philippe G. Ciarlet and Pierre-Arnaud Raviart. General Lagrange and Hermite interpolation in $\mathbb{R}^n$ with applications to finite element methods. *Archive for Rational Mechanics and Analysis*, 46(3):177–199, 1972.

[3] Pooyan Dadvand, Riccardo Rossi, and Eugenio Oñate. An object-oriented environment for developing finite element codes for multi-disciplinary applications. *Archives of Computational Methods in Engineering*, 17(3):253–297, 2010.

[4] Michael G. Duffy. Quadrature over a pyramid or cube of integrands with a singularity at a vertex. *SIAM Journal on Numerical Analysis*, 19(6):1260–1262, 1982.

[5] Walter Gautschi. *Orthogonal Polynomials: Computation and Approximation.* Numerical Mathematics and Scientific Computation. Oxford University Press, 2004.

[6] Christophe Geuzaine and Jean-François Remacle. Gmsh: A 3-D finite element mesh generator with built-in pre- and post-processing facilities. *International Journal for Numerical Methods in Engineering*, 79(11):1309–1331, 2009.

[7] Gene H. Golub and John H. Welsch. Calculation of Gauss quadrature rules. *Mathematics of Computation*, 23(106):221–230, 1969.

[8] A. Grundmann and H. M. Möller. Invariant integration formulas for the n-simplex by combinatorial methods. *SIAM Journal on Numerical Analysis*, 15(2):282–290, 1978.

[9] Preston C. Hammer, O. J. Marlowe, and Arthur H. Stroud. Numerical integration over simplexes and cones. *Mathematical Tables and Other Aids to Computation*, 10(55):130–137, 1956.

[10] Patrick Keast. Moderate-degree tetrahedral quadrature formulas. *Computer Methods in Applied Mechanics and Engineering*, 55(3):339–348, 1986.

[11] Frank McKenna, Gregory L. Fenves, Michael H. Scott, and Boris Jeremić. Open system for earthquake engineering simulation (OpenSees). *Pacific Earthquake Engineering Research Center, University of California, Berkeley*, 2000. `https://opensees.berkeley.edu/`.

[12] Arthur H. Stroud. *Approximate Calculation of Multiple Integrals.* Prentice-Hall Series in Automatic Computation. Prentice-Hall, 1971.

[13] Gábor Szegő. *Orthogonal Polynomials.* Colloquium Publications. American Mathematical Society, 4th edition, 1975.

[14] O. C. Zienkiewicz and J. Z. Zhu. The superconvergent patch recovery and a posteriori error estimates. Part 1: The recovery technique. *International Journal for Numerical Methods in Engineering*, 33(7):1331–1364, 1992.

[15] O. C. Zienkiewicz and J. Z. Zhu. The superconvergent patch recovery and a posteriori error estimates. Part 2: Error estimates and adaptivity. *International Journal for Numerical Methods in Engineering*, 33(7):1365–1382, 1992.