








6.1V-20V Input







800mA, 1.1VDO



USB Power Protection

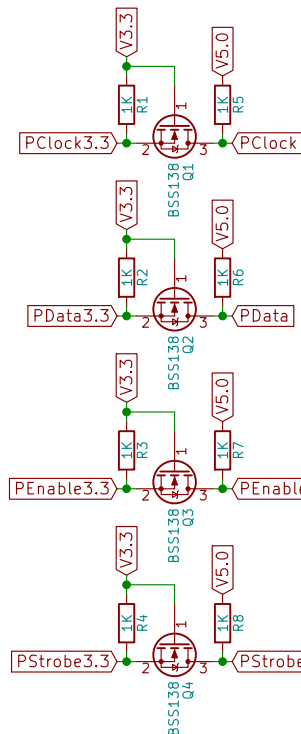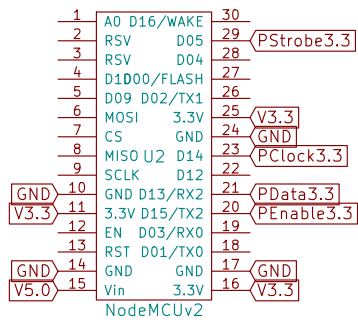

MBI5026CF  
VCC = 5V  
HIGH = >4.0V  
LOW = <1.5V



Matthew Swarts

Sheet: /

File: HangulWordClockNodeMCUV2.sch

**Title: Hangul Word Clock NodeMCUV2**

Size: A Date: 2017-12-10

KiCad E.D.A. kicad 4.0.4-stable

Rev: A

Id: 1/1