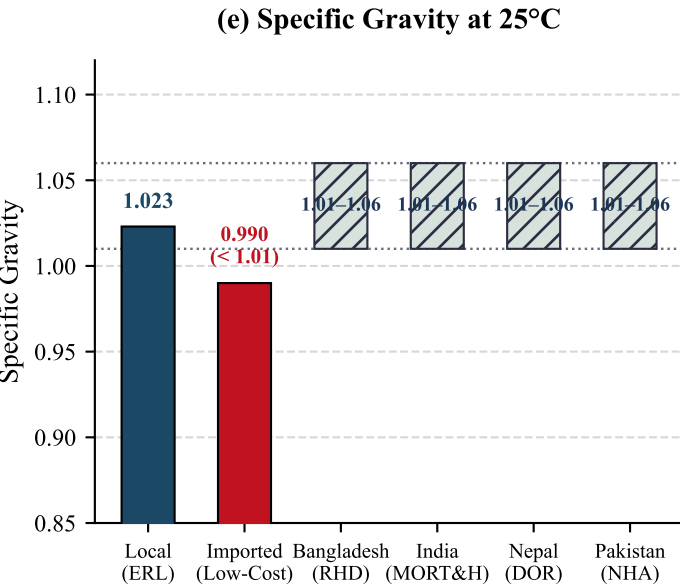
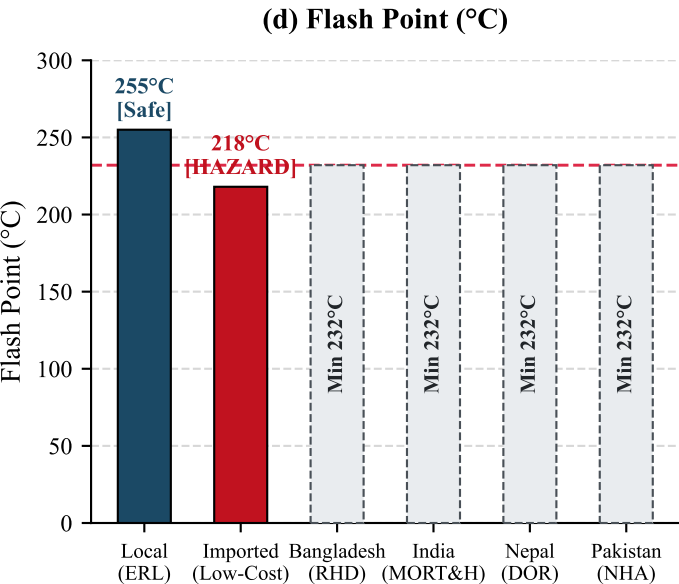
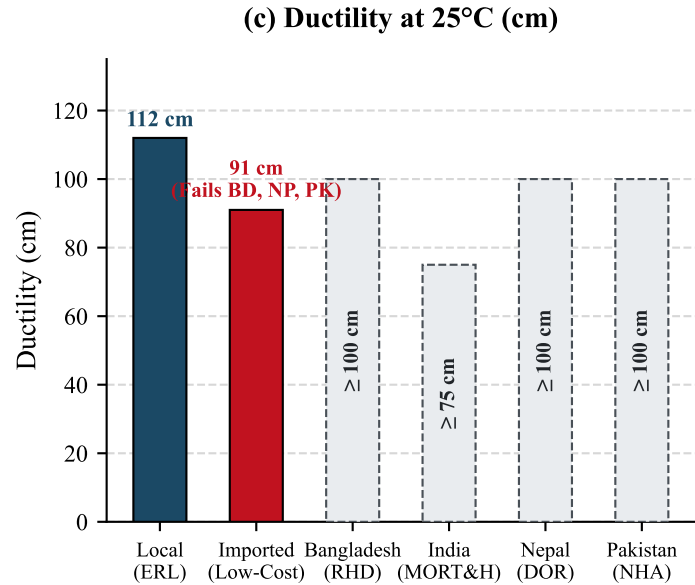
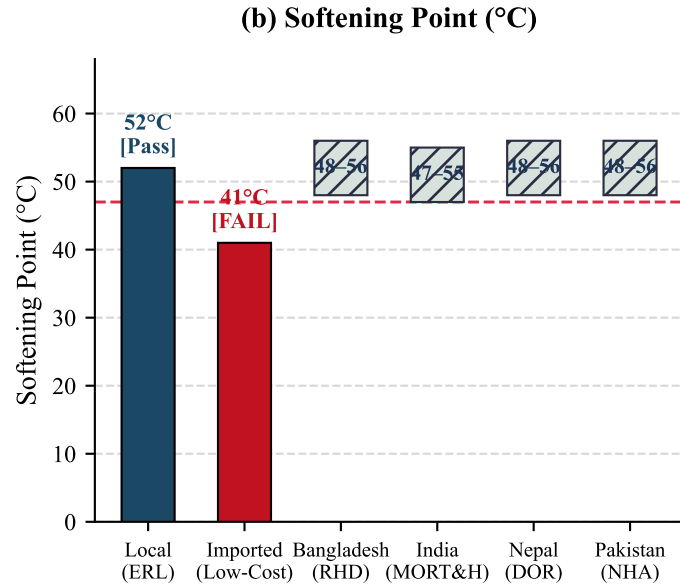
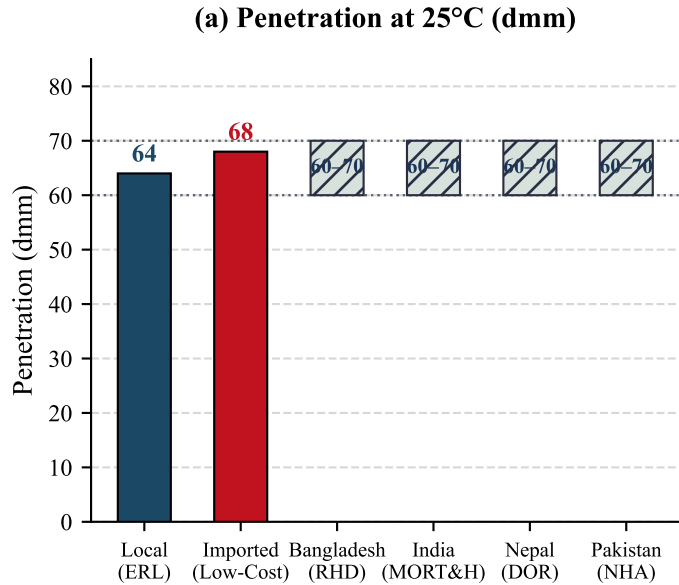


Critical Safety / Quality ThresholdImported Low-Cost Bitumen (Experimental)National Standard Minimum Requirement

(f) Regional Compliance Summary Matrix

Parameter	Local (ERL)	Imported	Regional Status
Penetration	64 dmm	68 dmm	All Comply (60-70)
Softening Pt.	52 °C	41 °C	Imp. Fails All Standards
Ductility	112 cm	91 cm	Imp. Fails BD/NP/PK
Flash Point	255 °C	218 °C	Imp. Fire Hazard (<232)
Specific Gravity	1.023	0.990	Imp. Substandard (<1.01)