






(a) Penetration at 25°C (dmm)

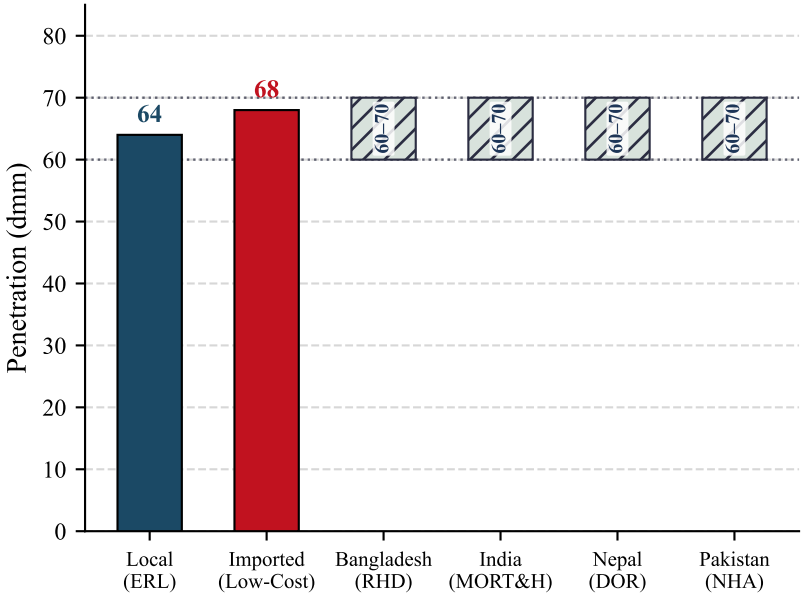


(b) Softening Point (°C)

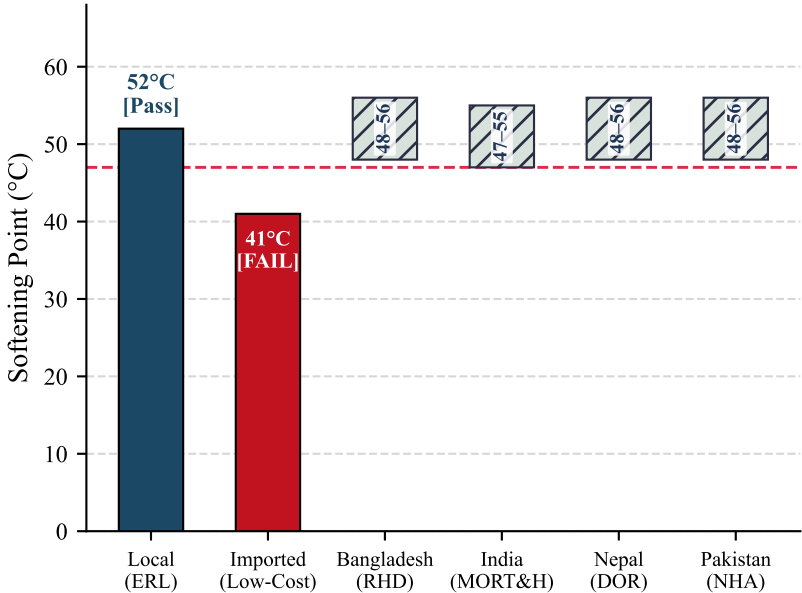


(c) Ductility at 25°C (cm)

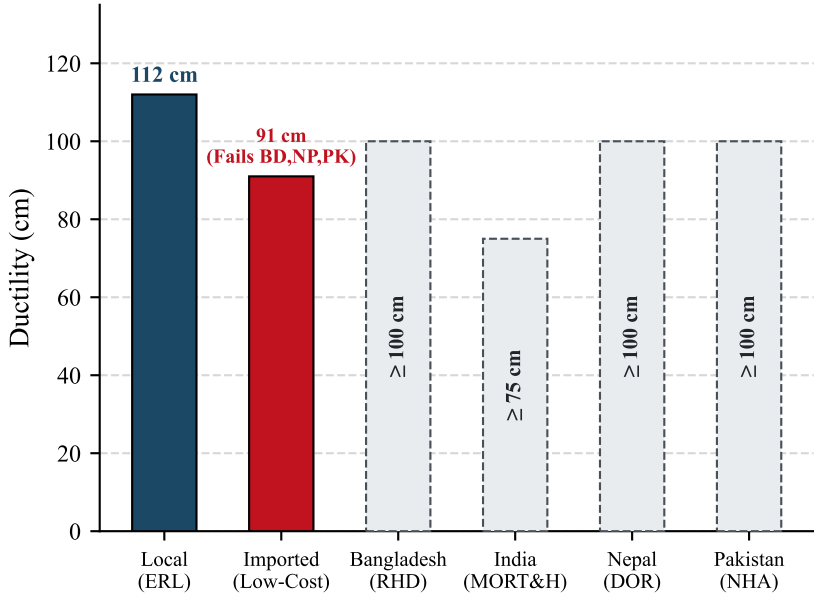

(d) Flash Point (°C)

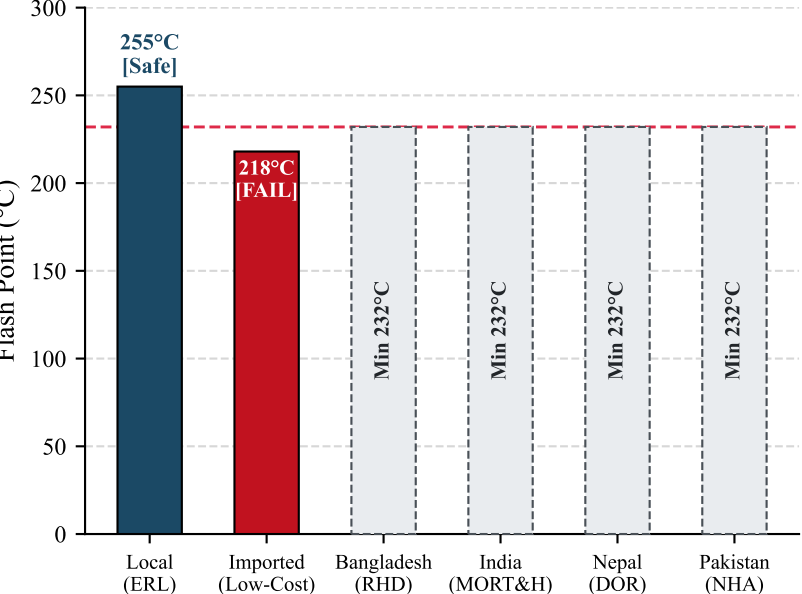

(e) Specific Gravity at 25°C

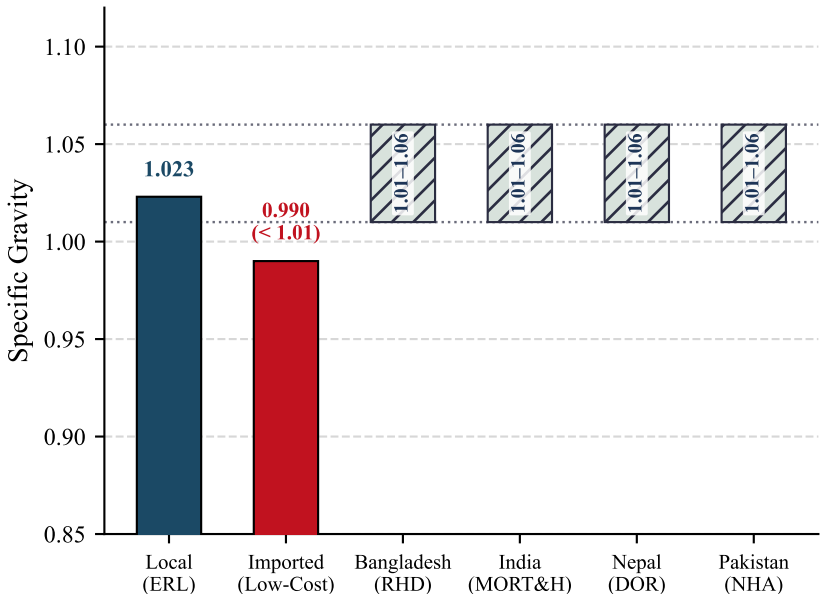

(f) Regional Compliance Summary Matrix

Parameter	Local (ERL)	Imported	Regional Status
Penetration	64 dmm	68 dmm	All Comply (60-70)
Softening Pt.	52 °C	41 °C	Imp. Fails All Standards
Ductility	112 cm	91 cm	Imp. Fails BD/NP/PK
Flash Point	255 °C	218 °C	Imp. Fire Hazard (<232)
Specific Gravity	1.023	0.990	Imp. Substandard (<1.01)