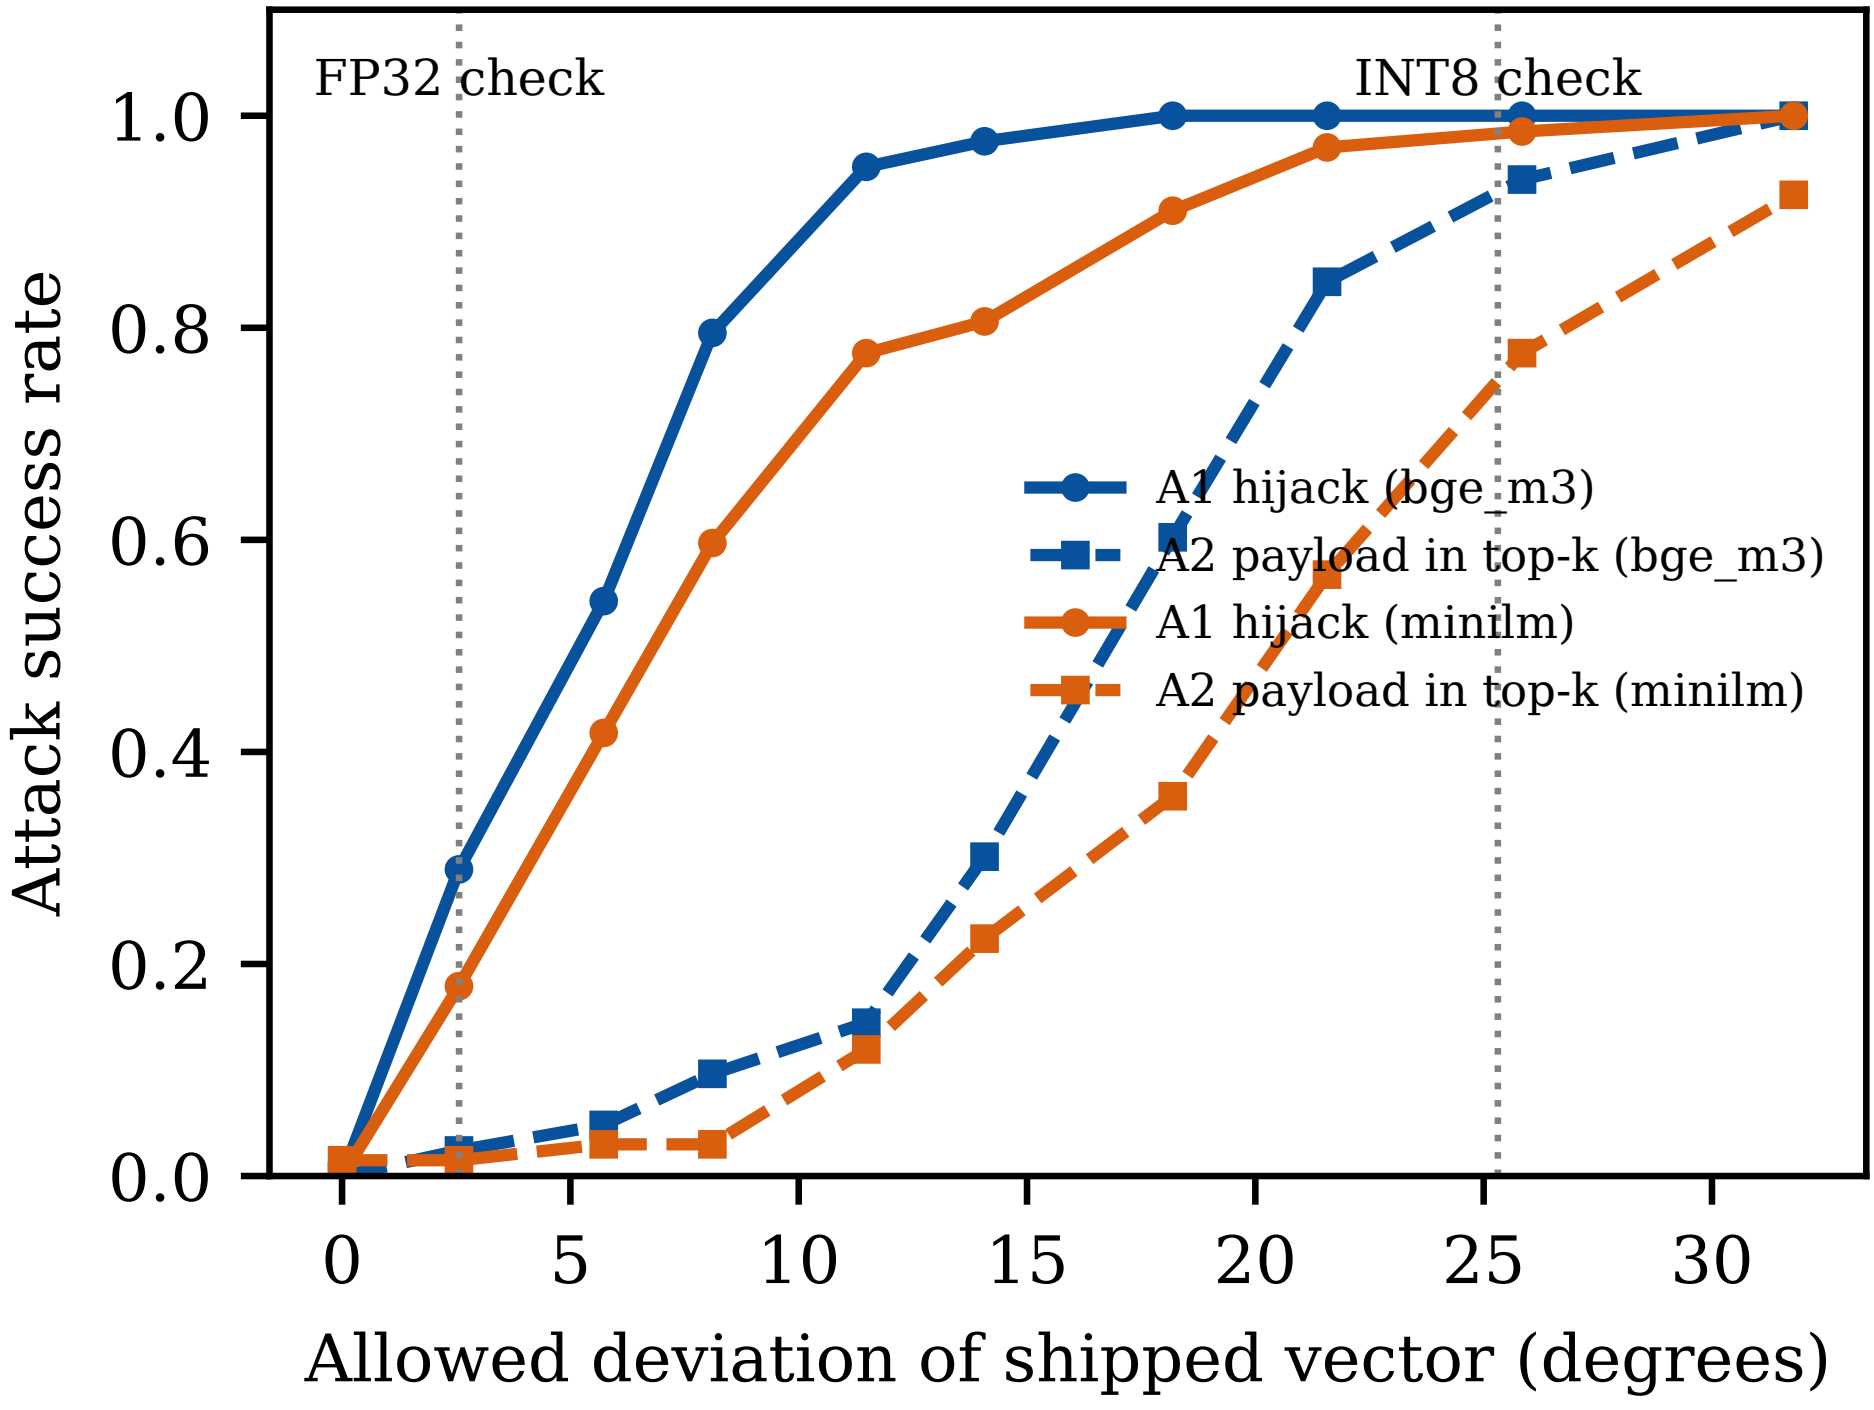
FP32 check
INT8 check
A1 hijack (bge_m3)
A2 payload in top-k (bge_m3)
A1 hijack (minilm)
A2 payload in top-k (minilm)
Attack success rate
0.0
0.2
0.4
0.6
0.8
1.0
0
5
10
15
20
25
30
Allowed deviation of shipped vector (degrees)