

01. Introduction

- **Network Edge** - Hosts (Clients and servers)
- **Access Networks** - Wired and wireless communication links
- **Network Core** - Network of interconnected routers

Network Core

- **Store and Forward** - Entire packet must arrive at router before being transmitted to next link

Key Functions of Network Core

- **Routing** - Determines source-destination routes taken by packets (How we get the hashtable)
- **Forwarding** - Move packets from router's input to correct router output

Packet-Switching


- Host breaks messages into packets of L bits
- Transmits packets into access network at transmission rate R (aka Link bandwidth, capacity)

$$\text{Packet Transmission Delay} = \frac{\text{Packet Size (bits)}}{\text{Transmission Rate (bits/sec)}}$$

Circuit Switching

- Resources reserved for call between source and destination
- End to end resources allocated and reserved
- Set up and teardown required
- Circuits like (guaranteed) performance cos circuit reserved per usage
- Pros: Better performance
- Cons: More resources (Unable to share with other processes)

Internet Structure

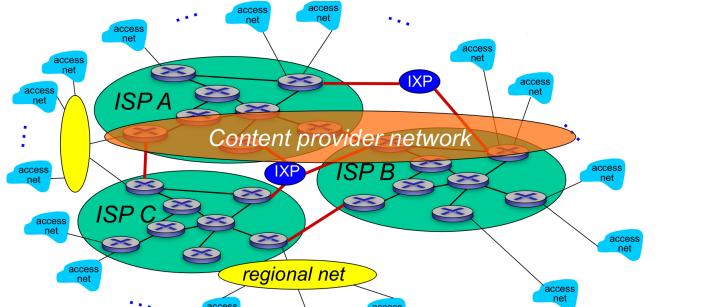- 
- Diagram illustrating the Internet structure:
- End systems connect to Internet via **Access Internet Service Providers (ISPs)** (autonomous systems → regional ISP → Access ISP → hosts)
 - ISPs connect to larger global ISPs (usually competitors)
 - Large ISPs connect via **peering links** or **internet exchange points (IXP)**
 - **IXP** - Physical place with routers from different ISPs
 - **Regional Networks** - Smaller ISPs
 - **Content Provider Networks** - Provide content close to end users

Loss, Delay, and Throughput

Packet Loss

- If Arrival Rate > Transmission Rate, packets will queue and can be dropped if buffer fills up
- Solutions: Lost packets can be retransmitted


Packet Delay

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

- **Nodal Processing** - (d_{proc}) Check for bit errors and determine output link
- **Queueing Delay** - (d_{queue}) Time at queue waiting for transmission, router congestion
- **Transmission Delay** - (d_{trans}) Time to load packet onto link
- $d_{\text{trans}} = \frac{L}{R}$ where L is packet length and R is link bandwidth
- **Propagation Delay** - (d_{prop}) Time for 1 bit to reach end of link
- $d_{\text{prop}} = \frac{d}{s}$ where d is length of link and s is propagation speed
- Does not depend on packet size, number of packets or number of intermediate nodes

Throughput

- Rate at which bits transferred between hosts
- Different from transmission rate (Theoretical upper bound)
- Measures end-to-end, even through intermediaries
- Irregardless of the size of packets
- Dealing with bottlenecks over n packets:

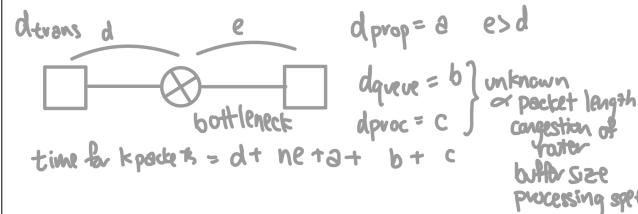

- Average: Rate over long period of time
- Instantaneous: Rate at given point in time

Protocol Layers and Service Models


- **Protocol** - Defines format, order of messages sent and received, and actions taken on message transmission
- **Layering** - Each layer implements a service by doing something within layer and relying on services provided by layer below it
 - Explicit structure allows us to make sense of complex components
 - Easy maintenance (Like OOP, change in 1 layer should not affect others)

Internet Protocol Stack

1. **Application** - eg. FTP, SMTP
2. **Transport** - TCP, UDP
3. **Network** - IP, Routing protocols
4. **Link** - Ethernet, WiFi, PPP
5. **Physical** - Wires, bits

- **Encapsulation** - Take information from a higher layer and adds a header to it, treating the higher layer information as data

Topology

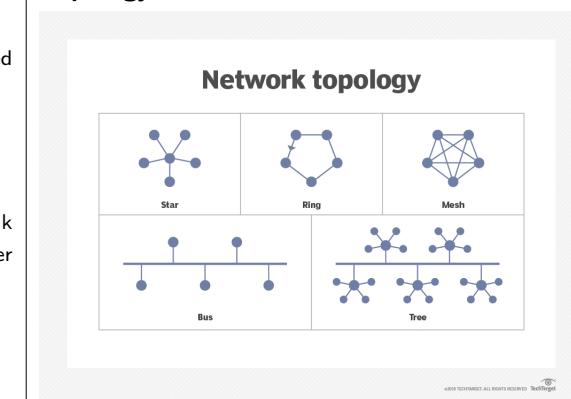

02. Application Layer

- Programs that run on end systems, and not on network-core devices

Client-server Architecture

- **Server**: Always-on host, Permanent IP address, waits for incoming req and provides service to client
- **Clients**: Communicates with server, Intermittently connected, Dynamic IP addresses, Do not communicate with each other directly, initiate connection with server to request services

P2P Architecture

- Peers request service from other peers and provide service in return
- No always-on server, Intermittently connected, Dynamic IP addresses
- **Self Scalability** - New peers offer new services and demands

Process

- **Inter-process Communication** - How 2 processes in 1 host communicate
- **Socket** - Process sends/receives messages to/from its socket (like a door)
 - Outside of socket, transport layer delivers message

Addressing Processes

- Motivation: IP address is not enough to address process, since many processes can be running on same host
- **Identifier** - IP address and port number
- **IP** - 32-bit address for identifying host
- **Port Number** - 16-bit to identify specific process on host

Services

- **Data Integrity** - Reliable data transfer
- **Timing** - Low delay/latency
- **Throughput** - Minimum amount of throughput for effectiveness
- **Security** - Encryption, data integrity

Transport Protocol Services

1. TCP - Transmission Control Protocol

- Reliable transport
- Flow control: Sender does not overwhelm receiver
- Congestion control
- Connection-oriented: Setup required between client and server

2. UDP - User Datagram Protocol

- Unreliable data transfer
- Fast
- Does not guarantee minimum throughput and timing

App-layer Protocol

- Types of messages exchanged (e.g. Request or response)
- Message syntax: How fields are delineated
- Messages semantics: Meaning of information in fields


HTTP - 80

• Hypertext Transfer Protocol - Web's application layer protocol

- Motivation: Web page consists of objects (HTML, images). Need method to request/send web objects.
- Follows client/server model
- Uses TCP
- Stateless - Server maintains no information about past requests

Non-persistent HTTP 1.0

- At most 1 object sent over TCP connection
- Downloading multiple objects requires multiple TCP connections
- New TCP connection for each web resource/object



- Server closes TCP connection after sending file

- **Return Trip Time** - (RTT) Time for small packet to travel from client to server and back


- RTT is $2 * d_{prop}$

- Response Time: 2 RTT + File transmission time

Persistent HTTP


- Multiple objects can be sent over single TCP connection
- Server leaves TCP connection open after sending response
- As little as one RTT for all referenced objects

HTTP Request Message

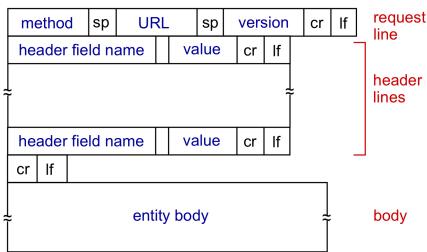

- To upload form input: **POST method** - Input uploaded via entity body and **URL method** - Input uploaded in URL field of GET method
- **HTTP/1.0** - GET, POST, HEAD (Ask server to leave request object out of response)
- **HTTP/1.1** - GET, POST, HEAD, PUT, DELETE

HTTP Response Message

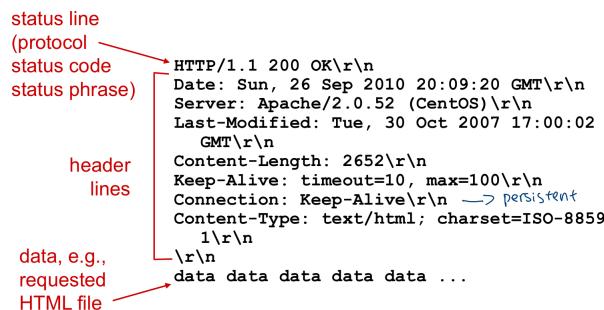

Error codes

200 OK

301 Moved permanently

304 Not modified (during conditional GET)


400 Bad request

404 Resource not found

505 HTTP Version Not Supported

Cookies

- Maintains state on client side
- Components: Cookie header for HTTP response, Cookie header for HTTP request, Cookie file on user's host (Key-value pair), Database on server

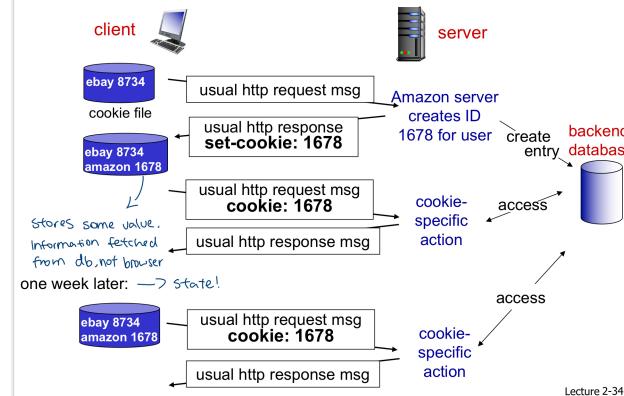

Web Cache (Proxy Server)

- Goal: Fulfill request without involving origin server via caching
- Browser sends all HTTP requests to cache
- Pros: Faster, Reduces traffic to origin server
- Cons: What if origin server updates?
- **Conditional GET** - Origin server doesn't send object if cache has updated version
- Cache: Specifies date of cached copy in HTTP request to origin (If-modified-since)
- Origin Server: Response contains no object if cached object is updated (Empty content body)

Domain Name System - 53

- Maps between hostname (e.g. yahoo.com) and IP address
- Implemented using distributed and hierarchical databases
- Application-layer protocol (Why?)
- Build complexity in edges to simplify inner core networks
- Uses UDP (Much faster and smaller packet overhead)
- Services provided


Host/Email aliasing Additional name for complicated hostnames

Load balancing Providing multiple IP addresses for the same URL

- **Local DNS Name Server** - Local cache of name-to-address mapping. Forwards query into hierarchy.
- **Time to Live** - (TTL) Cached mappings disappear after some time
- **Root Name Server** - Contacted by local name server that cannot resolve name. Provides IP address of TLD servers.
- **Top-level Domain Server** - (TLD) Provides IP address of authoritative server
- **Authoritative DNS Server** - Organization's own DNS server. Provides mappings for organization's named hosts.


Lecture 2-34

- Iterated query: "Not sure, ask this server"



- Recursive query: "Okay, let me find for you"

- Heavy load on upper levels of hierarchy

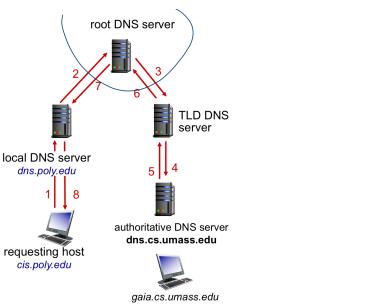

DNS Caching

Cache entry - Cache record of recent name mapping


- Timeout after some time based on TTL
- Best effort name-to-address translation (can be out-of-date)
- **Resource record** - Mapping btw hostname and IP
- Format: $\{NAME, TYPE, VALUE, TTL\}$

DNS Cache poisoning

- DNS spoofing attack - Rogue DNS records introduced in resolver's cache, leading to incorrect IP address reply


03. Socket Programming with UDP and TCP

UDP Socket

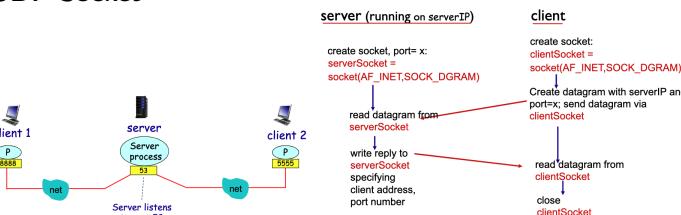

- No connection beforehand. Just send it.
- Server has 1 socket to serve all clients
- Sender attaches destination IP address and port number (**Stateless**)
- Unreliable datagram: Data may be lost or out-of-order
- **Datagram** - Group of bytes

TCP Socket

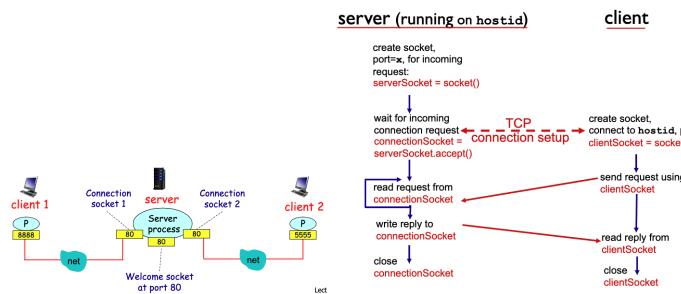

- Client establishes connection to server via welcome socket

- Server makes new socket for each client

- Server identifies client via connection (**Stateful**)

- Reliable stream pipe: Data always in order

Remarks

- SOCK_STREAM - TCP, SOCK_DGRAM - UDP
- Can only specify destination port numbers, source port numbers randomly assigned by OS

04. UDP and Reliable Protocol

Transport Layer Services


- Provide logical communication between processes in different hosts
- VS network: Process-to-process VS host-to-host
- Sender: Breaks app messages into segments
- Receiver: Reassembles segments

UDP

- On top of network layer, UDP adds:

1. Connectionless multiplexing/de-multiplexing
 - UDP segments contain both source and destination ports
 - **Multiplexing** - Sent to target processes
 - **Demultiplexing** - Delivering the received segments at the receiver side to the correct app layer processes
2. Checksum

UDP Segment Header



Note that length includes 8 byte header + body content


Checksum

- Goal: Detect errors in received segment

1. Treat UDP segment as sequence of 16-bit integers
2. Add every 16-bit integer (Carry added back to result)
3. Invert to get UDP checksum (1's complement)
4. When receiving, sum segment again. All 1s if correct.


Reliable Data Transfer (rdt)


- Characteristics of unreliable channel will determine services provided by rdt
- Cannot fix unordered packets

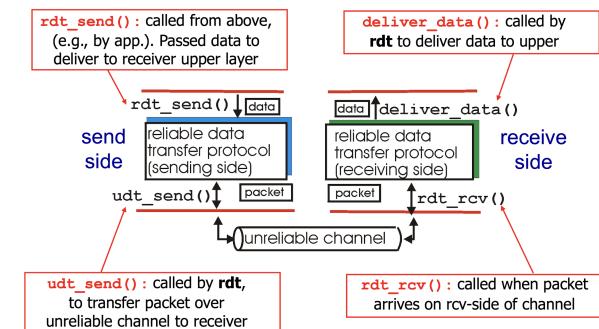

rdt 2.0



- New problem: **Bit error** - May flip bits in packet
- Solution:
 - Perform checksum to detect bit errors
 - **Stop and wait protocol** - Sender sends one packet at a time and wait for response
 - **ACK** - Receiver tells sender that packet received is ok
 - **NAK** - Receiver tells sender that packet received has errors (retransmission)

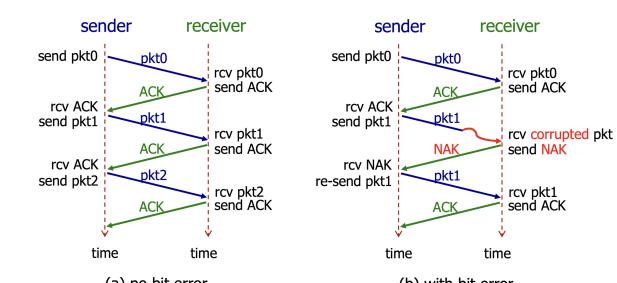

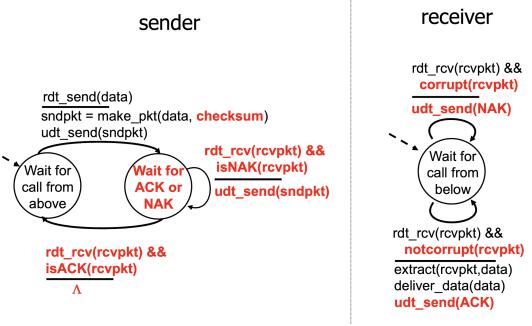

rdt 2.1

- New problem: ACK/NAK may be corrupted
- Solution: Sender retransmits packet after receiving corrupted ACK/NAK
- New problem: Duplicate packets during retransmission
- Solution: Sender adds **sequence number** to each packet and receiver discards duplicate packet (Only 0 and 1 needed)

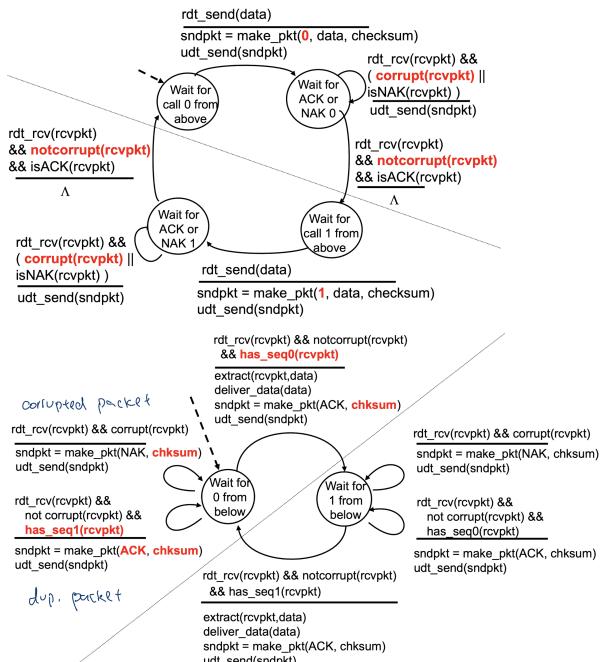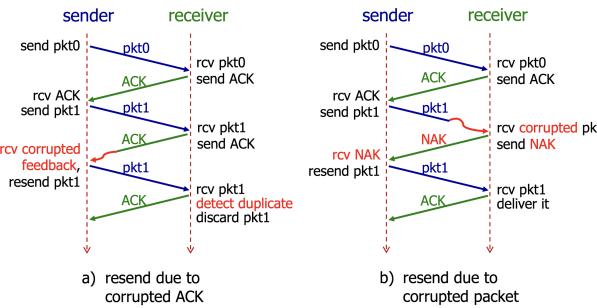


rdt 2.2

- No NAK, only ACKs
- Receiver sends ACK for last packet received. **ACK must include seq number of packet**.
- Receiver send duplicate ACK to retransmit current packet

rdt 3.0

- New problem: Lost packets
- Solution: Sender waits for some time for ACK and retransmits packet
 - What if duplicate packet? Sequence number handles this.
 - What if duplicate ACK? Do nothing.

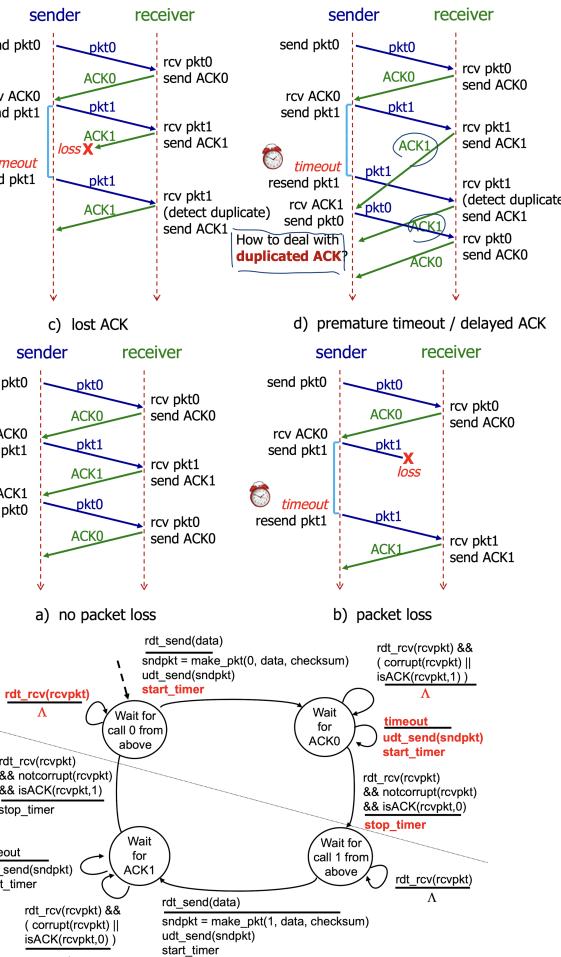

Performance of rdt 3.0

- **Stop-and-wait protocol** - Sender sends 1 packet at a time, then waits for receiver response
- Performance is bad. Stop-and-wait protocol limits use of resources
- **Utilization** - Fraction of time sender is busy sending
 - Given: 1 Gbps link, 15 ms prop. delay, 8000 bit packet

- $D_{trans} = \frac{L}{R} = \frac{8000 \text{ bits}}{10^9 \text{ bits/sec}} = 8 \text{ microsecs}$
- $U_{sender} = \frac{D_{trans}}{RTT + D_{trans}} = \frac{0.008}{30.008} = 0.027\%$
- Pipelined Utilisation = $U * \text{window_size}$


Pipelined Protocols

- **Pipelining** - Sender allows multiple not-yet-ACKed packets
 - Need more sequence numbers
 - Buffering at sender and receiver

Pipeline vs Parallel (HTTP)

- Parallel connections need to retrieve HTML webpage first before retrieving data elements
- Pipeline can retrieve HTML and data elements all at once


Go-Back-N

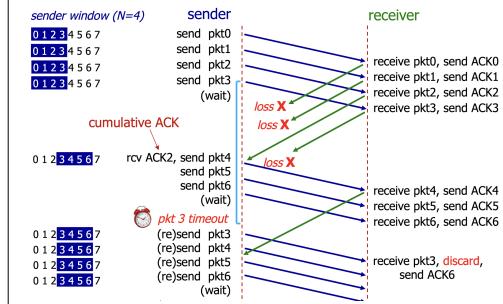

- Intuition: Sliding window

- Sender:
 - Timer for oldest in-flight packet
 - If timeout(n), retransmit packet n and other pkts in window
- Receiver:
 - **Cumulative ACK** - ACK for correct pkt with highest in-order sequence
 - Only ACK packets that arrive **in-order**
 - Discard **out-of-order** packets
- Not efficient, since future packets discarded if out-of-order

Selective Repeat

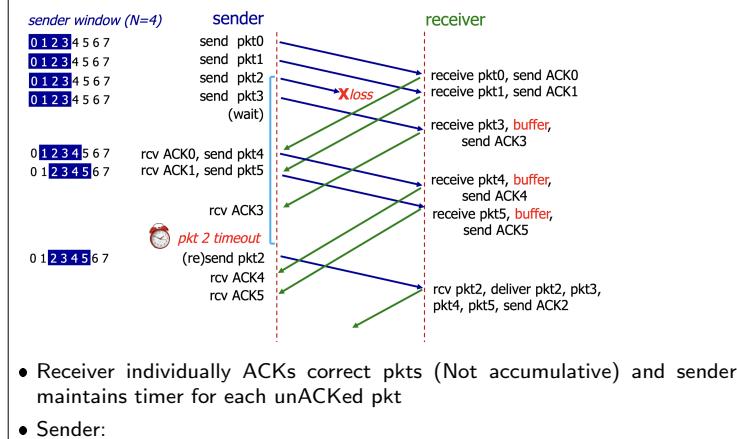

- If timeout(n), retransmit packet n only
- If ACK(n) and n is smallest unACKed pkt, slide window

• Receiver:


- Once receive pkt n in window, send ACK(n). If out-of-order, buffer. If in-order, deliver and slide window
- Once receive pkt n outside of window, still send ACK(n)
- ACK m == packet m received but has no implication on receipt of other packets

05. TCP

TCP Features

- **Point-to-point** - 1 sender and 1 receiver
- **Connection-oriented** - Handshaking before exchange data
- **Full duplex** - Bi-directional data flow in connection
- Reliable, in order and pipelined
- Buffers on both hosts
- Limited by **Maximum Segment Size** $\approx 1460B$
 - Refers only to content length (no header)
 - Limited by **MTU** - Maximum transmission unit, size of largest IP transaction

Structure

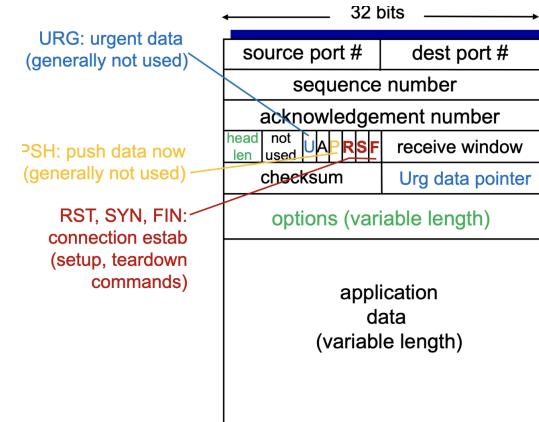

1. Sequence

- Let receiver know if packet is retransmission or new data
- Value only measures the body length in bytes
- Initial number randomly generated btw $0 - (2^{32} - 1)$ (Why?)
 - Security
 - Prevent duplicate sequence numbers when link is used extensively
- ACK # = next byte expected by receiver (initial seq # + data length in bytes)
- SYN # = byte number of first byte(expected ACK (of sender) - data length)

2. ACK number


3. rwnd - Receive window

- Number of bytes the receiver is willing to accept
- **Flow control** - Prevent overflow of receiver's buffer


4. Flags - Connection establish or priority

Establish TCP connection

Creates $n+1$ sockets for n clients (additional 1 for listening)

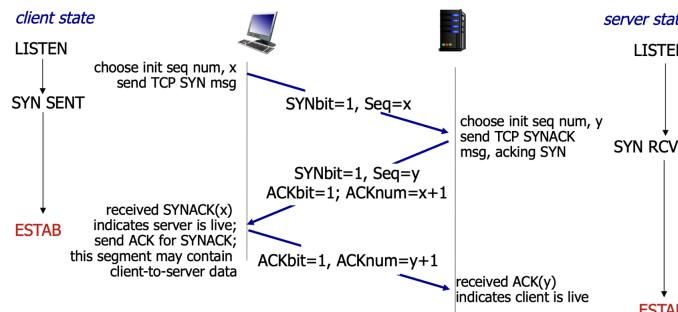

Close TCP connection

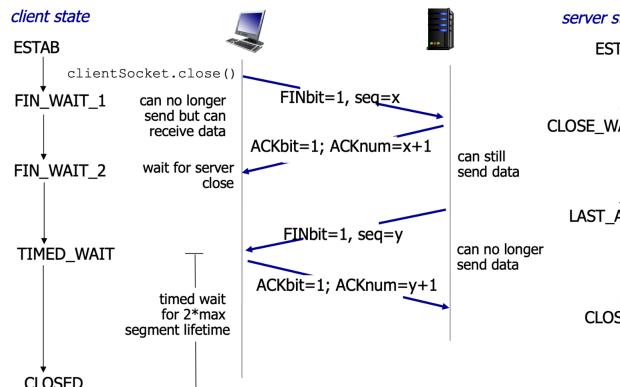

Why **TIMED_WAIT** (2^*MSL - Maximum segment lifespan)

- Guarantee the port has been closed completely
- Prevent delayed data segments from being received by other TCP connections


RDT

Features

- Pipelined segments
- Cumulative ACKs (like GBN)
- Single retransmission timer
- Retransmit only missing packets (SR)

Retransmission Scenarios

Send ACKs every other packet OR after timeout of packet OR receive gapped

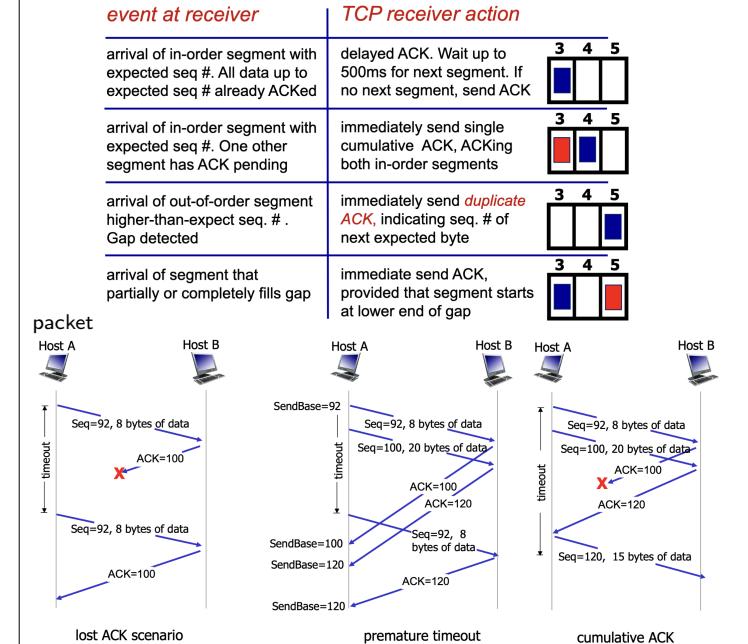

RTT

- Problem: Estimate timeout value for retransmission
- Solution: Average recent **SampleRTT** - Measured time from segment transmission until ACK
- $\text{EstimatedRTT} = (1 - \alpha) * \text{EstimatedRTT} + \alpha * \text{SampleRTT}$
 - Exponential weighted moving average
- **DevRTT** - Margin due to deviation from Estimate RTT
 - $(1 - \beta) * \text{DevRTT} + \beta * (\text{Sample RTT} - \text{Estimated RTT})$
- **Timeout Interval** - $\text{EstimatedRTT} + 4 * \text{DevRTT}$
- $\alpha \approx \frac{1}{8}$, $\beta \approx \frac{1}{4}$

Fast retransmission

- Retransmit unacked segment **IMMEDIATELY** with **smallest seq #** after receiving 4 ACKs for same data

Midterm tips

1. Bits are b and bytes are B (8 bits = byte)

06: IP Addressing

Function

1. **Forwarding** - Move packets from router input to output
2. **Routing**
 - Determine route taken by packets from source to destination
 - Plan trip from source to destination

Planes

1. Data plane
 - Local per router function
 - Determines how datagram forwarded to output port
2. Control plane
 - Network wide logic
 - Routing algorithms

Subnet

- Network formed by directly interconnected host
- Internal host can communicate without router
- Connect to external networks with router
- Same network prefix
- Valid subnet masks
 - 254, 252, 248, 240, 224, 192, 128

CIDR


- ❖ An IP address logically comprises two parts:



❖ CIDR: Classless InterDomain Routing

- arbitrary length for the subnet portion (network prefix)
- address format: a.b.c.d/x, where x is # bits in subnet portion of address

❖ Example 200.23.16.0/23



Subnet mask

- ❖ **Subnet mask** is made by setting all network prefix bits to "1"s and host ID bits to "0"s.

- example: for IP address 200.23.16.42/23:

IP address in binary	
Subnet mask in decimal	255.255.254.0
Subnet mask in binary	11111111 11111111 11111110 00000000

- used to determine which network an IP address belongs to (use bitwise AND operation)


Hierachial addressing

- ❖ **Route aggregation** - Advertise routing information by grouping similar IP addresses

Longest Prefix matching

DHCP

- Dynamic Host Configuration Protocol** - Lease IP address from network server when joining network
- Runs over UDP, Client #:68
 - Router can act as DHCP
 - Server #: 67, sends "DHCP ack" and "DHCP offer"
 - Client #: 68, sends "DHCP request" and "DHCP discover"

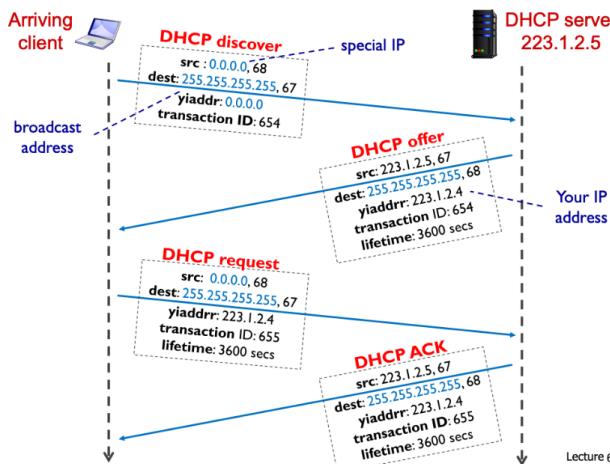

Lecture 6-28

What happens when multiple servers in network?

- Transaction ID specifies the DHCP connection