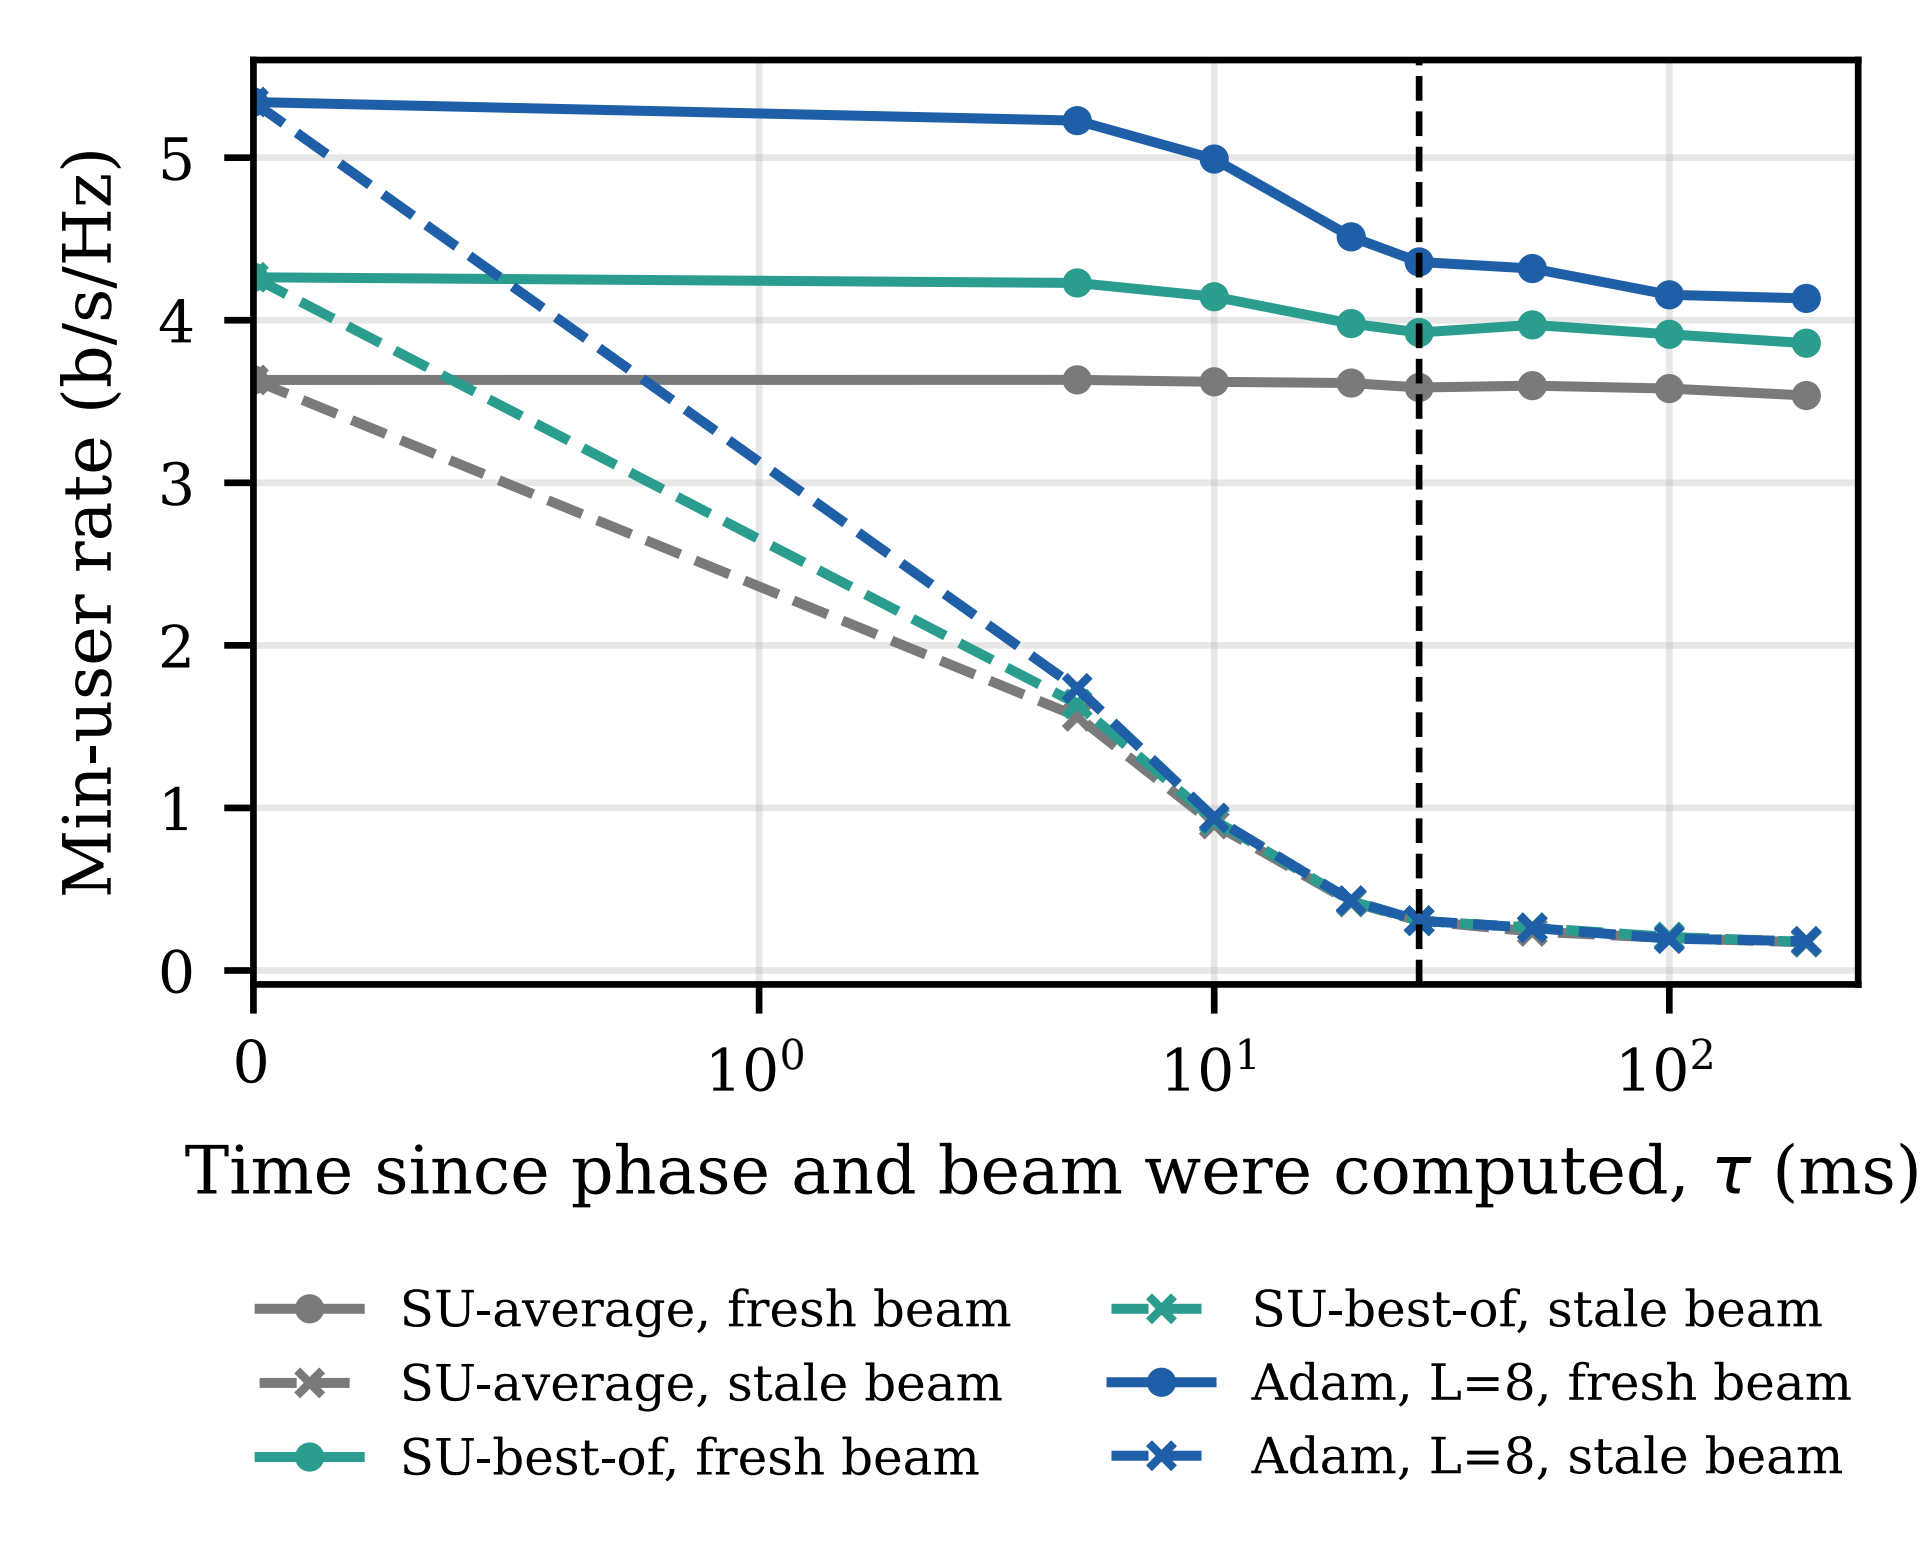
Min-user rate (b/s/Hz)
0
1
2
3
4
5
0
10^0
10^1
10^2
Time since phase and beam were computed, τ (ms)
SU-average, fresh beam
SU-average, stale beam
SU-best-of, fresh beam
SU-best-of, stale beam
Adam, L=8, fresh beam
Adam, L=8, stale beam