



Air Curtain & HVACR Parts



SEERVI TRADING

HVAC & REFRIGERATION


PRODUCT CATALOGUE

Air Curtain & HVACR Parts

SEERVI TRADING

Product catalogue

Air Curtain

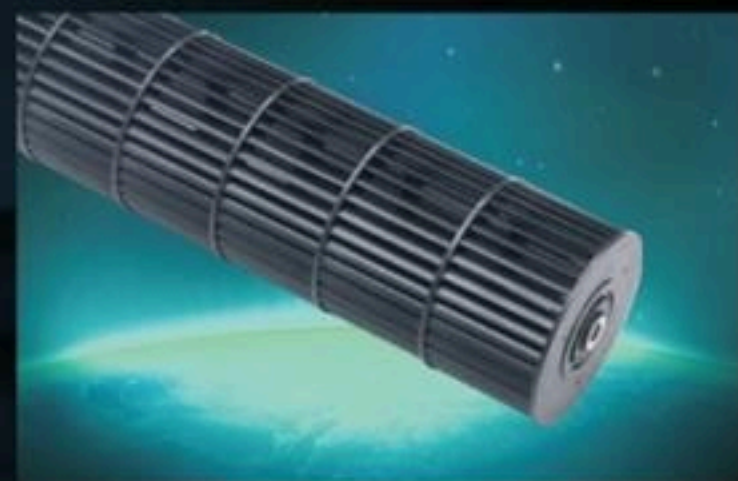

Model B	Rated Voltage	Input Power (W)	Air Speed (m/s)	Air Volume (m³/h)	Noise (dB)	Installation High (m)	N.W (kg)	G.W (kg)	Dimension (mm)	Packing Size (mm)
FM-1209B-2Y	220V 50/60Hz	115	10-11	1380	44	2.3-3.0	7.6	8.8	900x165x200	960x200x250
FM-1210B-2Y	220V 50/60Hz	135	10-11	1560	44	2.3-3.0	8.0	9.3	1000x165x200	1060x200x250
FM-1212B-2Y	220V 50/60Hz	160	10-11	1920	45	2.3-3.0	9.9	11.3	1200x165x200	1260x200x250
FM-1215B-2Y	220V 50/60Hz	200	10-11	2460	46	2.3-3.0	10.9	12.5	1500x165x200	1560x200x250
FM-1218B-2Y	220V 50/60Hz	230	10-11	3000	47	2.3-3.0	14.1	15.9	1800x165x200	1860x200x250
FM-1220B-2Y	220V 50/60Hz	270	10-11	3360	49	2.3-3.0	14.5	16.6	2000x165x200	2060x200x250
FM-1209B1-2Y	220V 50/60Hz	150	12-13	1820	45	3.0-3.5	10.1	11.4	900x190x225	960x225x275
FM-1210B1-2Y	220V 50/60Hz	170	12-13	2060	45	3.0-3.5	10.7	12.1	1000x190x225	1060x225x275
FM-1212B1-2Y	220V 50/60Hz	210	12-13	2540	46	3.0-3.5	12.8	14.3	1200x190x225	1260x225x275
FM-1215B1-2Y	220V 50/60Hz	240	12-13	3250	47	3.0-3.5	15.7	17.4	1500x190x225	1560x225x275
FM-1218B1-2Y	220V 50/60Hz	280	12-13	3960	48	3.0-3.5	18.6	20.5	1800x190x225	1860x225x275
FM-1220B1-2Y	220V 50/60Hz	320	12-13	4440	50	3.0-3.5	19.1	21.3	2000x190x225	2060x225x275
FM-1509B-2Y	220V 50/60Hz	230	14-15	2130	47	4.5-5.0	12.6	14.0	900x210x255	960x245x305
FM-1510B-2Y	220V 50/60Hz	250	14-15	2450	47	4.5-5.0	13.4	15.0	1000x210x255	1060x245x305
FM-1512B-2Y	220V 50/60Hz	320	14-15	2960	48	4.5-5.0	15.8	17.4	1200x210x255	1260x245x305
FM-1515B-2Y	220V 50/60Hz	370	14-15	3790	50	4.5-5.0	18.6	20.4	1500x210x255	1560x245x305

Air Curtain



Model A	Rated Voltage	Input Power (w)	Air Speed (m/s)	Air Volume (m³/h)	Noise (dB)	Installation High (m)	N.W (kg)	G.W (kg)	Dimension (mm)	Packing Size (mm)
FM-1209A-2Y	220V 50/60Hz	115	10-11	1380	44	2.3-3.0	7.6	8.8	900x165x200	960x200x250
FM-1210A-2Y	220V 50/60Hz	135	10-11	1560	44	2.3-3.0	8.0	9.3	1000x165x200	1060x200x250
FM-1212A-2Y	220V 50/60Hz	160	10-11	1920	45	2.3-3.0	9.9	11.3	1200x165x200	1260x200x250
FM-1215A-2Y	220V 50/60Hz	200	10-11	2460	46	2.3-3.0	10.9	12.5	1500x165x200	1560x200x250
FM-1218A-2Y	220V 50/60Hz	230	10-11	3000	47	2.3-3.0	14.1	15.9	1800x165x200	1860x200x250
FM-1220A-2Y	220V 50/60Hz	270	10-11	3360	49	2.3-3.0	14.5	16.6	2000x165x200	2060x200x250
FM-1209A1-2Y	220V 50/60Hz	150	12-13	1820	45	3.0-3.5	10.1	11.4	900x190x225	960x225x275
FM-1210A1-2Y	220V 50/60Hz	170	12-13	2060	45	3.0-3.5	10.7	12.1	1000x190x225	1060x225x275
FM-1212A1-2Y	220V 50/60Hz	210	12-13	2540	46	3.0-3.5	12.8	14.3	1200x190x225	1260x225x275
FM-1215A1-2Y	220V 50/60Hz	240	12-13	3250	47	3.0-3.5	15.7	17.4	1500x190x225	1560x225x275
FM-1218A1-2Y	220V 50/60Hz	280	12-13	3960	48	3.0-3.5	18.6	20.5	1800x190x225	1860x225x275
FM-1220A1-2Y	220V 50/60Hz	320	12-13	4440	50	3.0-3.5	19.1	21.3	2000x190x225	2060x225x275
FM-1509A-2Y	220V 50/60Hz	230	14-15	2130	47	4.5-5.0	12.6	14.0	900x210x255	960x245x305
FM-1510A-2Y	220V 50/60Hz	250	14-15	2450	47	4.5-5.0	13.4	15.0	1000x210x255	1060x245x305
FM-1512A-2Y	220V 50/60Hz	320	14-15	2960	48	4.5-5.0	15.8	17.4	1200x210x255	1260x245x305
FM-1515A-2Y	220V 50/60Hz	370	14-15	3790	50	4.5-5.0	18.6	20.4	1500x210x255	1560x245x305

Air Curtain



Model C	Rated Voltage	Length (mm)	Input Power (w)	Motor Quantity (pc)	Air Speed (m/s)	Air Volume (m³/h)	Mounted High (m)	Noise (db)	N.W (kg)	G.W (kg)	Packing Size (mm)
FM-3509C-2Y	220V 50/60Hz	900	310	2	15-16	1060	3.5-4.0	44	12.3	13.6	960x260x290
FM-3510C-2Y	220V 50/60Hz	1000	310	2	15-16	1060	3.5-4.0	44	13.7	14.1	1060x260x290
FM-3512C-2Y	220V 50/60Hz	1200	390	2	15-16	1440	3.5-4.0	45	14.6	16.2	1260x260x290
FM-3515C-2Y	220V 50/60Hz	1500	510	3	15-16	1800	3.5-4.0	48	18.5	20.3	1560x260x290
FM-3518C-2Y	220V 50/60Hz	1800	590	3	15-16	2320	3.5-4.0	50	20.3	22.5	1860x260x290
FM-4509C-2Y	220V 50/60Hz	900	380	2	18-19	1280	4.0-4.5	47	12.6	13.9	960x260x290
FM-4510C-2Y	220V 50/60Hz	1000	380	2	18-19	1280	4.0-4.5	47	13.0	14.4	1060x260x290
FM-4512C-2Y	220V 50/60Hz	1200	470	2	18-19	1730	4.0-4.5	49	14.9	16.5	1260x260x290
FM-4515C-2Y	220V 50/60Hz	1500	590	3	18-19	2160	4.0-4.5	51	18.9	20.7	1560x260x290
FM-4518C-2Y	220V 50/60Hz	1800	690	3	18-19	2790	4.0-4.5	54	20.7	22.9	1860x260x290
FM-5509C-2Y	220V 50/60Hz	900	470	2	21-22	1520	5.0-5.5	51	12.9	14.2	960x 260x290
FM-5510C-2Y	220V 50/60Hz	1000	470	2	21-22	1520	5.0-5.5	51	13.3	14.7	1060x260x290
FM-5512C-2Y	220V 50/60Hz	1200	610	2	21-22	2030	5.0-5.5	53	15.2	16.8	1260x260x290
FM-5515C-2Y	220V 50/60Hz	1500	770	3	21-22	2550	5.0-5.5	56	19.3	21.1	1560x260x290
FM-5518C-2Y	220V 50/60Hz	1800	965	3	21-22	3050	5.0-5.5	57	21.1	23.3	1860x260x290

Air Curtain



Model D	Rated Voltage	Length (mm)	Input Power (w)	Motor Quantity (pc)	Air Speed (m/s)	Air Volume (m ³ /h)	Mounted High (m)	Noise (db)	N.W (kg)	G.W (kg)	Packing Size (mm)
FM-3509D-2Y	220V 50/60Hz	900	310	2	15-16	1060	3.5-4.0	44	12.3	13.6	960x260x290
FM-3510D-2Y	220V 50/60Hz	1000	310	2	15-16	1060	3.5-4.0	44	13.7	14.1	1060x260x290
FM-3512D-2Y	220V 50/60Hz	1200	390	2	15-16	1440	3.5-4.0	45	14.6	16.2	1260x260x290
FM-3515D-2Y	220V 50/60Hz	1500	510	3	15-16	1800	3.5-4.0	48	18.5	20.3	1560x260x290
FM-3518D-2Y	220V 50/60Hz	1800	590	3	15-16	2320	3.5-4.0	50	20.3	22.5	1860x260x290
FM-4509D-2Y	220V 50/60Hz	900	380	2	18-19	1280	4.0-4.5	47	12.6	13.9	960x260x290
FM-4510D-2Y	220V 50/60Hz	1000	380	2	18-19	1280	4.0-4.5	47	13.0	14.4	1060x260x290
FM-4512D-2Y	220V 50/60Hz	1200	470	2	18-19	1730	4.0-4.5	49	14.9	16.5	1260x260x290
FM-4515D-2Y	220V 50/60Hz	1500	590	3	18-19	2160	4.0-4.5	51	18.9	20.7	1560x260x290
FM-4518D-2Y	220V 50/60Hz	1800	690	3	18-19	2790	4.0-4.5	54	20.7	22.9	1860x260x290
FM-5509D-2Y	220V 50/60Hz	900	470	2	21-22	1520	5.0-5.5	51	12.9	14.2	960x 260x290
FM-5510D-2Y	220V 50/60Hz	1000	470	2	21-22	1520	5.0-5.5	51	13.3	14.7	1060x260x290
FM-5512D-2Y	220V 50/60Hz	1200	610	2	21-22	2030	5.0-5.5	53	15.2	16.8	1260x260x290
FM-5515D-2Y	220V 50/60Hz	1500	770	3	21-22	2550	5.0-5.5	56	19.3	21.1	1560x260x290
FM-5518D-2Y	220V 50/60Hz	1800	965	3	21-22	3050	5.0-5.5	57	21.1	23.3	1860x260x290

Air Curtain



Model T	Rated Voltage	Length (mm)	Input Power (w)	Air Speed (m/s)	Air Volume (m ³ /h)	Mounted High (m)	Noise (db)	N.W (kg)	G.W (kg)	Packing Size (mm)
FM-1209T-2Y	220V 50/60Hz	900	115	10-11	1380	2.3-3.0	44	7.2	8.2	940x210x230
FM-1210T-2Y	220V 50/60Hz	1000	135	10-11	1540	2.3-3.0	44	7.6	8.6	1040x210x230
FM-1212T-2Y	220V 50/60Hz	1200	160	10-11	1860	2.3-3.0	45	8.8	10.0	1240x210x230
FM-1215T-2Y	220V 50/60Hz	1500	200	10-11	2350	2.3-3.0	46	10.6	12.0	1540x210x230
FM-1218T-2Y	220V 50/60Hz	1800	230	10-11	3000	2.3-3.0	48	12.4	14.0	1840x210x230
FM-1220T-2Y	220V 50/60Hz	2000	270	10-11	3360	2.3-3.0	50	14.2	16.0	2040x210x230
FM-1209T1-2Y	220V 50/60Hz	900	150	12-13	1420	3.0-3.5	47	9.0	10.0	950x240x220
FM-1210T1-2Y	220V 50/60Hz	1000	170	12-13	1660	3.0-3.5	47	9.5	10.6	1050x240x220
FM-1212T1-2Y	220V 50/60Hz	1200	210	12-13	1960	3.0-3.5	49	10.7	12.0	1250x240x220
FM-1215T1-2Y	220V 50/60Hz	1500	240	12-13	2580	3.0-3.5	51	12.4	14.0	1550x240x220
FM-1218T1-2Y	220V 50/60Hz	1800	280	12-13	3300	3.0-3.5	53	15.0	17.0	1850x240x220
FM-1220T1-2Y	220V 50/60Hz	2000	320	12-13	3720	3.0-3.5	55	15.8	18.0	2050x240x220

Hand Tools



Vacuum Pump, Recovery Machine



Manifold, Gauge And Charging Hose



Valve Series



Control And Connector



Copper Tube



Brass Fitting



Copper Fitting



Access Valve , Filter Drier , Accumulator



Universal Remote Control



Fan And Motor




12380 17250 YWF YWF YZF YDK110 MF

Filter Drier, Oil Management



CA CB CC CEK CK CQ

Wire Tube Condenser & Roll Bond Evaporator

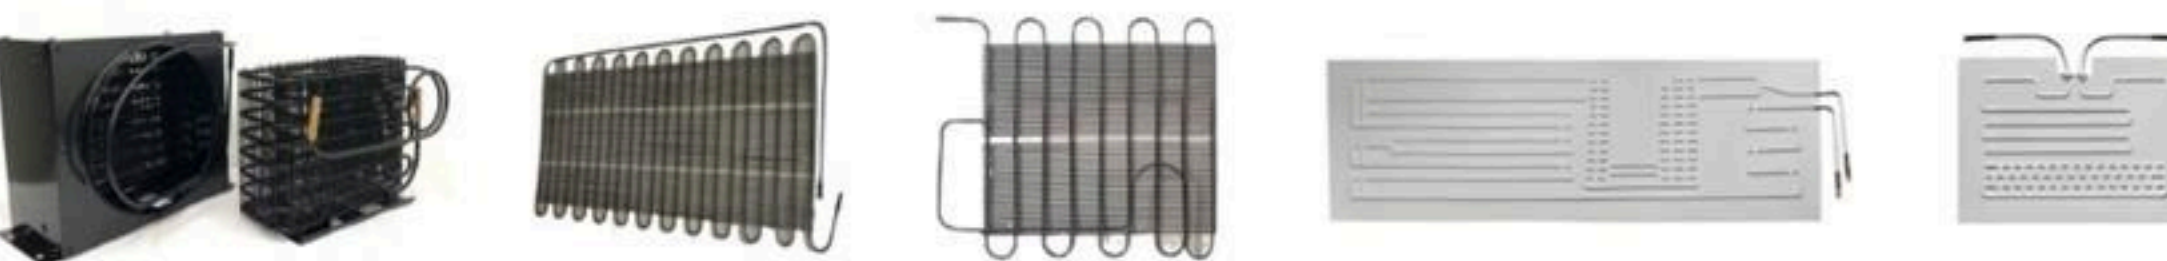

Capacitor



CBB65-1 CBB60 CBB61 CBB65-2 SPP

Compressor, Refrigeration Oil



Refrigerant Gas



R22 R134a R32 R404A R23 134a

Temperature Controller



TPM30 HTC-2 TPM900 WT-1 STC-201 STC-110A STC-8080 STC-300

Clamp Meter, Multimeter




DT33D DT830B WH5000 DT266 DT201 DT3222F MT87 WH550

Latch And Hinge



1178 1400 1460 1332 1132 1100

Line Set Cover, Cladding

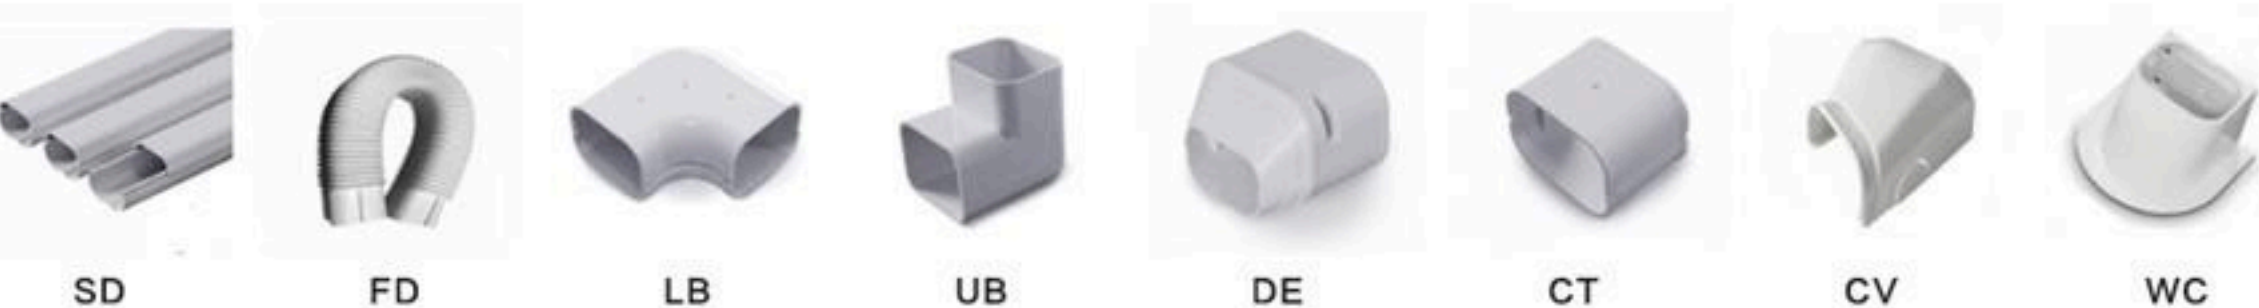

SD FD LB UB DE CT CV WC

AC Bracket



Titanium Evaporator



Air Cooler



CFC CFD