

SEERVI TRADING

DAMPING HINGE SYSTEM

Product Catalogue

Furniture & Door Hardware

2026

MICRO ENGINE DAMPING HINGE


全新上市 | 平开门 | 铝门 | 木门

双阻尼 | 可调阻尼 | 滑槽



— 让每一次开关 · 都轻柔无声 —

好五金 中式阻尼合页 VS 传统 一体式液压合页
HAOWU CUSHION DAMPING HINGE VS TRADITIONAL ONE-PIECE HYDRAULIC HINGE

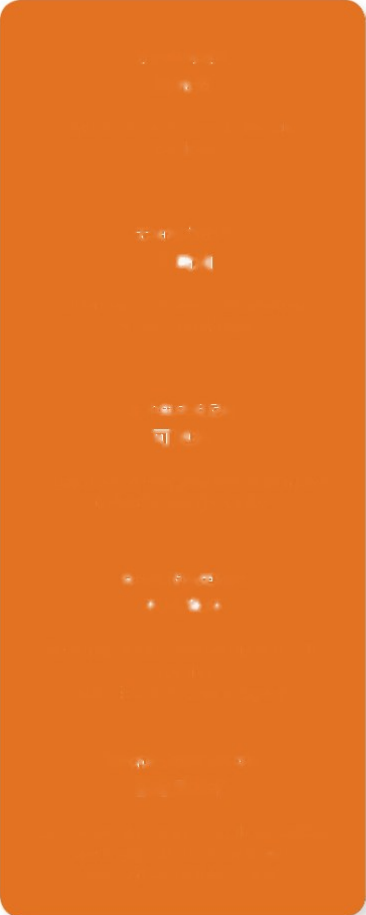	一体结构连动 损耗高 One-piece structure linkage High loss 充油动力腔体 有漏油隐患 Oil-filled power chamber There's an oil leak 通用液压缓冲系统 不可更换 Universal hydraulic buffer system irreplaceable 滑杆式传动结构复杂 磨损大 Complex Sliding Rod Drive Structure Heavy Damaged 动力和换系统不可拆卸 售后成本高 Power and shift systems are not removable High after-sales costs
--	---

SEERVI TRADING



分体缓冲铰链

滑珠式传动轴，滑动更轻盈
大大减低不简单磨损，合页更耐用


Split Linkage Structure
Sliding ball drive shaft, sliding more lightweight
Greatly reduce uncomplicated wear and tear, more durable hinges.



好屋分体阻尼合页

动力腔体内无须压注液压油，
好屋分体阻尼合页
彻底实现了缓冲合页永不漏油的突破

Never oil leakage
Because the power chamber has no oil at all

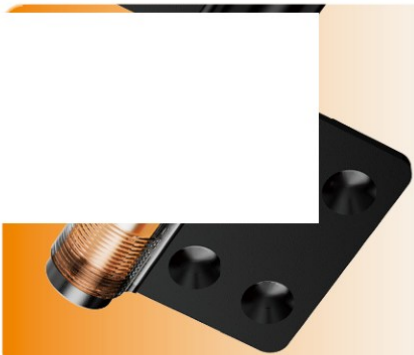

革命性缓冲集成式阻尼器

功能更强大
阻尼力值全检测，品质更稳定

Revolutionary cushion integrated damper
More powerful function
Damping force value full inspection monitoring, more stable quality

— 让每一次开关，都轻柔无声 —



DUAL DAMPING
STRUCTURE

双缓冲结构

好屋缓冲式阻尼合页由于阻尼器等零部件可轻松拆换，普通人都能按照指引快速处理，所以根本不需要专业的技术人员上门维修，更不需要更换整个合页，所以售后成本非常低。

Good House Split Damping Hinge can be easily removed and replaced due to the fact that the damper and other parts can be easily removed and replaced, and any ordinary person can quickly deal with it according to the guidelines.
So there is no need for professional technicians to come to the house for maintenance.
There is no need to replace the entire hinge, so the after-sales cost is very low.

SEERVI TRADING



致力于
让您的生活静下来

— · —
LIFE ABHORS NOISE
communication
Silent hinge



PRODUCT
CATALOG
—
产品型录



Make every
switch
Softly and
silently

让每一次开关，都轻柔无声

Index 产品索引 -

Part	- 4 寸阻尼合页系列 Aluminum frame door 4 inch damping hinge series	P 13-18
Part	- 5 寸阻尼合页系列 Wooden door 5 inch damping hinge series	P 19-30
Part	- 6 寸阻尼合页系列 Aluminum frame door 6 inch damping hinge series	P 31-40
Part	- 断桥阻尼合页系列 Damping hinge series	P 41-44
Part	- 中 / 偏轴门五金系统 Off-center / offset door hardware system	P 45-54
Part	- 备忘录 Memorandum book	P 55-58

SEERVI TRADING






合页颜色 Hinge color:



装饰盖 Decorative cover



哑黑 Hoarse Black 烟枪灰 Bong ash 砂金 Placer Gold 砂银 Placer Gold 陶瓷白 Haoyue Gold

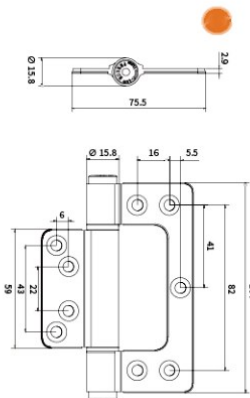

	104x75.5X15.8mm
	≤ 100kg
	320g/ 片
	太空铝 Space aluminum
	免开槽 no-slotting required
	开合 10 万次 Open and close 100,000 times
	-30°C ~60°C
	铝门、铝木门等 Aluminum doors, aluminum and wood doors
	自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
	弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly



承重 30kg



承重 50kg



承重 80kg



铝框门阻尼合页系列 (旗型)
FLAG SHAPED ALUMINUM DOOR HYDRAULIC HINGE

合页颜色 Hinge color:




哑黑 Hoarse Black 烟枪灰 Bong ash 砂金 Placer Gold 砂银 Placer Gold 陶瓷白 Haoyue Gold

装饰盖 Decorative cover



哑黑 Hoarse Black 烟枪灰 Bong ash 砂金 Placer Gold 砂银 Placer Gold 陶瓷白 Haoyue Gold

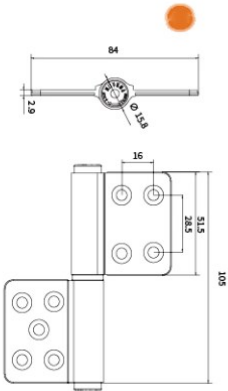

105x84X15.8mm
≤ 100kg
310g/ 片
太空铝 Space aluminum
免开槽 no-slotting required
开合 10 万次 Open and close 100,000 times
-30°C ~60°C
铝门、铝木门等 Aluminum doors, aluminum and wood doors
自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly



SEERVI TRADING





合页颜色 Hinge color:




砂金 Placer Gold



哑黑 Hoarse Black




烟枪灰 Bong ash



砂銀 Placer Gold



陶瓷白 Haoyue Gold

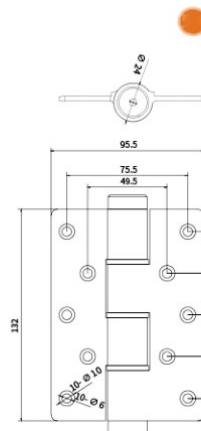

	132X95.5X24mm
	≤ 100kg
	400g/ 片
	太空铝 Space aluminum
	长 Length:133mm、宽 Width:35mm、深 Depth:4mm
	不分左右 Not distinguishing right and left
	开合 10 万次 Open and close 100,000 times
	-30℃ ~60℃
	铝门、铝木门等 Aluminum doors, aluminum and wood doors
	自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
	弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly



承重 50kg



承重 80kg



承重 100kg



承重 150kg





木门阻尼合页系列 (E 型)
E SERIES WOODEN DOOR HINGE

合页颜色 Hinge color:




砂金 Placer Gold



哑黑 Hoarse Black




烟枪灰 Bong ash



砂银 Placer Gold



陶瓷白 Haoyue Gold

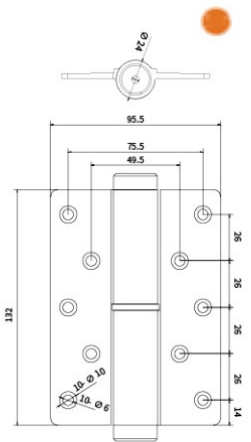

132X95.5X24mm
≤ 100kg
400g/ 片
太空铝 Space aluminum
长 Length:133mm、宽 Width:35mm、深 Depth:4mm
不分左右 Not distinguishing right and left
开合 10 万次 Open and close 100,000 times
-30°C ~60°C
铝门、铝木门等 Aluminum doors, aluminum and wood doors
自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly



承重 50kg



承重 80kg



承重 100kg



承重 150kg

SEERVI TRADING

让门一次开关，都轻柔无声



木门阻尼合页系列 (子母)
BUTTERFLY SERIES WOODEN DOOR HYDRAULIC HINGE

合页颜色 Hinge color:



砂金 Placer Gold



哑黑 Hoarse Black




烟枪灰 Bong ash



砂银 Placer Gold



陶瓷白 Haoyue Gold

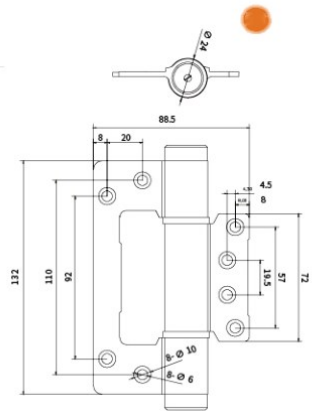

	132X88.5X24mm
	≤ 100kg
	400g/ 片
	太空铝 Space aluminum
	免开槽 no-slotting required
	分左右 Distinguishing right and left
	开合 10 万次 Open and close 100,000 times
	-30°C -60°C
	铝门、铝木门等 Aluminum doors, aluminum and wood doors
	自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
	弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly





木门阻尼合页系列（旗型）
SEMAPHORE SERIES WOODEN DOOR HYDRAULIC HINGE

合页颜色 Hinge color:



砂金 Placer Gold



哑黑 Hoarse Black




烟枪灰 Bong ash



砂银 Placer Gold



陶瓷白 Haoyue Gold

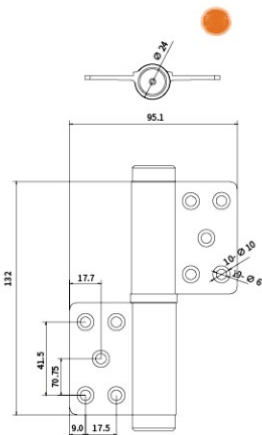

132X95.1X24mm
≤ 100kg
400g/ 片
太空铝 Space aluminum
免开槽 no-slotting required
分左右 Distinguishing right and left
开合 10 万次 Open and close 100,000 times
-30°C -60°C
铝门、铝木门等 Aluminum doors, aluminum and wood doors
自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly



承重 50kg



承重 80kg



承重 100kg



承重 150kg

wooden door
6-inch damping hinge series





木门阻尼合页系列 (E 型)
E SERIES WOODEN DOOR HINGE

合页颜色 Hinge color:



砂金 Placer Gold



哑黑 Hoarse Black




烟枪灰 Bong ash




砂银 Placer Gold



陶瓷白 Haoyue Gold

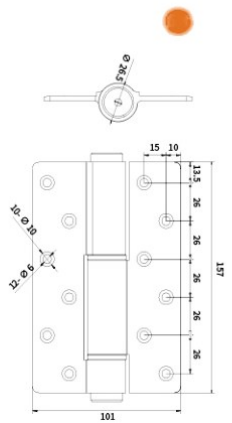

	157X101X26.5mm
	≤ 100kg
	400g/ 片
	太空铝 Space aluminum
	长 Length:158mm、宽 Width:37mm、深 Depth:4mm
	不分左右 Not distinguishing right and left
	开合 10 万次 Open and close 100,000 times
	-30°C ~60°C
	铝门、铝木门等 Aluminum doors, aluminum and wood doors
	自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
	弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly

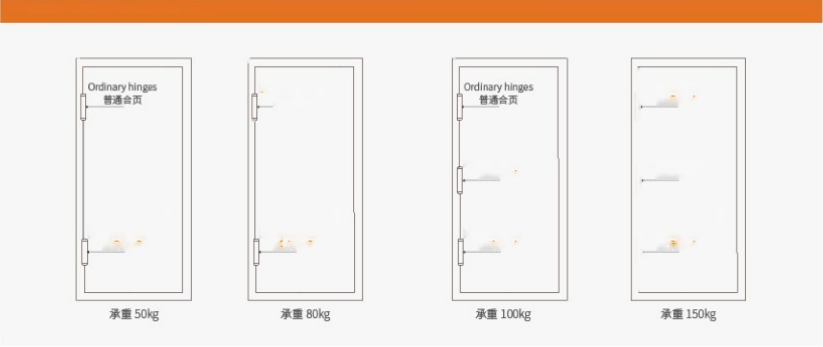



合页颜色 Hinge color:



砂金 Placer Gold



哑黑 Hoarse Black




烟枪灰 Bong ash



砂銀 Placer Gold



陶瓷白 Haoyue Gold

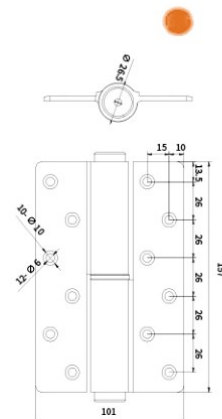

	157X101X26.5mm
	≤ 100kg
	400g/ 片
	太空铝 Space aluminum
	长 Length:158mm、宽 Width:37mm、深 Depth:4mm
	不分左右 Not distinguishing right and left
	开合 10 万次 Open and close 100,000 times
	-30°C ~60°C
	铝门、铝木门等 Aluminum doors, aluminum and wood doors
	自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
	弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly



承重 50kg



承重 80kg



承重 100kg



承重 150kg




合页颜色 Hinge color:



烟枪灰 Bong ash




陶瓷白 Haoyue Gold

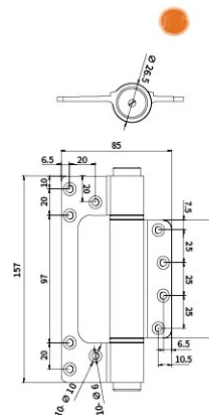

	157X85x26.5mm
	≤ 100kg
	400g/ 片
	太空铝 Space aluminum
	免开槽 no-slotting required
	分左右 Distinguishing right and left
	开合 10 万次 Open and close 100,000 times
	-30°C ~60°C
	铝门、铝木门等 Aluminum doors, aluminum and wood doors
	自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
	弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly



承重 150kg

40 HOW —



Aluminum door
Damping hinge series





断桥阻尼合页系列 (断桥铝)
DAMPING HINGE SERIES(BROKEN ALUMINUM)

合页颜色 Hinge color:



砂金 Placer Gold



哑黑 Hoarse Black




烟枪灰 Bong ash




砂银 Placer Gold



陶瓷白 Haoyue Gold

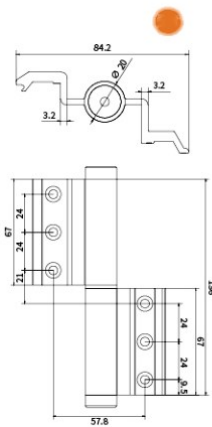

	136X84.2X20mm
	≤ 100kg
	400g/ 片
	太空铝 Space aluminum
	免开槽 no-slotting required
	不分左右 Not distinguishing right and left
	开合 10 万次 Open and close 100,000 times
	-30°C ~60°C
	铝门、铝木门等 Aluminum doors, aluminum and wood doors
	自动闭门、自拟缓冲、定位、防风、静音入锁等 Automatic door closing, self-proposed buffer, positioning, windproof, mute into the lock, etc.
	弹簧、阻尼器可更换、耐用环保 Replaceable springs and dampers, durable and environmentally friendly

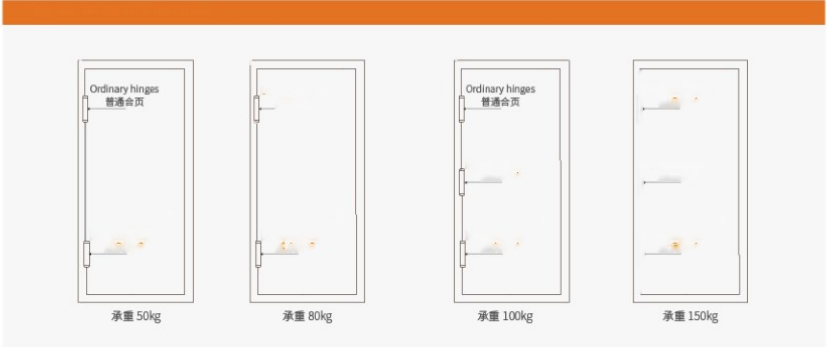

SEERVI TRADING







中轴门五金系统
CENTER PIVOT DOOR HARDWARE SYSTEM



304 不锈钢饰面
钢质主体
二维可调底座
锻造轴承钢
凸轮转轴
两个力矩调节阀
90°带定位功能

304 stainless steel finish
Steel body
Two-dimensional adjustable base
Calcined bearing steel
Cam spindle
Two torque regulating valves
90° with positioning

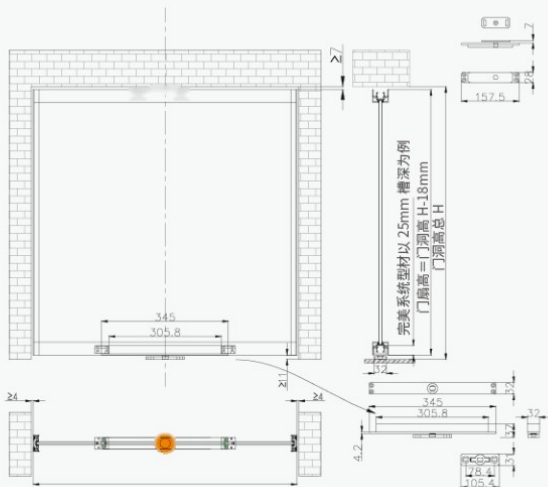

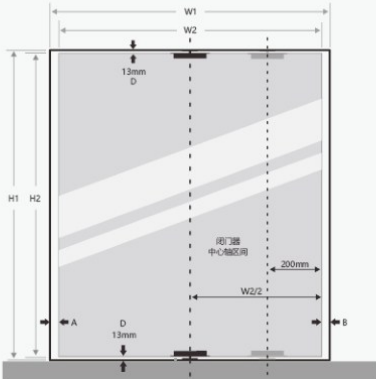


门洞内侧宽度:W1
门洞内侧高度:H1
门体宽度:W2
门体高度:H2
门体重量:M2
门体厚度:T2

H2=H1-26mm
W2=W1-10mm
W2 ≤ 2000mm
M2 ≤ 150kg
T2=40-60mm


L1(mm)	A=B(mm)	
200~W2/2	5	55
T (mm)	40	50 60

▲表2-1

门体上下边展开尺寸 (mm)




注: 门体上方闭门器与门体下方的闭门器同轴心。

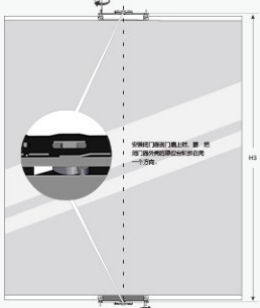


调节箭头指向 M6x5 使用门框达到合适的位置, 确保 H1-H3>2mm(便于安装用的门体进入门洞)


安装辅助工具放置在门洞内侧顶部, 对准激光线, 在安装辅助工具后侧画线作标记

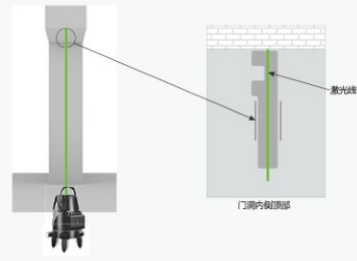


门洞内侧顶部安装辅助工具的三角形孔对准激光线 (激光水平仪如图放置) 四个大圆孔做标记

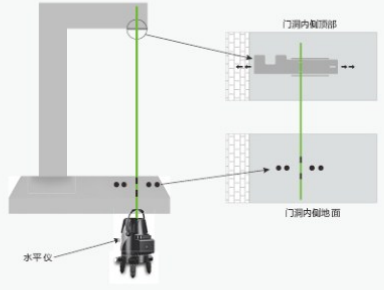


用钻头在标记位置打直径 8 的孔, 把胶粒塞到孔内 (若门洞顶是木板, 不用打孔)

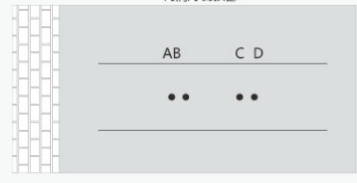


门洞内侧顶部

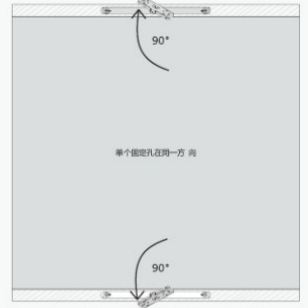

把门体上下端 150KG 闭门器按同一个方向旋转 90°

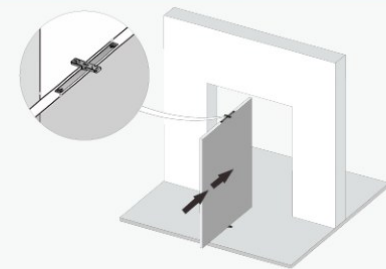

将底板旋转好的门体放置在门洞中

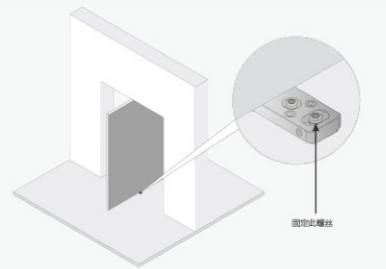

将 150KG 闭门器系统底部孔位与地面的安装孔位置量, 然后固定螺丝

— 让每一次开关，都轻柔无声 —







偏轴门五金系统
OFFSET DOOR HARDWARE SYSTEMS



304 不锈钢饰面
钢质主体
二维可调底座
锻造轴承钢
凸轮转轴
两个力矩调节阀
90°带定位功能

304 stainless steel finish
Steel body
Two-dimensional adjustable base
Calcined bearing steel
Cam spindle
Two torque regulating valves
90° with positioning

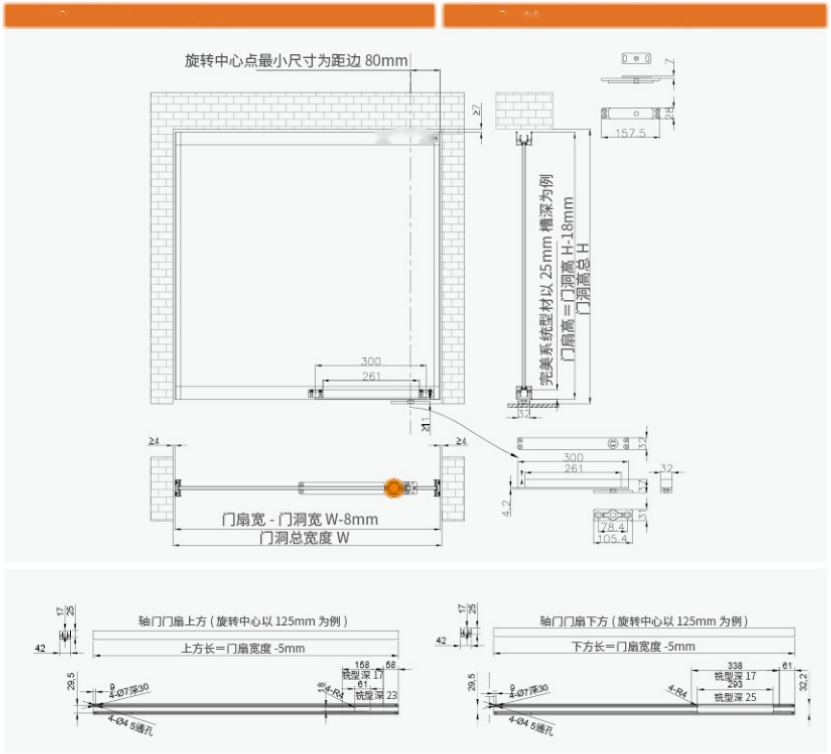


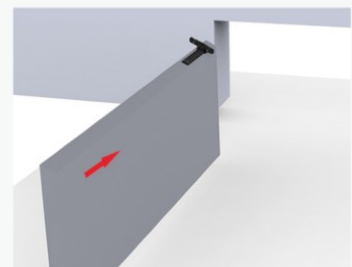

Damping Buffer Hinge User Manual

Product Introduction:

This product is an exclusively independently developed patented product, integrating the four-in-one functions of door closer, hinge, door stopper and door holder. It adopts a detachable structural design, allowing its core components to be replaced at any time, ensuring no worries about after-sales service. The product is suitable for various door types and features a lightweight and fashionable appearance.

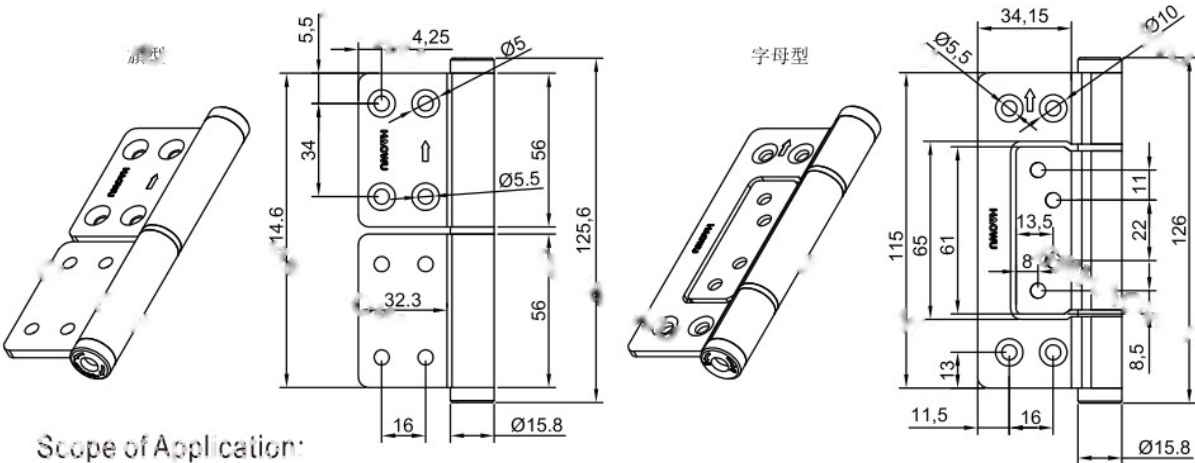



Scope of Application:

This product is suitable for various wooden doors, aluminum-framed doors and other door types. Please refer to the figure below for the hinge usage parameters.

Door Weigh	Dimensions	Quantity	Note
≤20kg	≤2200mmX1000mm	2 Damping + 1 Load-bearing	
≤35kg	≤2500mmX1000mm	2 Damping + 1 Load-bearing	
≤50kg	≤3000mmX1000mm	3 Damping	
≤65kg	≤3200mmX1000mm	4 Damping	
For non-standard sizes, the number of hinges can be appropriately increased proportionally.			





Installation location:

Both flag-type and letter-type hinges require no grooving and no drilling. For the selection of product quantity and installation position, please refer to the figure below.

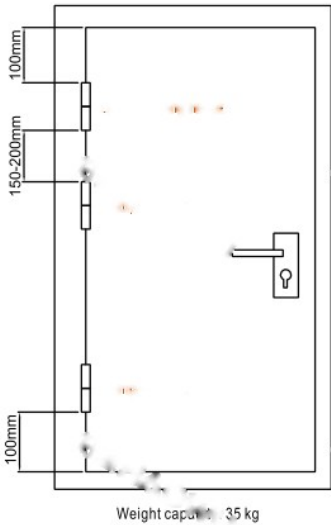
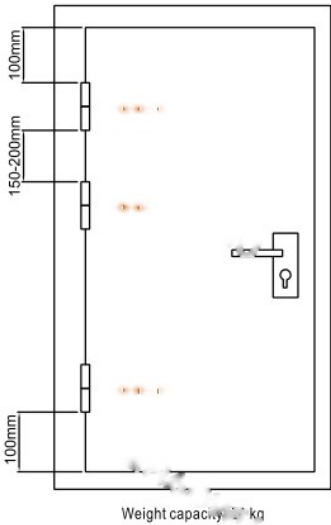


SEERVI TRADING

on the door, position the hinge facing the side with the arrow. Align the
 rotate the top and bottom hinges to 90 degrees before installation, as
 may cause misalignment between the top and bottom hinges, affecting
 door closure. After alignment, secure with self-tapping screws, adjust the closing force, and the door
 ready for use

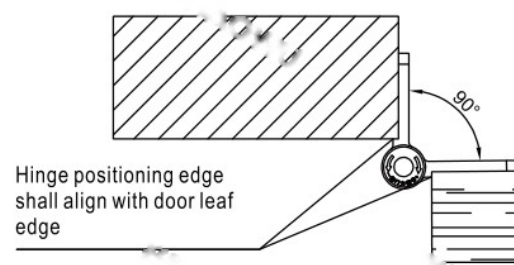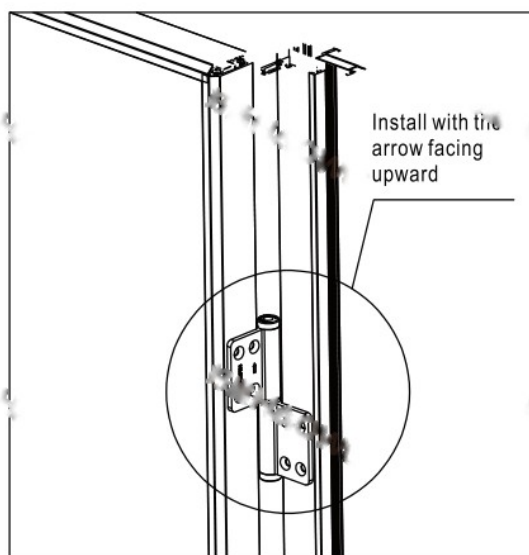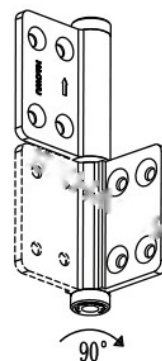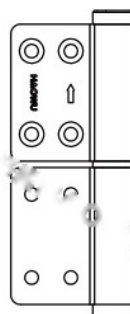

Step 2: After alignment, install self-tapping screws or rivets directly. Please refer to the figure below for details.

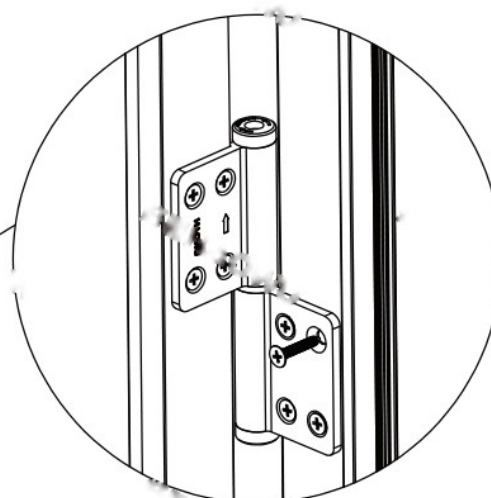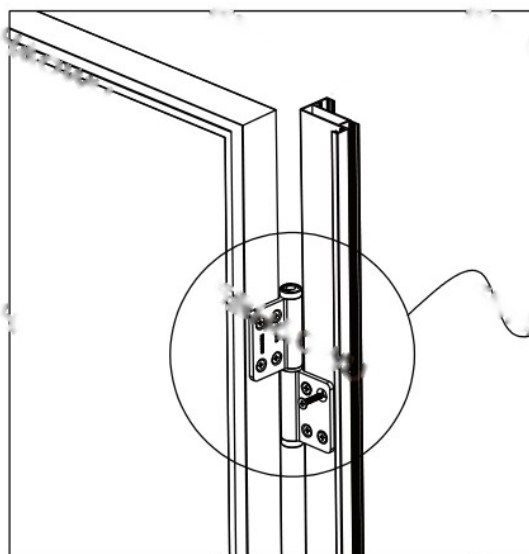


Note: Tighten the eight matching self-tapping screws or rivets until secure.


SEERVI TRADING

Adjustment To adjust the door-closing force, do so when the door is closed. Turn 2-3 circles towards the "+" direction (depth approximately 2-4mm), and gradually increase. Adjust until the door can close smoothly. To achieve the best effect, the door-closing force of all hinges on the same door must be consistent. Please refer to the figure below for details.

Step 4: Mute and Locking Function Adjustment The factory default setting is mute function (single-stage force). Use the supplied hex key to turn 1-2 circles towards the "Lock" direction to switch to the locking state. Conversely, turn 1-2 circles towards the "Mute" direction to switch back to the mute function. To achieve the ideal functional effect, the functions of all hinges on the same door must be set to be consistent. Please refer to the figure below for details.

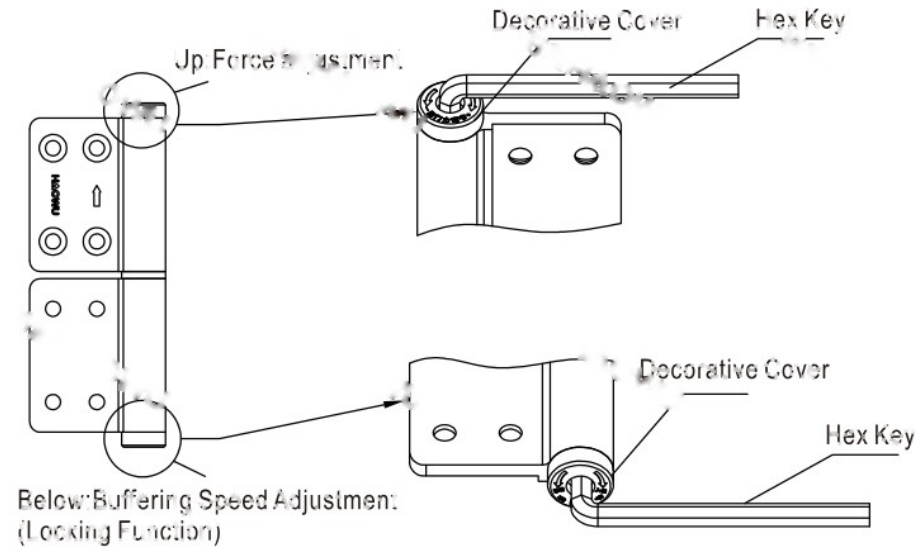

Function Adjustment:
Hinge Function Angle Diagram

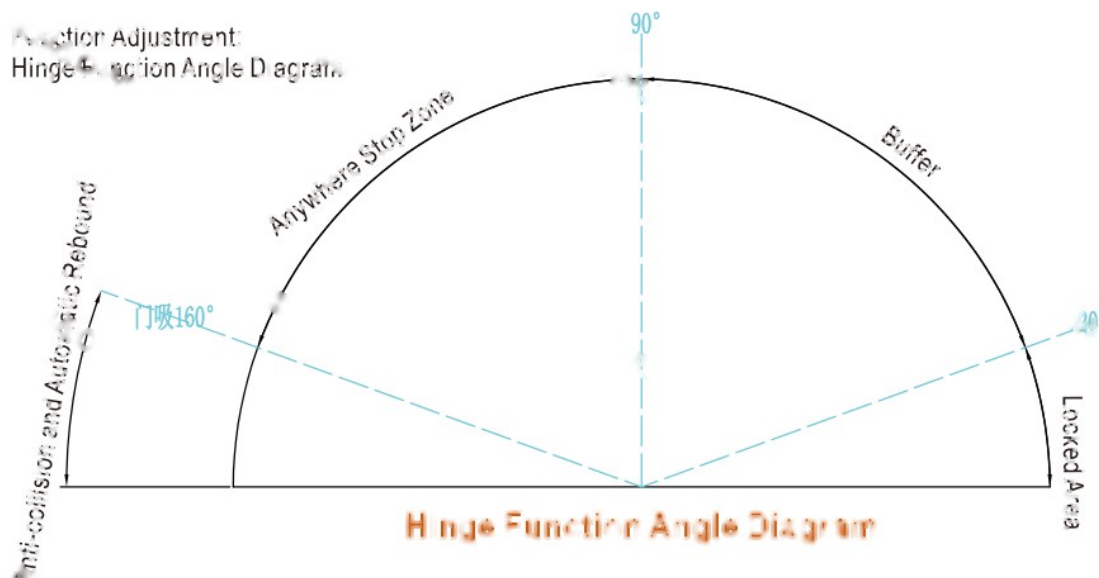

Note: The Hinge Function Angle Diagram is for reference only regarding the effect. There may be slight differences between the actual use and the diagram.

- with sharp or hard objects. Clean it with a damp cloth, or a damp cloth not or cleaner, then dry it with a dry cloth.
- 1.2 Apply lubricating oil regularly to the thrust ball bearing on the hinge housing to keep it bright, lubricated, smooth in operation and free of abnormal noise.
- 1.3 Apply an appropriate amount of lubricating oil to the hinge's inner cavity at least once a year. This ensures smooth operation of the internal mechanism, no abnormal noise, and can also extend the service life of the hinge. (This operation requires removing the damper or spring first; please refer to 2.1/2.2 below for specific operations.)
- 1.4 Do not impact or strike the product with hard objects, as this may cause poor operation, failure to close the door, and abnormal noise.


2 Repair

Failure to close and lock properly or the door leaf not fully closed	1. When the damper and spring are not installed, there is obvious rebound during door closing. If rebound occurs, it is necessary to reinstall and adjust to keep all hinges as coaxial as possible.
	2. Insufficient door closing force: Please use the supplied hex key to increase the door closing force. If the adjusting cap is turned to a deep position but still fails to close the door and lock properly, please refer to 2.1 to replace the spring.
	3. Check whether the door can close and lock properly without the damper installed. If it can, please replace the damper. (Please refer to 2.2 for specific operations.)
No obvious buffering and impact noise during door closing	1. Please replace the damper. (Please refer to 2.2 for specific operations.)
Obvious Abnormal Noise	1. It is necessary to reinstall and adjust to keep all hinges as coaxial as possible.
	2. Remove the spring and apply an appropriate amount of lubricating oil to it.

2.1 Spring Replacement

After the product exceeds its service life, the door-closing force will gradually decrease. If the door fails to close properly, you may contact the manufacturer to replace the spring after evaluation, which will restore the product to its original performance.

Steps are as follows: Must be performed when the door is closed. Use the supplied hex key to turn the "+" direction until the adjustment cap pushes out the decorative cover. Remove the old spring, install the new one, and readjust the door-closing force. See the figure below for details.

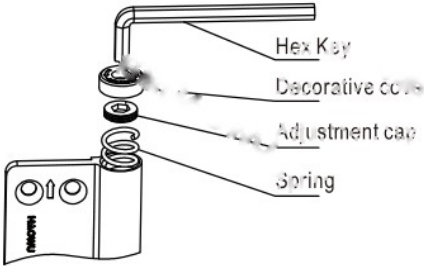

2.2 Damper Replacement

After the product exceeds its service life, if the damping force gradually decreases and fails to provide buffering, you may contact the manufacturer to replace the damper after evaluation, which will restore the product to its original performance.

Steps are as follows: Must be performed when the door is open. Use the supplied hex key to turn the square knob in the "+" direction until the adjusting cap pushes out the decorative cover. Remove the old damper and install the new one. See the figure below for details.

