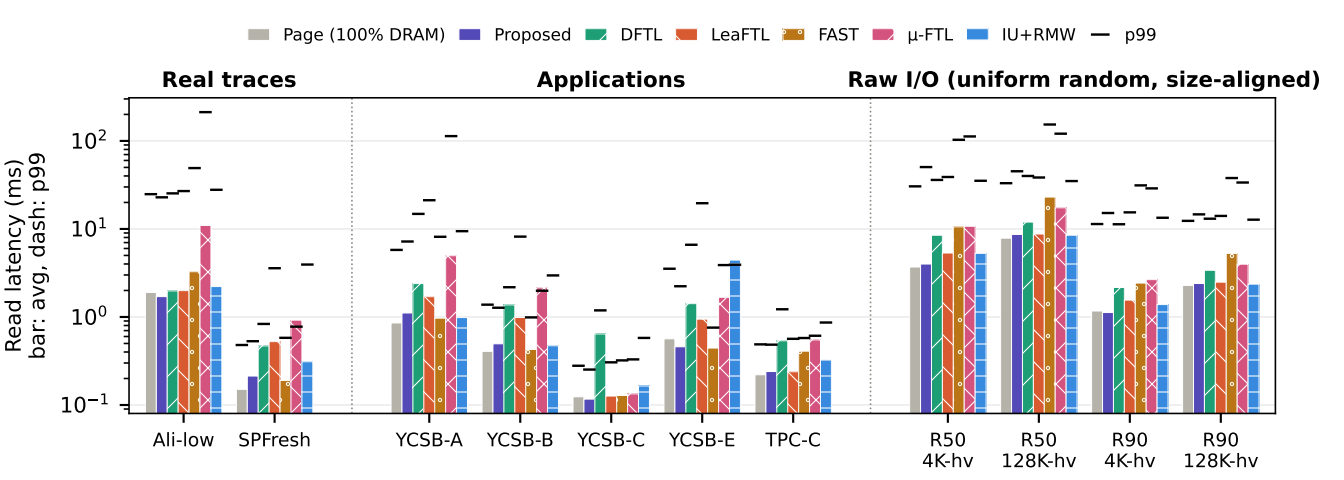
Page (100% DRAM)
Proposed
DFTL
LeaFTL
FAST
µ-FTL
IU+RMW
p99
Real traces
Applications
Raw I/O (uniform random, size-aligned)
Read latency (ms)
bar: avg, dash: p99
10^2
10^1
10^0
10^{-1}
Ali-low
SPFresh
YCSB-A
YCSB-B
YCSB-C
YCSB-E
TPC-C
R50 4K-hv
R50 128K-hv
R90 4K-hv
R90 128K-hv