

# **OMJK**

## SporskifteDriver\_002




- Size: 140mm x 55mm
  - 55 pin: 55 x 2,54mm = 139,70mm
  - 22 pin: 43 x 1.27mm = 54,61mm
  - 22 pin : 22 x 0,635mm = mm
- Hulafstand
  - Vandret: 53 x 2,54mm = 134,62mm
  - Lodret: 12 x 2,54mm = 30,48mm
  - Offset: 2,54mm + (3 \* 0,635mm) = 4,445mm
- Brass Not HulSize:
  - M334,2 = 3,9mm

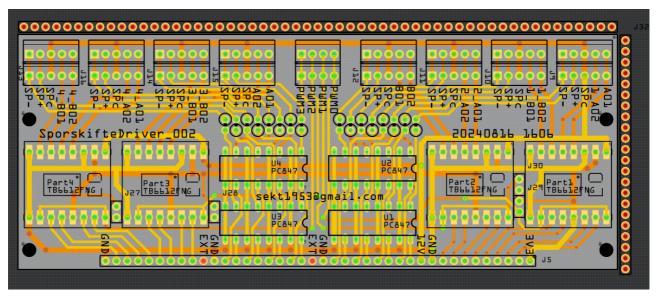


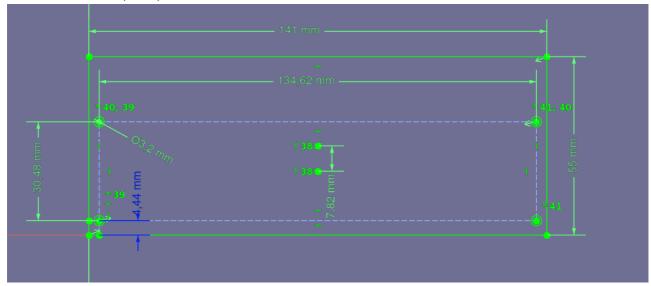


## MCP23017\_300

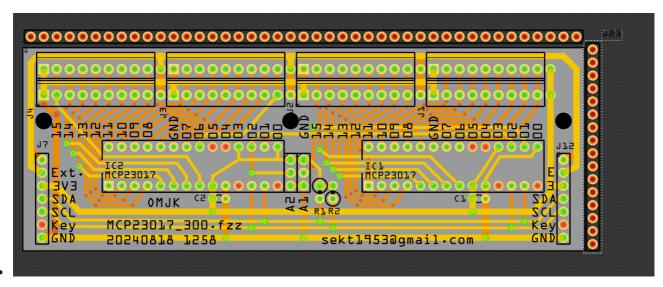


- Size: 110mm x 40mm
  - 43 pin: 43 x 2,54mm = 109,22mm
  - 16 pin: 31 x 1,27mm = 39,37mm
- Hulafstand
  - Vandret: 40 x 2,54mm = 48,26mm
  - Vandret: 40 x 2,54mm = 101,6mm
  - Offset: 9 x 2,54mm = 22,86mmm -> 10 x 2,54mm = 25,4mmm
- Brass Not HulSize:
  - M3*3*4,2 = 3,9mm

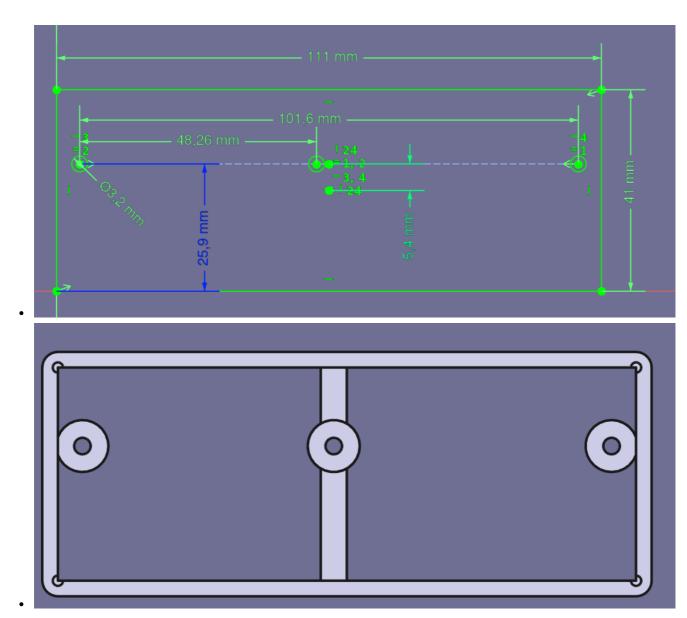


ESP32-PoE-ISO

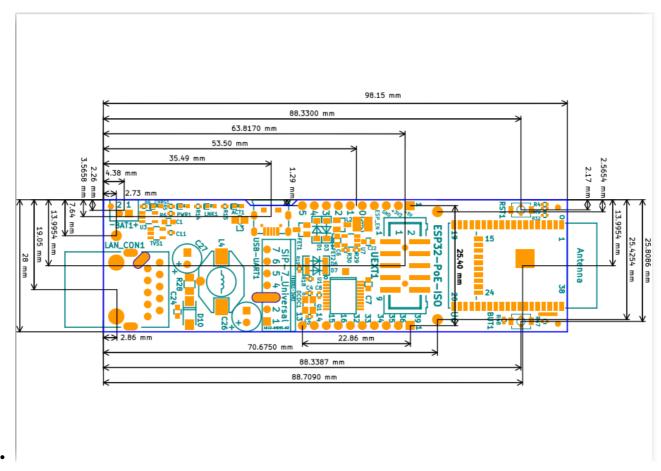



- Size: 98,15mm x 28mm
- Brass Not HulSize:
  - M2*3*3,5 = 3,2mm

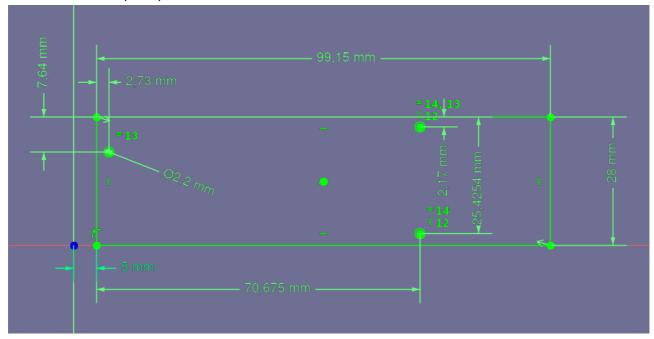

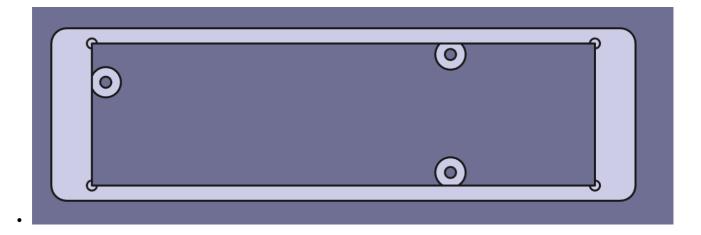



## ESP32-PoE

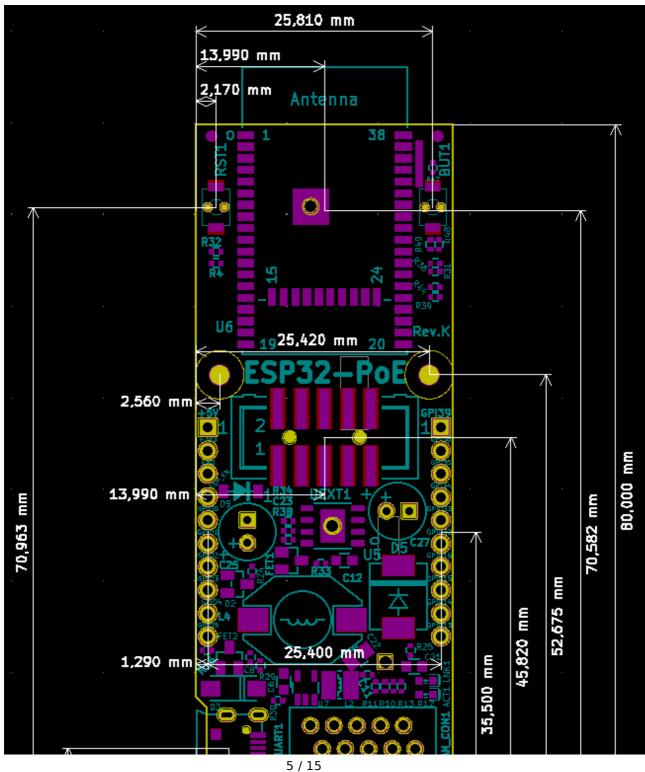

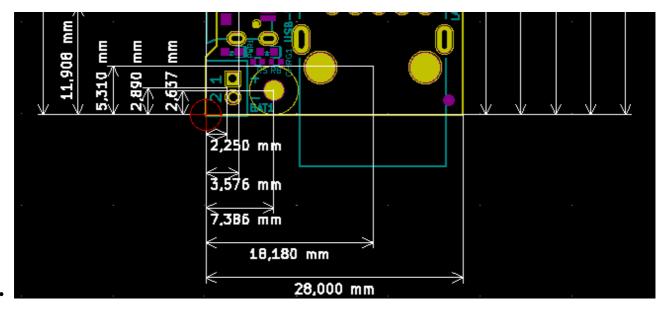


- Size: 80mm x 28mm
- Brass Not HulSize:
  - M2*3*3,5 = 3,2mm

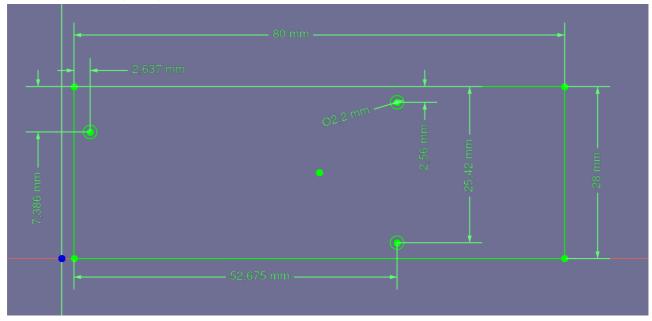


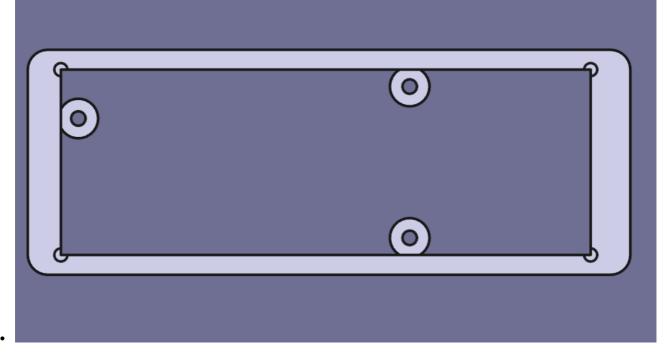



# BodyTest

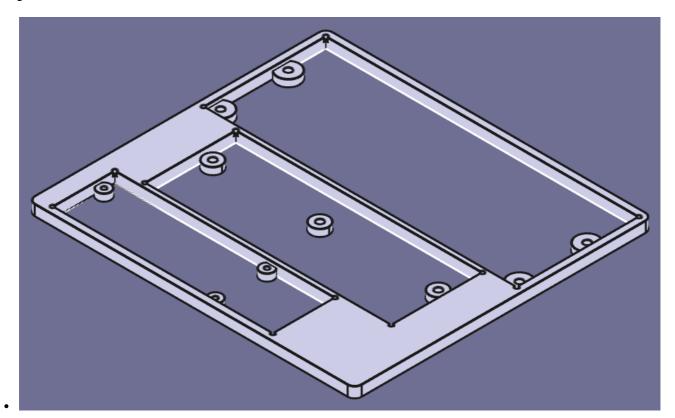



- o Offset:
  - SporskifteDriber -> MCP23017:
    - 16,5mm x 2mm
  - MCP23017 -> ESP32-PoE-Iso:
    - 2mm

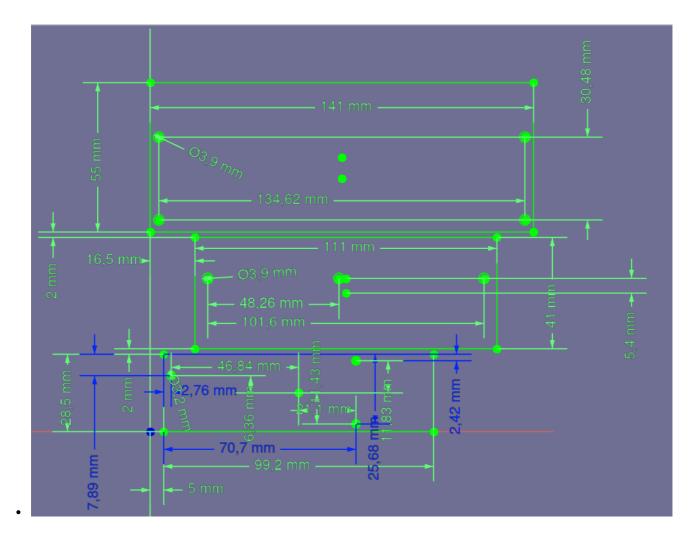


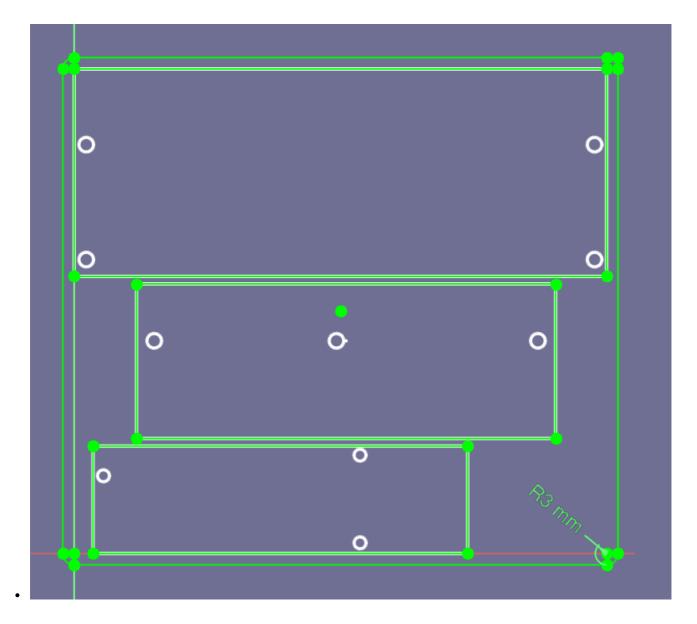

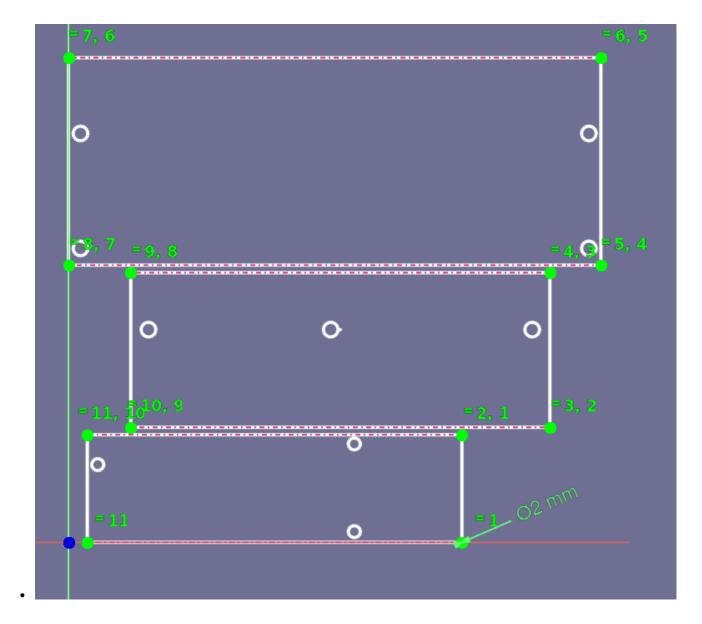


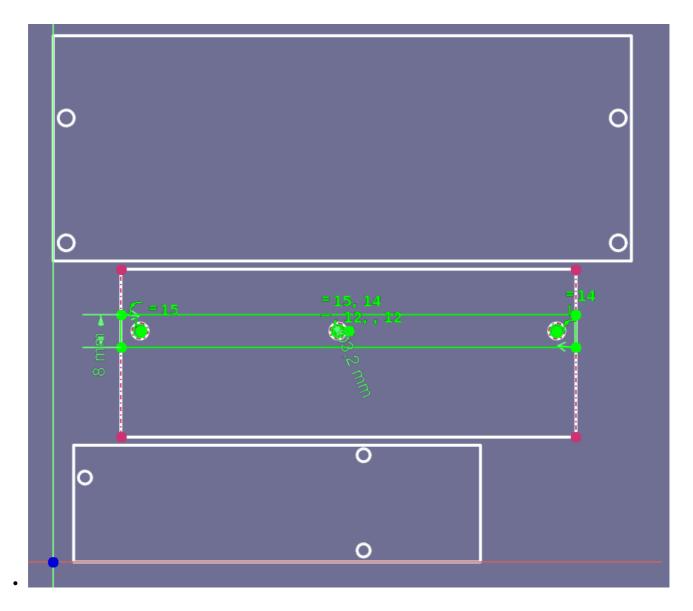


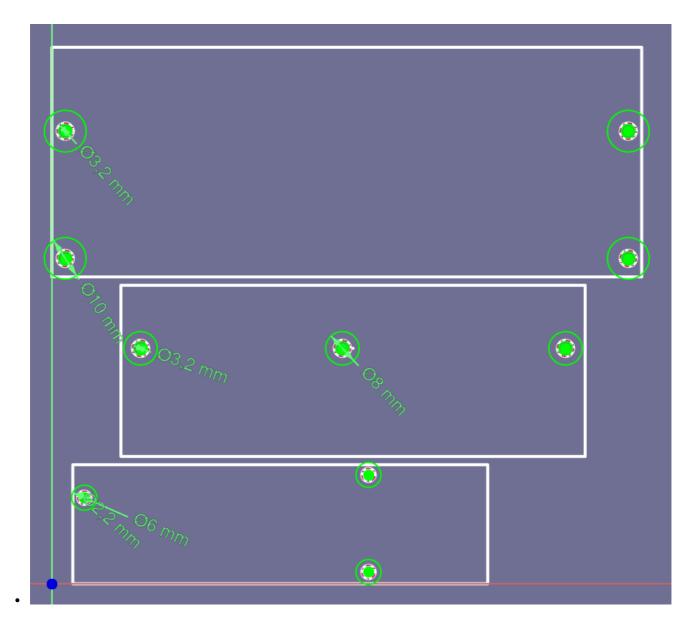

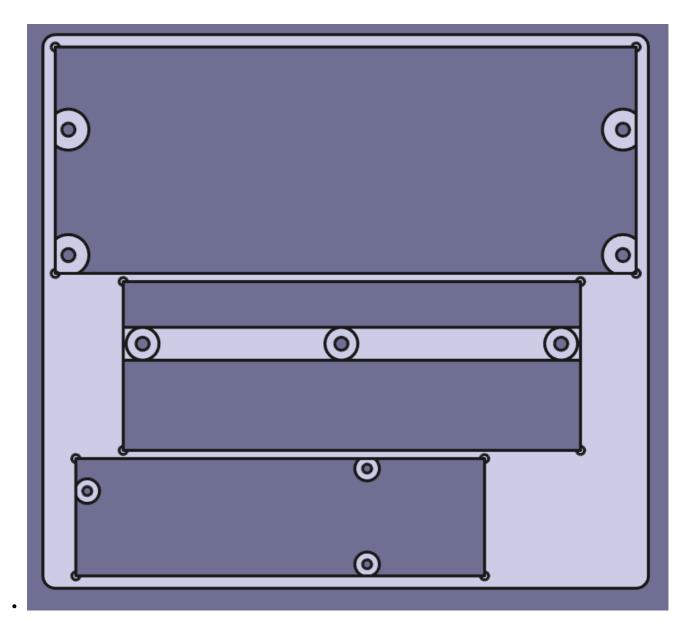

Slut resultat

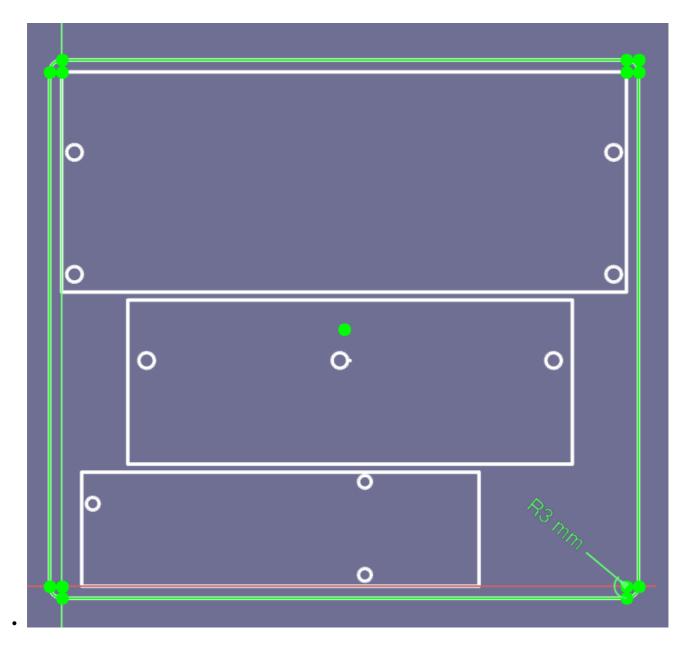

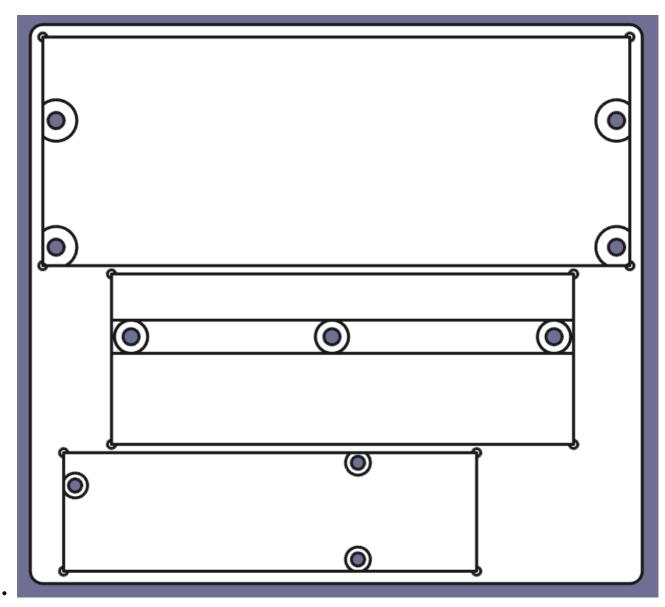

• FreeCAD-File