

Contents

1	Theory	4
1.1	Terms and Classification	4
1.1.1	Order	4
1.1.2	Laplace Operator	4
1.1.3	Conversion to Lower Order System	4
1.1.4	Notations of a PDE, Domain Ω	4
1.1.5	Classification of a PDE	5
1.2	Method of Characteristics	5
1.3	Method Separation	6
1.4	Hamilton-Jacobi Theory	7
1.5	Transformations	8
1.5.1	Fourier Series	8
1.5.2	Example: Vibrating String	8
1.5.3	Inhomogeneous Wave Equation	9
1.5.4	Laplace Transformation	9
1.5.5	Example: Heat Conduction	9
1.6	PDE 2nd Order	10
1.6.1	Classification	10
1.7	Elliptic PDEs	10
1.7.1	Maximum Principle	10
1.7.2	Example (Exercise Solutions)	10
1.7.3	Green's Function	11
1.7.4	Mean Value Property of Harmonic Functions	11
1.8	Hyperbolic PDEs	11
1.8.1	Strips/Characteristics	11
2	Numerics	12
2.1	Discretization	12
2.1.1	1st Derivative	12
2.1.2	2nd Derivative	12
2.2	FDM	12
2.2.1	Basic Equation: $-u''(x) = f(x)$	12
2.2.2	Basic Equation: $T''(x) - hT(x) = T_A$	12
2.2.3	Example Homework 7	12
2.3	Convergence	12
2.4	Consistency	13
2.4.1	Residue	13
2.4.2	Taylor	13
2.4.3	Forward/Backward Difference	13
2.4.4	Central Difference	13
2.4.5	2nd Derivative	13
2.5	Stability	13
2.6	FDM for Elliptic PDEs (Poisson: $-\Delta u = f$)	14
2.6.1	Irregular Grid (for the Boundary)	14
2.6.2	Neumann Boundary	14
2.7	FDM for Parabolic PDEs	14
2.7.1	Explicit Method (Richardson Method)	15
2.7.2	Implicit Method	15
2.7.3	Crank-Nicolson Method (Mixed Method)	16
2.8	FDM for Hyperbolic PDEs	16
2.8.1	Leap-Frog Scheme	16
2.8.2	Transport Equation	16
2.9	FVM (Finite Volume Method, Voronoi's Method)	17

3	FEM	19
3.1	The Method of Ritz	19
3.2	The Method of Galerkin	19
3.3	Weighted Residuals	19
3.4	Point Collocation	19
3.5	Domain Collocation	20
3.6	Gauss's Method (MSE)	20
3.7	Finite Elements	20
3.7.1	Node Variables	20
3.7.2	Shape Functions	20
3.7.3	Element Matrices	21
3.7.4	Finite Element Manual Calculation	21
3.7.5	h-Strategy	22
3.7.6	p-Strategy	22
3.8	Conformity and Completeness	23
3.9	Hermite Polynomials of Third Order	23
4	Fourier Series	25
4.1	Symmetry	25
4.2	Spectra	25
5	Fourier Transform	26
5.1	Properties	26
6	Laplace Transformation	27
6.1	Properties	27
6.2	From Laplace to Fourier	27
6.3	Inverse Transformation (Complex Integration)	27
6.4	Procedure for Inverse Transformation	27
6.5	Inverse Transformation via Table	28
7	Math Fundamentals	28
7.1	Partial Fraction Decomposition	28
7.1.1	Horner's Scheme	28
7.2	Trigonometry	29
7.2.1	Function Values for Angle Arguments	29
7.2.2	Quadrant Relations	29
7.2.3	Double and Half Angles	29
7.2.4	Products	29
7.2.5	Hyperbolic	29
7.2.6	Sum and Difference	29
7.2.7	Euler	29
7.2.8	Complex	29
7.3	Taylor Polynomial	29
7.4	Integral Calculus	29
7.5	Differential Equations	31
7.5.1	Linear Differential Equation of 1. Order	31
7.5.2	Linear Differential Equation 2nd Order with Constant Coefficients	31
7.5.3	General Solution of a Homogeneous ODE: Y_H	31
7.5.4	General Solution of an Inhomogeneous ODE: $y = Y_H + y_P$	31
7.5.5	Linear Differential Equation of nth Order with Constant Coefficients	32
7.5.6	Linear Differential Equation Systems of First Order with Constant Coefficients	32
7.5.7	Solving ODEs with Laplace Transformation	32
7.5.8	Common DEs	32
7.6	Differential Calculus	33
7.7	Miscellaneous	33
7.7.1	Quadratic Formula	33
7.7.2	Determinants	33
7.7.3	Matrix Inversion	33
7.7.4	Eigenvalues/ Eigenvectors	33

7.7.5 TI-89 33

Theory

1.1 Terms and Classification

1.1.1 Order

As in ordinary differential equations, the order is the highest derivative of the unknown function appearing in the differential equation.

PDE 1st Order: $F\left(x_1, \dots, x_n, u, \frac{\partial u}{\partial x_1}, \dots, \frac{\partial u}{\partial x_n}\right)$

It can be expressed by the substitution $\frac{\partial u}{\partial x_i} \rightarrow p_i$ as $F(x_1, \dots, x_n, u, p_1, \dots, p_n)$.

PDE 2nd Order: $F\left(x_1, \dots, x_n, u, \frac{\partial u}{\partial x_1}, \dots, \frac{\partial u}{\partial x_n}, \frac{\partial^2 u}{\partial x_1^2}, \dots, \frac{\partial^2 u}{\partial x_n^2}\right)$

It can be expressed by substitution $\frac{\partial u}{\partial x_i} \rightarrow p_i$, $\frac{\partial^2 u}{\partial x_i \partial x_j} \rightarrow t_{ij}$ as $F(x_1, \dots, x_n, u, p_1, \dots, p_n, t_{11}, t_{12}, \dots, t_{n,n-1}, t_{nn})$. **Example**

$$\begin{aligned} \frac{\partial^2 u}{\partial x_1 \partial x_2} = 0 & \Rightarrow F(t_{12}) = t_{12} = 0 & \Leftrightarrow F\left(\frac{\partial^2 u}{\partial x_1 \partial x_2}\right) = 0 \\ \text{Exercise } \frac{\partial u}{\partial x_1} = \frac{\partial u}{\partial x_2} & \Rightarrow F(p_1, p_2) = p_1 - p_2 = 0 & \Leftrightarrow F\left(\frac{\partial u}{\partial x_1}, \frac{\partial u}{\partial x_2}\right) = 0 \\ x_1 \frac{\partial u}{\partial x_1} + x_2 \frac{\partial u}{\partial x_2} = \frac{\partial u}{\partial x_3} & \Rightarrow F(x_1, x_2, p_1, p_2, p_3) = x_1 p_1 + x_2 p_2 - p_3 & \Leftrightarrow F\left(x_1, x_2, \frac{\partial u}{\partial x_1}, \frac{\partial u}{\partial x_2}, \frac{\partial u}{\partial x_3}\right) = x_1 \frac{\partial u}{\partial x_1} + x_2 \frac{\partial u}{\partial x_2} - \frac{\partial u}{\partial x_3} \end{aligned}$$

1.1.2 Laplace Operator

Cartesian: $\Delta u(x, y, z) = \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + \frac{\partial^2 u}{\partial z^2}$ Cylindrical: $\Delta f(\rho, \phi, z) = \frac{1}{\rho} \frac{\partial}{\partial \rho} \left(\rho, \frac{\partial f}{\partial \rho} \right) + \frac{1}{\rho^2} \frac{\partial^2 f}{\partial \phi^2} + \frac{\partial^2 f}{\partial z^2}$

Polar: $\Delta f(r, \varphi) = \frac{1}{r} \frac{\partial f}{\partial r} r \frac{\partial f}{\partial r} + \frac{1}{r^2} \frac{\partial^2 f}{\partial \varphi^2}$ Spherical: $\Delta f(r, \vartheta, \phi) = \frac{1}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial f}{\partial r} \right) + \frac{1}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \left(\sin \theta \frac{\partial f}{\partial \theta} \right) + \frac{1}{r^2 \sin^2 \theta} \frac{\partial^2 f}{\partial \varphi^2}$

1.1.3 Conversion to Lower Order System


Given: $F\left(x, y, u, \frac{\partial u}{\partial x}, \frac{\partial u}{\partial y}, \frac{\partial^2 u}{\partial x^2}, \frac{\partial^2 u}{\partial x \partial y}, \frac{\partial^2 u}{\partial y^2}\right) = 0$.

Substitution: $p = \frac{\partial u}{\partial x}, \quad q = \frac{\partial u}{\partial y}$

For second derivatives: $\frac{\partial^2 u}{\partial x^2} = \frac{\partial p}{\partial x}, \quad \frac{\partial^2 u}{\partial x \partial y} = \frac{\partial p}{\partial y} = \frac{\partial q}{\partial x}, \quad \frac{\partial^2 u}{\partial y^2} = \frac{\partial q}{\partial y}$

System of 1st order equations $p = \frac{\partial u}{\partial x}, \quad q = \frac{\partial u}{\partial y}, \quad \frac{\partial p}{\partial y} = \frac{\partial q}{\partial x}$


1.1.4 Notations of a PDE, Domain Ω



$\overset{\circ}{\Omega}$ Interior points
 $\partial \Omega$ Boundary
 $\bar{\Omega}$ Domain Ω and boundary $\partial \Omega$

The domain of a PDE **must** be open; only then is the partial derivative defined everywhere. The domain is open if, around every point in the domain Ω , a small ball can be drawn that also lies within the domain Ω .

Not a domain: Domain:

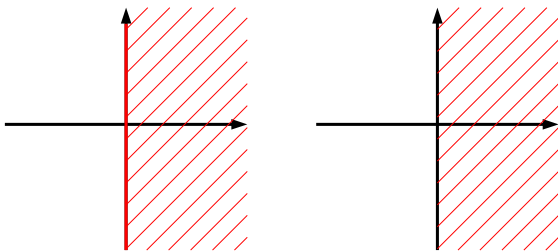

Solution of a PDE:

Given: Domain Ω , PDE, boundary values $\partial \Omega$

Solution: Function $u: \bar{\Omega} \rightarrow \mathbb{R}$, PDE in Ω and boundary values on $\partial \Omega$
 'well-posed' when the information uniquely determines the solution

1.1.5 Classification of a PDE

Order: Highest occurring partial derivative

Type: Linear: Linear in $u, x_1, \dots, x_n, \frac{\partial u}{\partial x_1}, \dots, \frac{\partial u}{\partial x_n}$

Quasilinear: Linear in $\frac{\partial u}{\partial x_1}, \dots, \frac{\partial u}{\partial x_n}$

Nonlinear: Everything else

1.2 Method of Characteristics

Important: Characteristics **cannot** be used as initial conditions, otherwise the characteristic becomes the solution (instead of obtaining a surface, you get a curve).

Important: The characteristic must pass through the boundary only once.

Useful for Quasilinear PDEs of 1st order. If separation is possible, this (simpler) method should be used.

Initial condition:

$$a(x, y, u) \cdot \frac{\partial u}{\partial x} + b(x, y, u) \cdot \frac{\partial u}{\partial y} - c(x, y, u) = 0$$

Characteristic:

$$\frac{d}{dt} \begin{bmatrix} x(t) \\ y(t) \\ u(t) \end{bmatrix} = \begin{bmatrix} a(x, y, u) \\ b(x, y, u) \\ c(x, y, u) \end{bmatrix}$$

Region: $\Omega\{\dots | x > 0, \text{all } y\}$ Boundary condition: $u(0, y_0) = g(y_0)$

Vector notation: $\begin{bmatrix} a(x, y, u) \\ b(x, y, u) \\ c(x, y, u) \end{bmatrix} \underbrace{\begin{bmatrix} \frac{\partial u}{\partial x} & \frac{\partial u}{\partial y} & -1 \end{bmatrix}}_{\vec{n}: \text{Normal to surface}} = 0$

Tangents: $\vec{t}_x = \begin{bmatrix} 1 \\ 0 \\ \frac{\partial u}{\partial x} \end{bmatrix} \quad \vec{t}_y = \begin{bmatrix} 0 \\ 1 \\ \frac{\partial u}{\partial y} \end{bmatrix} \quad \vec{n} \bullet \vec{t}_x = 0 \quad \vec{n} \bullet \vec{t}_y = 0 \quad \vec{t}_x \bullet \vec{t}_y = \vec{n}$

Solution approach: For each initial point $\begin{bmatrix} 0 \\ y_0 \\ g(y_0) \end{bmatrix}$ find a characteristic, then solve for x, y .


Boundary Conditions A solution function $u(x, y)$ must be covered by characteristics. The solution is now determined by the boundary values.

For the depicted region Ω , different cases are possible:

1. Boundary values on the *left* and *right* are given. A region in the middle is undetermined.
2. Boundary values on the *upper* and *lower* boundaries are given. A part of the region is over-determined.
3. Boundary values on the *left* and *lower* boundaries are given. The function is uniquely determined (but not necessarily differentiable everywhere).

The solution is not determinable for all boundary values.

If two characteristics meet \rightarrow Singularity

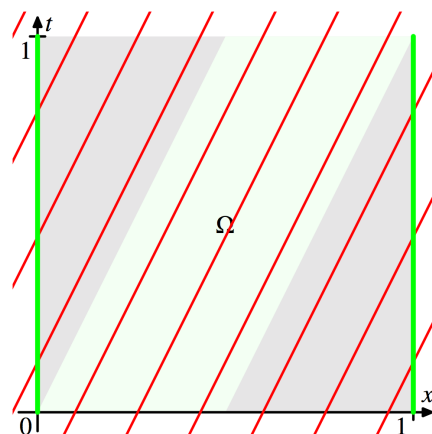

Example:

1. PDE with boundary conditions and domain: $\frac{\partial u}{\partial x} + 2\frac{\partial u}{\partial y} = 3, \quad u(0, y) = g(y) = \sin(y) \Rightarrow u(0, y_0) = g(y_0) = \sin(y_0)$

Terms in matrix form: $\begin{bmatrix} a \\ b \\ c \end{bmatrix} = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix}$

2. Calculate characteristics from PDE \rightarrow ODE: $\frac{d}{dt} \begin{bmatrix} x(t) \\ y(t) \\ u(t) \end{bmatrix} = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix}$

3. Solve ODEs (for standard ODEs, see 7.5.8 on page 32.): $\begin{bmatrix} x \\ y \\ u \end{bmatrix} = \begin{bmatrix} 1t + x_0 \\ 2t + y_0 \\ 3t + u_0 \end{bmatrix}$

4. Substitute initial conditions: $\begin{bmatrix} x \\ y \\ u \end{bmatrix} = \begin{bmatrix} 1t + x_0 \\ 2t + y_0 \\ 3t + u_0 \end{bmatrix} \Big|_{t=0} = \begin{bmatrix} x_0 \\ y_0 \\ u_0 \end{bmatrix} = \begin{bmatrix} 0 \\ y_0 \\ \sin(y_0) \end{bmatrix}$

Solution of ODE is: $\begin{bmatrix} x \\ y \\ u \end{bmatrix} = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix} \cdot t + \begin{bmatrix} 0 \\ y_0 \\ \sin(y_0) \end{bmatrix}$

5. Eliminate all variables except u, x, y : $u = 3x + \sin(y - 2x)$

6. Verification: Derive the result ($u = 3x + \sin(y - 2x)$) and substitute it into the original PDE $\frac{\partial u}{\partial x} + 2\frac{\partial u}{\partial y} = 3$ to check if it is satisfied.

1.3 Method Separation

Choosing a suitable coordinate system is important.

1. **Approach** (Highest derivative decisive):

- For PDE 1st Order: $U(x, y) = X(x) + Y(y)$
- For PDE 2nd Order: $U(x, y) = X(x) \cdot Y(y)$

2. **Substitution:** Substitute the approach into the PDE.

3. **Separation:** Each side of the PDE should only have one variable. The two resulting ordinary differential equations are coupled by a constant (fixing the variable). Choice of constant: If oscillation is expected, $-k^2$, otherwise k , unless you know better ;-).

4. **Solving the ODEs:** Obtain a family of solutions

5. **Constructing the General Solution:** (Linear combination of solutions), adhere to boundary conditions!

Example 1: PDE: $\frac{1}{x} \frac{\partial u}{\partial x} + \frac{1}{y} \frac{\partial u}{\partial y} = \frac{1}{y^2}$

1. Approach:

$$u(x, y) = X(x) + Y(y) \text{ (1st Order)}$$

2. Substitution:

$$\frac{\partial u}{\partial x} = X'(x) \quad \frac{\partial u}{\partial y} = Y'(y) \quad \Rightarrow \quad \frac{X'(x)}{x} + \frac{Y'(y)}{y} = \frac{1}{y^2}$$

3. Separation:

$$\frac{X'(x)}{x} = k = \frac{1}{y^2} - \frac{Y'(y)}{y}$$

4. Solving ODEs:

$$X'(x) = k \cdot x \Rightarrow X(x) = \frac{1}{2} k x^2 + C_x$$

$$Y'(y) = \frac{1}{y} - k y \Rightarrow Y(y) = \ln(y) - \frac{1}{2} k y^2 + C_y$$

5. Linear Combination:

$$u(x, y) = \frac{1}{2} k x^2 - \frac{1}{2} k y^2 + \ln(y) + C$$

Example 2: PDE: $x^2 \frac{\partial^2 u}{\partial x^2} + x \frac{\partial u}{\partial x} + y^2 \frac{\partial^2 u}{\partial y^2} + y \frac{\partial u}{\partial y} = 0$
Boundary conditions: $\Omega = [1, 2] \times [1, 2]$ $u = 0$ on $\partial\Omega$

1. Approach:

$$u(x, y) = X(x) \cdot Y(y) \text{ (2nd Order)}$$

2. Substitution:

$$x^2 X''(x) Y(y) + x X'(x) Y(y) + y^2 X(x) Y''(y) + y X(x) Y'(y) = 0$$

3. Separation: Division by $X(x)Y(y)$

$$\frac{x^2 X''(x)}{X(x)} + \frac{x X'(x)}{X(x)} + \frac{y^2 Y''(y)}{Y(y)} + \frac{y Y'(y)}{Y(y)} = 0 \Rightarrow \frac{x^2 X''(x)}{X(x)} + \frac{x X'(x)}{X(x)} = k = -\frac{y^2 Y''(y)}{Y(y)} - \frac{y Y'(y)}{Y(y)}$$

4. Solving ODEs:

$$\frac{x^2 X''(x)}{X(x)} + \frac{x X'(x)}{X(x)} = k \Rightarrow x^2 X''(x) + x X'(x) - k X(x) = 0 \quad \text{with } X(1) = X(2) = 0$$

$$\frac{y^2 Y''(y)}{Y(y)} - \frac{y Y'(y)}{Y(y)} = -k \Rightarrow y^2 Y''(y) + y Y'(y) + k Y(y) = 0 \quad \text{with } Y(1) = Y(2) = 0$$

Solution of ODEs not done here.

1.4 Hamilton-Jacobi Theory

The Hamilton-Jacobi Theory starts with a total energy $H(x_i, p_i)$ depending on position and momentum. To achieve this, a function $S(x_i, t)$ must be found for which

$$\frac{\partial S}{\partial t} = H(x_i, p_i) = H\left(x_i, \frac{\partial S}{\partial x_i}\right) \quad \text{with } p_i = \frac{\partial S}{\partial x_i}$$

This can usually be solved by integration, introducing integration constants P_i . The *trajectory parameters* Q_i are

$$Q_i = \frac{\partial S}{\partial P_i}$$

and the trajectory has the form

$$x_i(t, Q_i, P_i)$$

Example 3: PDE: $\frac{\partial^2 u}{\partial t^2} = \frac{\partial^2 u}{\partial x^2}$ $u(t=0, x) = 0$
Boundary conditions: $x = [0, \pi]$
 $\frac{\partial u}{\partial t}(t=0, x) = \sin^3(x) = \frac{3}{4} \sin(x) - \frac{1}{4} \sin(3x)$

1. Approach:

$$u(t, x) = T(t) \cdot X(x) \text{ (2nd Order)}$$

2. Substitution:

$$T''(t) \cdot X(x) = X''(x) \cdot T(t)$$

3. Separation:

$$\frac{X''(x)}{X(x)} = -\mu^2 = \frac{T''(t)}{T(t)}$$

4. Solving ODEs:

$$X(x) = \sin(\mu x) \quad T(t) = \sin(\mu t)$$

$$X(x) = \cos(\mu x) \quad T(t) = \cos(\mu t)$$

5. Linear Combination:

The boundary conditions $x = 0$ and $x = \pi$ can only be satisfied with $\sin(\mu x)$ and positive, integer μ . $\cos(nx)$ terms are eliminated.

$$u(t, x) = \sum_{n=1}^{\infty} a_n \sin(nx) \sin(nt) + \sum_{n=1}^{\infty} b_n \sin(nx) \cos(nt)$$

The coefficients a_n and b_n must be determined using the initial conditions at time $t = 0$:

$$u(0, x) = \sum_{n=1}^{\infty} b_n \sin(nx) = 0 \Rightarrow b_n = 0$$

$$\frac{\partial u}{\partial t}(\pi, x) = \sum_{n=1}^{\infty} a_n n \sin(nx) = \sin^3(x) = \frac{3}{4} \sin(x) - \frac{1}{4} \sin(3x) \Rightarrow a_1 = \frac{3}{4} \quad a_3 = -\frac{1}{12} \quad a_k = 0 \text{ for } k \neq 1, 3$$

$$u(t, x) = \frac{3}{4} \sin(x) \sin(t) - \frac{1}{12} \sin(3x) \sin(3t)$$

1.5 Transformations

- The transition from functions to Fourier series transforms a partial differential equation into a family of ordinary differential equations for the individual Fourier coefficients.
- Integral transformations can transform a partial differential equation into a family of partial differential equations with fewer variables or even ordinary differential equations.
- Integral transformations and their inverses can provide formulas for solutions to certain partial differential equations, answering the question of well-posedness for given boundary conditions.

Domain	Transformation
$[0, \infty)$	Laplace transformation
\mathbb{R}	Fourier transformation
$[-\pi, \pi]$	Fourier series

1.5.1 Fourier Series

$$u(t, x) = \frac{a_0(t)}{2} + \sum_{k=1}^{\infty} a_k(t) \cos(kx) + b_k(t) \sin(kx)$$

1.5.2 Example: Vibrating String

$$\partial_t^2 u = \partial_x^2 u$$

1. Insert Fourier analysis approach into PDE:

$$\begin{aligned} \partial_t^2(t, x) &= \frac{a_0''(t)}{2} + \sum_{k=1}^{\infty} a_k''(t) \cos(kx) + b_k''(t) \sin(kx) & \partial_x^2(t, x) &= - \sum_{k=1}^{\infty} a_k(t) k^2 \cos(kx) + b_k(t) k^2 \sin(kx) \\ \partial_t^2(t, x) &= \partial_x^2(t, x) & \iff & \frac{a_0''(t)}{2} + \sum_{k=1}^{\infty} a_k''(t) \cos(kx) + b_k''(t) \sin(kx) &= - \sum_{k=1}^{\infty} a_k(t) k^2 \cos(kx) + b_k(t) k^2 \sin(kx) \end{aligned}$$

$$\Rightarrow \frac{a_0''(t)}{2} + \sum_{k=1}^{\infty} (a_k''(t) + a_k(t) k^2) \cos(kx) + (b_k''(t) + b_k(t) k^2) \sin(kx) = 0$$

2. This equation is only solvable if all coefficients vanish (Fourier theory):

$$a_0''(t) = 0 \quad a_k''(t) = -k^2 a_k(t) \quad b_k''(t) = -k^2 b_k(t)$$

3. The Fourier transformation has transformed the PDE into a system of ODEs, the solutions of which are well-known:

$$a_0(t) = m_0(t) + c_0 \quad a_k(t) = A_k^a \cos(kt) + B_k^a \sin(kt) \quad b_k(t) = A_k^b \cos(kt) + B_k^b \sin(kt)$$

Initial Conditions: The differential equations for the coefficients $a_k(t)$ and $b_k(t)$ can only be completely solved when initial or boundary conditions are given.

- Initial conditions for wave equation:

$$u(0, x) = f(x) \quad \frac{\partial u}{\partial t} = g(x)$$

- The functions f and g can also be represented as Fourier series:

$$f(x) = \frac{a_0^f}{2} + \sum_{k=1}^{\infty} a_k^f \cos(kx) + b_k^f \sin(kx)$$

$$g(x) = \frac{a_0^g}{2} + \sum_{k=1}^{\infty} a_k^g \cos(kx) + b_k^g \sin(kx)$$

- Together with the approach for $u(t, x)$, the equations (for $t = 0$) are obtained:

$$\frac{a_0(0)}{2} + \sum_{k=1}^{\infty} a_k(0) \cos(kx) + b_k(0) \sin(kx) = \frac{a_0^f}{2} + \sum_{k=1}^{\infty} a_k^f \cos(kx) + b_k^f \sin(kx)$$

$$\frac{a_0'(0)}{2} + \sum_{k=1}^{\infty} a_k'(0) \cos(kx) + b_k'(0) \sin(kx) = \frac{a_0^g}{2} + \sum_{k=1}^{\infty} a_k^g \cos(kx) + b_k^g \sin(kx)$$

- Coefficient comparison yields:

$$a_k(0) = a_k^f \quad a'_k(0) = a_k^g \quad b_k(0) = b_k^f \quad b'_k(0) = b_k^g$$

- The complete solution is thus:

$$u(t, x) = \frac{a_0^g(t) + a_0^f}{2} + \sum_{k=1}^{\infty} \left(a_k^f \cos(kt) + \frac{1}{k} a_k^g \sin(kt) \right) \cos(kx) + \left(b_k^f \cos(kt) + \frac{1}{k} b_k^g \sin(kt) \right) \sin(kx)$$

1.5.3 Inhomogeneous Wave Equation

The method can also be generalized to the inhomogeneous wave equation. The perturbation term is also expanded as a Fourier series.

$$\partial_t^2 u - \partial_x^2 u = f \quad \Rightarrow \quad f(t, x) = \frac{a_0^f(t)}{2} + \sum_{k=1}^{\infty} a_k^f(t) \cos(kx) + b_k^f \sin(kx)$$

1.5.4 Laplace Transformation

$$\boxed{F(t) = \int_0^{\infty} f(t) e^{-st} dt} \quad \text{See also later in the summary! (in Chapter 6.1 and page 27)}$$

Solution of an ODE:

$$\dot{x}(t) + px(t) = f(t) \quad f(t) = q$$

$$\dot{x}(t) + px(t) = f(t) \quad \circ \bullet \quad sX(s) - x(0) + pX(s) = F(s) \quad f(t) \quad \circ \bullet \quad F(s) = \frac{q}{s}$$

$$\Rightarrow X(s) = \frac{F(s) + x(0)}{s+p} = \frac{q + x(0)}{s(s+p)} \Big|_{x(0)=0} \quad \bullet \circ \quad x(t) = \frac{q}{p} (1 - e^{-pt})$$

Solution of a PDE:

$$\frac{\partial u}{\partial t} + x \frac{\partial u}{\partial x} = x \quad t \geq 0, \quad x \geq 0 \quad u(x, 0) = 0, \quad u(0, t) = 0 \quad x, t > 0$$

$$\text{Transformation: } \frac{\partial u}{\partial t} + x \frac{\partial u}{\partial x} = x \quad \circ \bullet \quad sU(s, x) - u(x, 0) + x \frac{\partial U(s, x)}{\partial x} = \frac{x}{s} \quad \Rightarrow \quad U(s, x) = \frac{x}{s(s+1)}$$

$$U(s, x) \quad \bullet \circ \quad x(1 - e^{-t})$$

1.5.5 Example: Heat Conduction

At time $t = 0$, the rod has temperatures of -1 at $x = -\frac{\pi}{2}$ and 1 at $x = \frac{\pi}{2}$ -> stationary state. At time $t = 0$, the reservoirs are removed, and the rod is left to itself. In particular, no heat can be dissipated through the ends.

$$\frac{\partial u}{\partial t} = \frac{\partial^2 u}{\partial x^2} \quad \text{or in general:} \quad \frac{\partial u}{\partial t} = a^2 \frac{\partial^2 u}{\partial x^2}$$

“Triangle function”

$$d(x) = \begin{cases} -2 - \frac{2x}{\pi} & -\frac{\pi}{2} \leq x \\ \frac{2x}{\pi} & -\frac{\pi}{2} \leq x \leq \frac{\pi}{2} \\ 2 - \frac{2x}{\pi} & x \leq \frac{\pi}{2} \end{cases} = \sum_{n=0}^{\infty} \frac{8(-1)^n}{\pi^2(2n+1)^2} \sin((2n+1)x)$$

$\hat{u}(t, k)$ Fourier-Sine-Coefficients / $\mathcal{L}u$ Laplace Transformation.

Initial conditions are odd -> solution of the differential equation for all times odd.

Boundary conditions: $\partial_x u(t, -\frac{\pi}{2}) = \partial_x u(t, \frac{\pi}{2}) = 0$ -> Reflection at $-\frac{\pi}{2}$ and $\frac{\pi}{2}$ -> extend to a 2π -periodic function on \mathbb{R}

$$\partial_t \hat{u}(t, k) = -k^2 \hat{u}(t, k)$$

Now this equation can be Laplace-transformed:

$$s\mathcal{L}\hat{u}(s, k) - \hat{u}(0, k) = -k^2 \mathcal{L}\hat{u}(s, k)$$

$$(s + k^2) \mathcal{L}\hat{u}(s, k) = \hat{u}(0, k)$$

$$\mathcal{L}\hat{u}(s, k) = \frac{\hat{u}(0, k)}{s + k^2}$$

Inverse transformation yields:

$$\hat{u}(t, k) = \hat{u}(0, k)e^{-k^2 t}$$

Now, only the Fourier coefficients need to be determined, which can be obtained from the triangle function:

$$\hat{u}(0, 2n+1) = \frac{8(-1)^n}{\pi^2(2n+1)^2}$$

and thus, the final solution is obtained by summing the Fourier series:

$$u(t, x) = \sum_{n=0}^{\infty} \frac{8(-1)^n}{\pi^2(2n+1)^2} e^{-(2n+1)^2 t} \sin((2n+1)x)$$

1.6 PDE 2nd Order

Linear partial differential equations of the second order have the form:

$$\sum_{i,j=1}^n a_{ij} \partial_i \partial_j u + \sum_{i=1}^n b_i \partial_i u + cu = f$$

1.6.1 Classification

Classification only for PDEs of the second order!

Eigenvalue calculation: (e.g., for $\partial_x^2 u + 2\partial_x \partial_y u + \partial_y^2 u = 0$) Alternatively (if, for example, a very complicated PDE needs to be classified), the signs of the eigenvalues can also be determined via trace and determinant:

1. Form a symmetric matrix and subtract λ on the diagonal. For example: $A = \begin{pmatrix} \partial_x^2 & \partial_x \partial_y \\ \partial_y \partial_x & \partial_y^2 \end{pmatrix}$

In diagonal matrices, the eigenvalues correspond to the diagonal entries.

2. Set determinant equal to 0: $\det(\mathbf{A} - \lambda \mathbf{I}) = 0 \Rightarrow \lambda_i$
3. Solve the equation

1. See left (Eigenvalue calculation): Form matrix A

2. Calculate determinant and try to read from the table:
 $\det A = a_{11}a_{22} - a_{12}a_{21} = \lambda_1 \lambda_2$

3. Calculate trace and try to read from the table:
 $\text{tr}(A) = a_{11} + a_{22} = \lambda_1 + \lambda_2$

Class	Number of Eigenvalues			$\det(A)$ for $n=2$	Example
	Positive	Negative	Zero(=0)		
Hyperbolic	n-1	1	0	$\det < 0$	Wave Equation: $\frac{\partial^2 u}{\partial t^2} = \Delta u$
Parabolic	n-1	0	1	$\det = 0$	Heat Equation: $\frac{\partial u}{\partial t} = \Delta u$
Elliptic	n	0	0	$\det > 0$	Potential: $\Delta u = f$
Ultrahyperbolic	>1	>1	0	-	-

1.7 Elliptic PDEs

$$\Delta u = f \quad \omega = \{(x, y) | y \geq 0\}, \quad u(x, y) = ay$$

Theorem: If Ω is bounded and connected, then the solution u is always unique.

Proof: Assume: $u = u_1 - u_2$

$$\text{Substitute: } \Delta u_1 - \Delta u_2 = f - f = 0$$

$$(u_1 - u_2)|_{\partial\omega} = g - g = 0$$

$$\Delta u = 0 \quad u|_{\partial\Omega} = 0$$

If $u = 0$ is a solution, then there is only one solution.

1.7.1 Maximum Principle

If $\Delta u = 0$, then u is *harmonic*, and the extrema (maxima and minima of the function) are located on the boundary $\partial\Omega$.

1.7.2 Example (Exercise Solutions)

An elliptic PDE like $\Delta u = c$ has only one solution with the given Dirichlet boundary values. Remember: The reason was the maximum principle. If there were a second solution $\bar{v}(r, \phi)$ with the same boundary values, $v - \bar{v}$ would be a solution to the equation $\Delta(v - \bar{v}) = 0$, a harmonic function. The boundary values of $v - \bar{v}$ are 0. Since a harmonic function attains the maximum on the boundary, $v - \bar{v} = 0$ is the solution, so it is unique.

1.7.3 Green's Function

An elliptic PDE is solved by inverting Δ . This inversion is done using Green's function, which is the inverse function of Δ : Laplace operator.

$$u(x) = \int_{\Omega} \sigma(x, \xi) f(\xi) d\xi + \int_{\Omega} h(x, \xi) f(\xi) d\xi \quad \sigma(x, \xi) = \begin{cases} \frac{1}{2} |x - \xi| & n = 1 \\ \frac{1}{2\pi} \log |x - \xi| & n = 2 \\ -\frac{1}{4\pi} \frac{1}{|x - \xi|} & n = 3 \\ \frac{1}{(2-n)\mu(S^{n-1})} |x - \xi|^{2-n} & n \geq 3 \end{cases}$$

Green's function: $G(x, \xi) = \sigma(x, \xi) + h(x, \xi)$

Theorem: If Ω is a domain where the Dirichlet problem is uniquely solvable, then there exists a function $G(x, \xi)$, which, as a function of x , solves the equation

$$\Delta G(x, \xi) = \delta(x - \xi)$$

with homogeneous boundary conditions. Solution: $u(x) = \int_{\Omega} G(x, \xi) f(\xi) d\xi + \int_{\partial\Omega} g(\xi) \cdot \text{grad}_{\xi} G(x, \xi) d\eta$ η : normal vector of ∂G

1.7.4 Mean Value Property of Harmonic Functions

$$\Delta h = 0 \quad \text{Mean Value Property:} \quad h(x) = \begin{cases} \frac{h(x+\delta) + h(x-\delta)}{2} & n = 1 \\ \frac{1}{2\pi r} \int_{S_r^1} h(x + \xi) d\xi & n = 2 \\ \frac{1}{4\pi r^2} \int_{S_r^2} h(x + \xi) d\xi & n = 3 \end{cases}$$

1.8 Hyperbolic PDEs

$$\text{PDE: } \frac{\partial^2 u}{\partial t^2} - a^2 \frac{\partial^2 u}{\partial x^2} = 0 \quad \Omega = \{(x, t) | t > 0\} \quad u_0 = u(x, 0)$$

$$\text{Trick: } (\partial_t + a\partial_x)(\partial_t - a\partial_x)u = (\partial_t^2 - a^2\partial_x^2)u = 0 \quad (\text{for constant velocity } a)$$

$$\text{Two possible solutions: } \underbrace{(\partial_t + a\partial_x)u = 0}_{\text{Wave to the right}} \quad \underbrace{(\partial_t - a\partial_x)u = 0}_{\text{Wave to the left}}$$


$$\text{Solution using characteristics: } \frac{\partial}{\partial s} \begin{Bmatrix} x(s) \\ t(s) \\ u(s) \end{Bmatrix} = \begin{Bmatrix} \pm a \\ 1 \\ 0 \end{Bmatrix} \Rightarrow \begin{cases} x = \pm as + x_0 \\ t = s + t_0 = s \\ u = u_0 \end{cases} \quad (t_0 = 0)$$

$$x = \pm at + x_0 \Rightarrow x_0 = x \mp at \Rightarrow u(x, t) = u_0(x \mp at)$$

$$\text{General solution from linear combination: } u(x, t) = u_+(x + at) + u_-(x - at)$$

\Rightarrow **Two** initial conditions are needed to determine u_+ **and** u_- .

$$\text{e.g.: } u(x, 0) = u_0(x) \quad \frac{\partial u}{\partial t}(x, 0) = g_0(x)$$

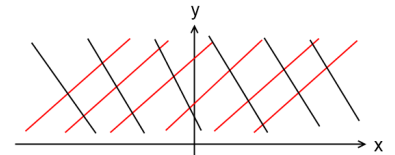

1.8.1 Strips/Characteristics

$$\text{PDE: } a\partial_x^2 u + 2b\partial_x\partial_y u + c\partial_y^2 u + d\partial_x u + e\partial_y u + fu = g \quad \text{Symbol matrix: } \begin{bmatrix} a & b \\ b & c \end{bmatrix}$$

$$\left. \begin{aligned} u(x(t), y(t)) &= u(t) \\ \partial_x u(x(t), y(t)) &= p(t) \\ \partial_y u(x(t), y(t)) &= q(t) \end{aligned} \right\}$$

Characteristics satisfy the ODE:

$$a\dot{y}(t)^2 - 2b\dot{x}(t)\dot{y}(t) + c\dot{x}(t)^2 = 0$$

$$\text{Characteristic strip additionally satisfies: } a\dot{p}(t)\dot{y}(t) - h\dot{x}(t)\dot{y}(t) + c\dot{x}(t)\dot{q}(t) = 0$$

2 Numerics

2.1 Discretization

2.1.1 1st Derivative

$$g'(x) \approx \frac{g(x + \Delta x) - g(x)}{\Delta x} \quad \text{or} \quad \boxed{g'(x) \approx \frac{g(x + \Delta x) - g(x - \Delta x)}{2\Delta x}} \quad (\text{Central Difference: Better Quality})$$

2.1.2 2nd Derivative

$$\boxed{g''(x) \approx \frac{g(x - \Delta x) - 2g(x) + g(x + \Delta x)}{\Delta x^2}}$$
 is the same for the second (better quality) version.

2.2 FDM

TIP: Derive the equation system by hand for non-zero initial conditions, reduces the chance of errors.

2.2.1 Basic Equation: $-u''(x) = f(x)$

$$A^{(n)} \tilde{u}^{(n)} = f^{(n)}$$

$$A^{(n)} = \frac{1}{\Delta x^2} \text{tridiag}_{n-1}(-1, 2, -1) = \frac{1}{\Delta x^2} \begin{bmatrix} 2 & -1 & 0 & \dots \\ -1 & 2 & -1 & \dots \\ 0 & -1 & 2 & \dots \\ 0 & 0 & -1 & \dots \\ \dots & & & \end{bmatrix} \quad (\text{an } (n-1) \times (n-1) \text{ matrix})$$

$$\text{Boundary: } u(0) = a \quad u(n) = b \quad A^{(n)} \tilde{u}^{(n)} = \begin{bmatrix} f(x_1^{(n)}) + \frac{a}{\Delta x^2} \\ f(x_2^{(n)}) \\ \vdots \\ f(x_{(n-1)}^{(n)}) + \frac{b}{\Delta x^2} \end{bmatrix}$$

2.2.2 Basic Equation: $T''(x) - hT(x) = T_A$

$$-T'' + hT(x) = hT_A$$

$$A^{(n)} = \frac{1}{\Delta x^2} \text{tridiag}_{n-1}(-1, 2 + h\Delta x^2, -1) = \frac{1}{\Delta x^2} \begin{bmatrix} 2 + h\Delta x^2 & -1 & 0 & \dots \\ -1 & 2 + h\Delta x^2 & -1 & \dots \\ 0 & -1 & 2 + h\Delta x^2 & \dots \\ 0 & 0 & -1 & \dots \\ \dots & & & \end{bmatrix}$$

2.2.3 Example Homework 7

Given: $u''(x) = 4(u(x) - x)$ with boundary values $u(0) = 0$ and $u(1) = 2$ with $\Delta x = 1/3$.

To find: $\tilde{u}(\frac{1}{3})$ and $\tilde{u}(\frac{2}{3})$

Solution: Substitute the derivative of u'' into the equation, see above, giving the general equation $\frac{u(x-\Delta x) - 2u(x) + u(x+\Delta x)}{\Delta x^2} = 4(u(x) - x)$, for points P1 and P2, this yields:

$$\text{P1: } \frac{0 - 2\tilde{u}(\frac{1}{3}) + \tilde{u}(\frac{2}{3})}{(\frac{1}{3})^2} = 4(\tilde{u}(\frac{1}{3}) - \frac{1}{3}) \quad \text{P2: } \frac{\tilde{u}(\frac{1}{3}) - 2\tilde{u}(\frac{2}{3}) + 2}{(\frac{1}{3})^2} = 4(\tilde{u}(\frac{2}{3}) - \frac{2}{3})$$

Now solve the system of equations to get $\tilde{u}(\frac{1}{3})$ and $\tilde{u}(\frac{2}{3})$

2.3 Convergence

A model is convergent if, as $n \rightarrow \infty$, the approximation \tilde{u} and u coincide.

$$\boxed{\|v\|_{\Delta x} = \sqrt{\Delta x(v_1^2 + v_2^2 + \dots + v_{n-1}^2)} = \sqrt{\Delta x} \|v\|}$$

$$\text{It converges if: } \lim_{n \rightarrow \infty} \|\tilde{u}^{(n)} - u^{(n)}\|_{1/n} = \sqrt{\frac{1}{n}} \|\tilde{u}^{(n)} - u^{(n)}\| = \sqrt{\frac{1}{n}} \sqrt{(\tilde{u}_1 - u_1)^2 + \dots + (\tilde{u}_{n-1} - u_{n-1})^2} = 0$$

2.4 Consistency

A model is consistent when the model aligns with reality through simplification.

2.4.1 Residue

Exact: $A^{(n)} \cdot \tilde{u}^{(n)} - f^{(n)} = 0$

Residue: $A^{(n)} \cdot (u^{(n)} - \tilde{u}^{(n)}) = r^{(n)}$

An approximation method is consistent if $\lim_{n \rightarrow \infty} \|r^{(n)}\|_{1/n} = 0$ holds.

Consistency is a necessary but not sufficient condition for the convergence of a method.

2.4.2 Taylor

$g(x) = \sum_{k=0}^n \frac{1}{k!} g^{(k)}(x_0)(x - x_0)^k + \frac{1}{(n+1)!} g^{(n+1)}(\xi)(x - x_0)^{n+1} = \text{Taylor Approximation Polynomial} + \text{Lagrange Remainder}$
 $\xi \mapsto [x_0 < \xi < x]$

Alternative $f(x_0 + h) = f(x_0) + f'(x_0)\frac{h}{1!} + \dots + f^{(n)}(x_0)\frac{h^n}{n!} + R_n(h)$ where $h = x - x_0$

2.4.3 Forward/Backward Difference

$g'(x) - \frac{g(x+\Delta x) - g(x)}{\Delta x} = O(\Delta x) = \frac{g''(\xi)}{2} \Delta x \Rightarrow \text{1st Order}$

2.4.4 Central Difference

$g'(x) - \frac{g(x+\Delta x) - g(x-\Delta x)}{2\Delta x} = O(\Delta x^2) = \frac{g'''(\xi_1) + g'''(\xi_2)}{12} \Delta x^2 \Rightarrow \text{2nd Order}$

2.4.5 2nd Derivative

$g''(x) - \frac{g(x+\Delta x) - 2g(x) + g(x-\Delta x))}{\Delta x^2} = O(\Delta x^2) = \frac{g''''(\xi_1) + g''''(\xi_2)}{24} \Delta x^2 \Rightarrow \text{2nd Order}$

Global consistency error for 2nd Derivative: $\|r^{(n)}\|_{1/n} \leq \frac{1}{12} \max_{\xi \in [0,1]} |f''(\xi)| \cdot \Delta x^2$

2.5 Stability

The stability of a matrix can be determined through its norm $\|A\|_*$.

It holds: $\|A\|_* = \max_{\|x\|_*=1} \|A \cdot x\|_* \quad \|A \cdot x\|_* \leq \|A\| \|x\|_*$

An approximation method is stable if, independent of the constant C , the following holds: $\|A^{(n)-1}\|_{1/n} \leq C$

Determining $\|A\|$ is generally not easy, so $\|A\|$ is often determined through the diagonalization of A .

$$y = A \cdot x \quad \Rightarrow \quad \tilde{y} = D \cdot \tilde{x} \quad \text{with} \quad D = \begin{bmatrix} \lambda_1 & & \\ & \ddots & \\ & & \lambda_n \end{bmatrix}$$

It holds $TAT^T = D$, where T is the transformation matrix from x coordinate system to \tilde{x} coordinate system. T is orthogonal. The diagonal elements $\lambda_1, \dots, \lambda_n$ are also called eigenvalues.

It follows: $\|A\| = \max_k |\lambda_k|$ and $\|A^{-1}\| = \{\min_k |\lambda_k|\}^{-1}$

Determining eigenvalues: $\det(A - \lambda I) = |A - \lambda I| = 0 \quad \Rightarrow \quad \lambda_1, \dots, \lambda_n$

Determining eigenvectors (for each λ_i): $(A - \lambda_i I) \cdot v_i = 0 \quad \Rightarrow \quad v_1, \dots, v_n$

2.6 FDM for Elliptic PDEs (Poisson: $-\Delta u = f$)

Equation: $-\Delta u(x, y) = f(x, y) \quad -\Delta u(x, y) = -\left(\frac{g(x+\Delta x, y) - 2g(x, y) + g(x-\Delta x, y)}{2\Delta x} + \frac{g(x, y+\Delta y) - 2g(x, y) + g(x, y-\Delta y)}{2\Delta y}\right)$


$$h = \Delta x = \Delta y \Rightarrow \boxed{-\frac{1}{h^2}(\tilde{u}_{j,k+1} + \tilde{u}_{j+1,k} + \tilde{u}_{j,k-1} + \tilde{u}_{j-1,k} - 4\tilde{u}_{j,k}) = f_{j,k}}$$

$$B\tilde{u} = f \Rightarrow B = \begin{bmatrix} T & D & 0 & \dots \\ D & T & D & \dots \\ 0 & D & T & \dots \\ 0 & 0 & D & \dots \\ \dots & \dots & \dots & \dots \end{bmatrix} \text{ where } T = \frac{1}{h^2} \begin{bmatrix} 4 & -1 & 0 & \dots \\ -1 & 4 & -1 & \dots \\ 0 & -1 & 4 & \dots \\ 0 & 0 & -1 & \dots \end{bmatrix} \text{ and } D = \frac{1}{h^2} \begin{bmatrix} -1 & 0 & 0 & \dots \\ 0 & -1 & & \dots \\ 0 & 0 & -1 & \dots \\ \dots & \dots & \dots & \dots \end{bmatrix}$$

$$\tilde{u} = \begin{bmatrix} \tilde{u}_{1,1} \\ \tilde{u}_{2,1} \\ \vdots \\ \tilde{u}_{1,2} \\ \tilde{u}_{2,2} \\ \vdots \end{bmatrix} \quad f = \begin{bmatrix} f_{1,1} \\ f_{2,1} \\ \vdots \\ f_{1,2} \\ f_{2,2} \\ \vdots \end{bmatrix} + \frac{1}{h^2} \begin{bmatrix} u(0,0) + u(1,0) + u(0,1) \\ u(2,0) \\ \vdots \\ u(0,2) \\ 0 \\ \vdots \end{bmatrix}$$

Boundary conditions must be incorporated into f if $u(x, y) \neq 0$ on $\partial\Omega$

2.6.1 Irregular Grid (for the Boundary)



$$-\frac{2}{h^2} \cdot \left(\frac{u(x+e \cdot h, y) - u(x, y)}{e(e+w)} + \frac{u(x-w \cdot h, y) - u(x, y)}{w(e+w)} + \frac{u(x, y+n \cdot h) - u(x, y)}{n(n+s)} + \frac{u(x, y-s \cdot h) - u(x, y)}{s(n+s)} \right) = f(x, y)$$

or

$$-\frac{2}{h^2} \cdot \left(\frac{u(P_E) - u(P)}{e(e+w)} + \frac{u(P_W) - u(P)}{w(e+w)} + \frac{u(P_N) - u(P)}{n(n+s)} + \frac{u(P_S) - u(P)}{s(n+s)} \right) = f(x, y)$$

If $\Delta x, \Delta y$ are constant ($w \cdot h = e \cdot h, n \cdot h = s \cdot h$) and $h = 1$:

$$-\left(\frac{u(P_E) + u(P_W) - 2u(P)}{\Delta x^2} + \frac{u(P_N) + u(P_S) - 2u(P)}{\Delta y^2} \right) = f(x, y)$$

2.6.2 Neumann Boundary

For Neumann boundary conditions, the boundary points must also be calculated. In the figure, P , P_N , and P_S are on the boundary, P_E is inside, and P_W is outside of Ω . The

Neumann boundary condition in P is given: $\boxed{\frac{\partial u}{\partial n}(P) = g(P)}$

From the derivative $u_x(P) = \frac{\partial u}{\partial n}(P) = \frac{u(P_E) - u(P_W)}{2h}$, the outside point $u(P_W)$ can be calculated: $u(P_W) = u(P_E) - 2h \cdot u_x(P)$. Thus, it holds:

$$\boxed{\frac{2u(P_E) + u(P_N) + u(P_S) - 4u(P) - 2h \cdot u_x(P)}{h^2}}$$

If P_W and P_E are swapped, the sign is reversed: $u(P_W) = u(P_E) + 2h \cdot u_x(P)$.

Mirror Method:

If $u_x(x, y) = 0$, it is also referred to as the mirror method. Points P_W and P_E then have the same value ($P_W = P_E$).

2.7 FDM for Parabolic PDEs

Heat conduction equation: $\boxed{u_t(x, t) = u_{xx}(x, t)}$ $f(0) = f(1) = 0$ $\bar{\Omega} = [0, 1] \times [0, \infty]$

Boundary conditions: $u(x, 0) = f(x)$ $u(0, t) = u(1, t) = 0$ $x \in (0, 1)$ $t \in [0, \infty)$

2.7.1 Explicit Method (Richardson Method)

$$\frac{\tilde{u}(x, t + \Delta t) - \tilde{u}(x, t)}{\Delta t} = \frac{\tilde{u}(x + \Delta x, t) - 2\tilde{u}(x, t) + \tilde{u}(x - \Delta x, t)}{\Delta x^2} \quad \Delta x = \frac{1}{n} \quad \Delta t = \frac{r}{n^2} \quad r = \frac{\Delta t}{\Delta x^2}$$

Idea: From positions k , calculate $k + 1$: $\tilde{u}_{j,k+1} = r\tilde{u}_{j-1,k} + (1 - 2r)\tilde{u}_{j,k} + r\tilde{u}_{j+1,k}$

Discretization of t : $k, k + 1, \dots$

Discretization of x : $j, j + 1, \dots$


- Initialization, boundary condition: $\tilde{u}_{j,0} = f(j/n) \quad \tilde{u}_{0,k} = \tilde{u}_{n,k} = 0$

- Approximation matrix: $C^{(n)} = \text{tridiag}_{n-1}(r, 1 - 2r, r) = \begin{bmatrix} 1 - 2r & r & 0 & 0 & \dots \\ r & 1 - 2r & r & 0 & \dots \\ 0 & r & 1 - 2r & r & \dots \\ 0 & 0 & r & 1 - 2r & \dots \\ \vdots & \vdots & \vdots & \vdots & \ddots \end{bmatrix}$

- Calculate one step: $\tilde{u}^{(k+1)} = C^{(n)}\tilde{u}^{(k)}$

- Calculate k steps: $\tilde{u}^{(k)} = \{C^{(n)}\}^k \tilde{u}^{(0)}$

Convergence Behavior:

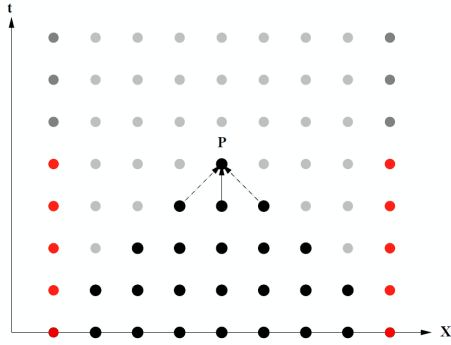

The method is stable if: $\|C^{(n)}\| < 1 \Rightarrow r < \frac{1}{2}$

This requires very small time steps, making the method impractical due to high computational capacity needs.

The reason for the poor convergence behavior can be visualized geometrically. The calculation of the value at node P includes the values of all nodes shaded in black. Only the 0-th level of the boundary values is considered.

To calculate the method with C^k for k steps, the red values (left and right) must be set to 0 (Boundary Condition). For the boundary vector $\tilde{u}^{(0)}$, only the lowest black 7 points are filled in.

2.7.2 Implicit Method

In contrast to the explicit method, which uses values from the previous time step, here a system of equations is solved globally.

$$\frac{\tilde{u}(x, t) - \tilde{u}(x, t - \Delta t)}{\Delta t} = \frac{\tilde{u}(x + \Delta x, t) - 2\tilde{u}(x, t) + \tilde{u}(x - \Delta x, t)}{\Delta x^2} \quad \Delta x = \frac{1}{n} \quad \Delta t = \frac{r}{n^2} \quad r = \frac{\Delta t}{\Delta x^2}$$

$$\tilde{u}_{j,k} = -r\tilde{u}_{j-1,k+1} + (1 + 2r)\tilde{u}_{j,k+1} - r\tilde{u}_{j+1,k+1}$$

Idea: Calculate derivatives using backward differences

- Initialization, boundary condition: $\tilde{u}_{j,0} = f(j/n) \quad \tilde{u}_{0,k} = \tilde{u}_{n,k} = 0$

- Approximation matrix: $E^{(n)} = \text{tridiag}_{n-1}(-r, 1 + 2r, -r) = \begin{bmatrix} 1 + 2r & -r & 0 & 0 & \dots \\ -r & 1 + 2r & -r & 0 & \dots \\ 0 & -r & 1 + 2r & -r & \dots \\ 0 & 0 & -r & 1 + 2r & \dots \\ \vdots & \vdots & \vdots & \vdots & \ddots \end{bmatrix}$

- Equation: $\tilde{u}^{(k)} = E^{(n)} \cdot \tilde{u}^{(k+1)}$

- Calculate one step: $\tilde{u}^{(k+1)} = \{E^{(n)}\}^{-1} \tilde{u}^{(k)}$

- Calculate k steps: $\tilde{u}^{(k)} = \{E^{(n)}\}^{-k} \tilde{u}^{(0)}$

Advantage: The implicit method is always stable, regardless of the time resolution Δt

Disadvantage: Requires expensive matrix inversion.

2.7.3 Crank-Nicolson Method (Mixed Method)

The idea of the Crank-Nicolson method is to average the two approximations

$$\frac{\tilde{u}(x, t + \Delta t) - \tilde{u}(x, t)}{\Delta t} = \frac{\tilde{u}(x + \Delta x, t) - 2\tilde{u}(x, t) + \tilde{u}(x - \Delta x, t)}{\Delta x^2}$$

$$\frac{\tilde{u}(x, t + \Delta t) - \tilde{u}(x, t)}{\Delta t} = \frac{\tilde{u}(x + \Delta x, t + \Delta t) - 2\tilde{u}(x, t + \Delta t) + \tilde{u}(x - \Delta x, t + \Delta t)}{\Delta x^2}$$

With this idea, the continuous problem is transformed into the following discrete problem:

$$-r\tilde{u}_{j-1,k+1} + (2+2r)\tilde{u}_{j,k+1} - r\tilde{u}_{j+1,k+1} = r\tilde{u}_{j-1,k} + (2-2r)\tilde{u}_{j,k} + r\tilde{u}_{j+1,k}$$

As with the other methods: $\Delta x = \frac{1}{n}$ $\Delta t = \frac{r}{n^2}$ $r = \frac{\Delta t}{\Delta x^2}$

- Initialization, boundary condition: $\tilde{u}_{j,0} = f(j/n)$ $\tilde{u}_{0,k} = \tilde{u}_{n,k} = 0$

- Approximation matrices:

$$F^{(n)} = E^{(n)} + I = \text{tridiag}_{n-1}(-r, 2+2r, -r) = \begin{bmatrix} 2+2r & -r & 0 & 0 & \dots \\ -r & 2+2r & -r & 0 & \dots \\ 0 & -r & 2+2r & -r & \dots \\ 0 & 0 & -r & 2+2r & \dots \\ \vdots & \vdots & \vdots & \vdots & \ddots \end{bmatrix}$$

$$G^{(n)} = C^{(n)} + I = \text{tridiag}_{n-1}(r, 2-2r, r) = \begin{bmatrix} 2-2r & r & 0 & 0 & \dots \\ r & 2-2r & r & 0 & \dots \\ 0 & r & 2-2r & r & \dots \\ 0 & 0 & r & 2-2r & \dots \\ \vdots & \vdots & \vdots & \vdots & \ddots \end{bmatrix}$$

- Equation: $F^{(n)} \cdot \tilde{u}^{(k+1)} = G^{(n)} \cdot \tilde{u}^{(k)}$
- Calculate one step: $\tilde{u}^{(k+1)} = \{F^{(n)}\}^{-1} \cdot G^{(n)} \cdot \tilde{u}^{(k)}$
- Calculate k steps: $\tilde{u}^{(k)} = \left(\{F^{(n)}\}^{-1} \cdot G^{(n)}\right)^k \cdot \tilde{u}^{(0)}$

2.8 FDM for Hyperbolic PDEs

$$u_{tt} = u_{xx} \rightarrow \text{homogeneous}$$

$$u_{tt} - u_{xx} = v(x, t) \rightarrow \text{inhomogeneous}$$

Initial conditions:

$$u(x, 0) = f(x) \quad u_t(x, 0) = g(x)$$

2.8.1 Leap-Frog Scheme

$$\tilde{u}_{j,k+1} = r^2\tilde{u}_{j-1,k} + 2(1-r^2)\tilde{u}_{j,k} + r^2\tilde{u}_{j+1,k} - \tilde{u}_{j,k-1} \quad r = \frac{\Delta t}{\Delta x}$$

$$\tilde{u}_{j,0} = f(j\Delta x) \quad \tilde{u}_{j,1} = f(j\Delta x) + g(j\Delta x)\Delta t + f''(j\Delta x)\frac{\Delta t^2}{2}$$

2.8.2 Transport Equation

$$u_x(x, t) + u_t(x, t) = 0 \quad u(x, 0) = f(x) \rightarrow u(x, t) = f(x - t)$$

Downwind Scheme

$$\frac{\tilde{u}(x, t + \Delta t) - \tilde{u}(x, t)}{\Delta t} + \frac{\tilde{u}(x + \Delta x, t) - \tilde{u}(x, t)}{\Delta x} = 0 \quad \tilde{u}_{j,k+1} = (1+r)\tilde{u}_{j,k} - r\tilde{u}_{j+1,k} \quad r = \frac{\Delta t}{\Delta x} \quad \text{Mostly Divergent}$$

Upwind Scheme

$$\frac{\tilde{u}(x, t + \Delta t) - \tilde{u}(x, t)}{\Delta t} + \frac{\tilde{u}(x, t) - \tilde{u}(x - \Delta x, t)}{\Delta x} = 0 \quad \tilde{u}_{j,k+1} = (1-r)\tilde{u}_{j,k} + r\tilde{u}_{j-1,k} \quad \text{Convergent for } r = \frac{\Delta t}{\Delta x} \leq 1$$

Centered Scheme

$$\frac{\tilde{u}(x, t + \Delta t) - \tilde{u}(x, t)}{\Delta t} + \frac{\tilde{u}(x + \Delta x, t) - \tilde{u}(x - \Delta x, t)}{2\Delta x} = 0 \quad \tilde{u}_{j,k+1} = -\frac{r}{2}\tilde{u}_{j+1,k} + \tilde{u}_{j,k} + \frac{r}{2}\tilde{u}_{j-1,k} \quad r = \frac{\Delta t}{\Delta x}$$

Lax-Wendroff Scheme

$$\tilde{u}_{j,k+1} = A\tilde{u}_{j+1,k} + B\tilde{u}_{j,k} + C\tilde{u}_{j-1,k} \quad r = \frac{\Delta t}{\Delta x} \quad A = \frac{r^2 - r}{2} \quad B = 1 - r^2 \quad C = \frac{r^2 + r}{2}$$

2.9 FVM (Finite Volume Method, Voronoi's Method)

$$\Delta u = 0 \quad \text{in } \Omega$$


$$u(x, y) = f(x, y) \quad \text{on } \partial\Omega$$

Gauss's theorem states:

$$\oint_{\Gamma} \Delta u(x, y) dx dy = \int_{\Gamma} \operatorname{div} \operatorname{grad} u(x, y) dx dy = \oint_{\partial\Gamma} \operatorname{grad} u(x, y) d\vec{n}$$

Where the boundary normal vector \vec{n} is always directed perpendicular to the outer region Γ .

$$\Rightarrow \oint_{\Gamma} \Delta u(x, y) dx dy = \oint_{\partial\Gamma} \operatorname{grad} u(x, y) d\vec{n} = 0$$




$$\frac{u(P_E) - u(P_P)}{h} \cdot h + \frac{u(P_N) - u(P_P)}{h} \cdot h + \frac{u(P_W) - u(P_P)}{h} \cdot h + \frac{u(P_S) - u(P_P)}{h} \cdot h \approx 0$$

$$\Rightarrow \tilde{u}(P_E) + \tilde{u}(P_N) + \tilde{u}(P_W) + \tilde{u}(P_S) - 4 \cdot \tilde{u}(P_P) = 0$$

Advantages:

- Allows computation with flow quantities and balances, thus avoiding the Laplace operator (Δ) and the associated complex mathematics.
- Can handle complicated geometries.

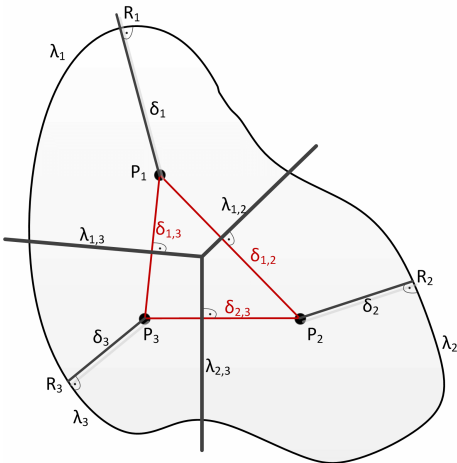

Procedure for Calculation:


1. Choose points P_1, \dots, P_n .
2. Divide the region into small subregions, e.g., by bisecting perpendiculars.
3. Discretize the boundary.

$$\text{For } P_i \text{ cell: } \sum_j \frac{u(P_{i,j}) - u(P_i)}{\delta_{i,j}} \cdot \lambda_{i,j} = 0$$

$$\text{For } P_1 \text{ cell: } \frac{\tilde{u}(P_2) - \tilde{u}(P_1)}{\delta_{1,2}} \cdot \lambda_{1,2} + \frac{\tilde{u}(P_3) - \tilde{u}(P_1)}{\delta_{1,3}} \cdot \lambda_{1,3} + \frac{\tilde{u}(R_1) - \tilde{u}(P_1)}{\delta_1} \cdot \lambda_1 = 0$$

$$\text{For } P_2 \text{ cell: } \frac{\tilde{u}(P_1) - \tilde{u}(P_2)}{\delta_{1,2}} \cdot \lambda_{1,2} + \frac{\tilde{u}(P_3) - \tilde{u}(P_2)}{\delta_{2,3}} \cdot \lambda_{2,3} + \frac{\tilde{u}(R_2) - \tilde{u}(P_2)}{\delta_2} \cdot \lambda_2 = 0$$


$$\text{For } P_3 \text{ cell: } \frac{\tilde{u}(P_2) - \tilde{u}(P_3)}{\delta_{2,3}} \cdot \lambda_{2,3} + \frac{\tilde{u}(P_1) - \tilde{u}(P_3)}{\delta_{1,3}} \cdot \lambda_{1,3} + \frac{\tilde{u}(R_3) - \tilde{u}(P_3)}{\delta_3} \cdot \lambda_3 = 0$$

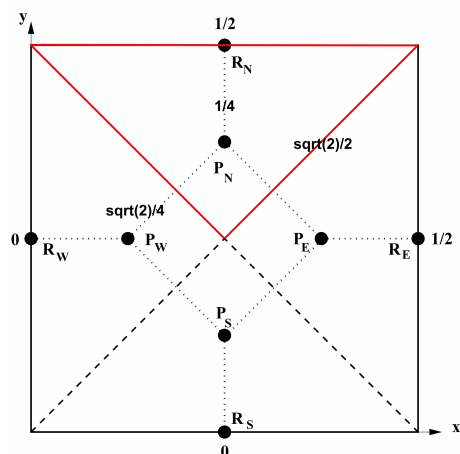

$$\frac{\tilde{u}(P_E) - \tilde{u}(P_N)}{1/4 \cdot \sqrt{2}} \cdot \frac{\sqrt{2}}{2} + \frac{\tilde{u}(P_W) - \tilde{u}(P_N)}{1/4 \cdot \sqrt{2}} \cdot \frac{\sqrt{2}}{2} + \frac{\tilde{u}(R_N) - \tilde{u}(P_N)}{1/4} \cdot 1 = 0$$

$$(\tilde{u}_E - \tilde{u}_N) \cdot 2 + (\tilde{u}_W - \tilde{u}_N) \cdot 2 + (1/2 - \tilde{u}_N) \cdot 4 = 0$$

$$0 \cdot \tilde{u}_S + 2 \cdot \tilde{u}_E + 2 \cdot \tilde{u}_W - 8 \cdot \tilde{u}_N + 2 = 0$$



Surface: $s_1 = s_2 = h$

$$u_1: \frac{u(b_1) - u(p_1)}{h/2} \cdot h + \frac{u(b_2) - u(p_1)}{h/2} \cdot h + \frac{u(b_3) - u(p_1)}{h/2} \cdot s_2 + \frac{u(p_2) - u(p_1)}{h} \cdot s_1$$


$$\text{Caution for quick calculations: } \frac{u(b_2) - u(p_1)}{h/2} \cdot h = (u(b_2) - u(p_1)) \cdot 2$$

example with $\Delta u(x, y) \neq 0$ and two voronoi points:

The function $u(x, y)$ is defined on the square $\Omega = [0, 3] \times [0, 3]$. The function $u(x, y)$ satisfies in Ω

$$\Delta u(x, y) + 4 = 0$$

and $u(x, y) = 0$ on the boundary of Ω . Determine approximate values for $u(1, 1)$ and $u(2, 2)$. Use finite volumes à la Voronoi with Voronoi-points $(1, 1)$ and $(2, 2)$



$$\frac{1}{2} \int_0^3 \int_0^3 -4 \, dx dy = -18$$

Function integrated over the voronoi cell example 68 in the script

$$\frac{0 - \tilde{u}_1}{1} \cdot 6 + \frac{\tilde{u}_2 - \tilde{u}_1}{\sqrt{2}} \cdot 3\sqrt{2} = -18$$

$$\frac{0 - \tilde{u}_2}{1} \cdot 6 + \frac{\tilde{u}_1 - \tilde{u}_2}{\sqrt{2}} \cdot 3\sqrt{2} = -18$$

$$A = \begin{bmatrix} -9 & 3 \\ 3 & -9 \end{bmatrix} \begin{pmatrix} \tilde{u}_1 \\ \tilde{u}_2 \end{pmatrix} = \begin{pmatrix} -18 \\ -18 \end{pmatrix}$$

3 FEM

The vector space \mathbb{V} has infinitely many dimensions. If we choose n independent functions v_1, \dots, v_n , then the functions $a_1 \cdot v_1(x) + \dots + a_n \cdot v_n(x)$ span an n -dimensional subspace $\mathbb{V}^{(n)}$ of \mathbb{V} . The following holds:

$$\tilde{u}^{(n)} = a_1 \cdot v_1(x) + \dots + a_n \cdot v_n(x)$$

3.1 The Method of Ritz

Ritz Matrix: $R^{(n)} = \begin{bmatrix} R_{1,1} & R_{1,2} & \cdots \\ R_{2,1} & R_{2,2} & \cdots \\ \vdots & \vdots & \ddots \end{bmatrix}$ with $R_{j,k}^{(n)} = \int_0^1 v_j'(x) \cdot v_k'(x) dx$

Ritz Vector: $r^{(n)} = \begin{bmatrix} r_1 \\ r_2 \\ \vdots \end{bmatrix}$ with $r_k^{(n)} = \int_0^1 f(x) \cdot v_k(x) dx$

Solution according to Ritz: $R^{(n)} \cdot a = r^{(n)} \Rightarrow a = \{R^{(n)}\}^{-1} \cdot r^{(n)}$

3.2 The Method of Galerkin

Galerkin Matrix: $G^{(n)} = \begin{bmatrix} G_{1,1} & G_{1,2} & \cdots \\ G_{2,1} & G_{2,2} & \cdots \\ \vdots & \vdots & \ddots \end{bmatrix}$ with $G_{j,k}^{(n)} = \int_0^1 \underbrace{(v_j''(x))}_{v_j \text{ in Form von DGL!}} \cdot v_k(x) dx$

Galerkin Vector: $g^{(n)} = \begin{bmatrix} g_1 \\ g_2 \\ \vdots \end{bmatrix}$ with $g_k^{(n)} = \int_0^1 f(x) \cdot v_k(x) dx$

Solution according to Galerkin: $G^{(n)} \cdot a + g^{(n)} = 0 \Rightarrow a = -\{G^{(n)}\}^{-1} \cdot g^{(n)}$ according to Ritz $G^{(n)} = -R^{(n)}$ $g^{(n)} = r^{(n)}$

The above matrix is only valid for the PDE $-u''(x) = f(x)$ with the ansatz $\tilde{u}(x) = a_1 \cdot v_1(x) + a_2 \cdot v_2(x)$. Otherwise, a system of equations for $v_k = v_1$ and v_2 must be established (example for ODE: $u''(x) + u(x) + x = 0$):

$$\int_0^1 (a_1 \cdot v_1''(x) + a_2 \cdot v_2''(x) + a_1 \cdot v_1(x) + a_2 \cdot v_2(x) + x) \cdot v_k(x) dx = 0 \rightarrow G_{j,k}^{(n)} = \int_0^1 (v_j''(x) + v_j(x)) \cdot v_k(x) dx$$

3.3 Weighted Residuals

Weighting functions: $\{w_1(x), \dots, w_n(x)\}$

Matrix (weighted residuals): $M^{(n)} = \begin{bmatrix} M_{1,1} & M_{1,2} & \cdots \\ M_{2,1} & M_{2,2} & \cdots \\ \vdots & \vdots & \ddots \end{bmatrix}$ with $M_{j,k}^{(n)} = \int_0^1 v_j''(x) \cdot w_k(x) dx$

Vector (weighted residuals): $m^{(n)} = \begin{bmatrix} m_1 \\ m_2 \\ \vdots \end{bmatrix}$ with $m_k^{(n)} = \int_0^1 f(x) \cdot w_k(x) dx$

Solution of the weighted residuals: $M^{(n)} \cdot a + m^{(n)} = 0 \Rightarrow a = -\{M^{(n)}\}^{-1} \cdot m^{(n)}$

3.4 Point Collocation

In the context of point collocation (individual points must match between the true result and the approximation), n support points are chosen in the interval $[0, 1]$.

$$\begin{bmatrix} v_1''(x_1) & v_2''(x_1) & \cdots \\ v_1''(x_2) & v_2''(x_2) & \cdots \\ \vdots & \vdots & \ddots \end{bmatrix} \cdot \begin{bmatrix} a_1 \\ a_2 \\ \vdots \end{bmatrix} = \begin{bmatrix} -f(x_1) \\ -f(x_2) \\ \vdots \end{bmatrix} \quad \text{Solve the system of equations for } a$$

The above matrix is only valid for the PDE $-u''(x) = f(x)$ with the ansatz $\tilde{u}(x) = a_1 \cdot v_1(x) + a_2 \cdot v_2(x)$. Otherwise, the differential equation (DE) must be formulated with the trial functions, and substituted at both points to determine a_1 and a_2 :

DE: $u''(x) + u(x) = -x \Rightarrow$ Equation at Point 1: $a_1 \cdot v_1''(x_1) + a_2 \cdot v_2''(x_1) + a_1 \cdot v_1(x_1) + a_2 \cdot v_2(x_1) = -x_1$

3.5 Domain Collocation

In contrast to point collocation, entire domains (intervals I_k) rather than individual points must match. For $-u''(x) = f(x)$, this system of equations is set up.

$$\begin{bmatrix} \int_{I_1} v_1'' & \int_{I_1} v_2'' & \cdots \\ \int_{I_2} v_1'' & \int_{I_2} v_2'' & \cdots \\ \vdots & \vdots & \ddots \end{bmatrix} \cdot \begin{bmatrix} a_1 \\ a_2 \\ \vdots \end{bmatrix} = \begin{bmatrix} -\int_{I_1} f(x) \\ -\int_{I_2} f(x) \\ \vdots \end{bmatrix} \quad \text{Solve the system of equations for a}$$

3.6 Gauss's Method (MSE)

$$\text{Gauss Matrix: } Q^{(n)} = \begin{bmatrix} Q_{1,1} & Q_{1,2} & \cdots \\ Q_{2,1} & Q_{2,2} & \cdots \\ \vdots & \vdots & \ddots \end{bmatrix} \quad \text{with} \quad Q_{j,k}^{(n)} = \int_0^1 v_j''(x) \cdot v_k''(x) dx$$

$$\text{Gauss Vector: } q^{(n)} = \begin{bmatrix} q_1 \\ q_2 \\ \vdots \end{bmatrix} \quad \text{with} \quad q_k^{(n)} = \int_0^1 f(x) \cdot v_k''(x) dx$$

$$\text{Solution according to Gauss: } Q^{(n)} \cdot a + q^{(n)} = 0 \quad \Rightarrow \quad a = -\{Q^{(n)}\}^{-1} \cdot q^{(n)}$$

3.7 Finite Elements

The discussed methods assume the choice of a set $v_1(x), \dots, v_n(x)$ of basic functions. In FEM, local supports (basic functions) are used, which are non-zero only on a small interval. The advantage of this approach is that in a given region, only one support influences the approximation function. The disadvantage lies in the high number of required supports.

IMPORTANT: All methods are presented with a discretization of $h = 1/3$.

3.7.1 Node Variables

First, on the interval $[0, 1]$, n nodes, usually uniformly distributed, are introduced.

This divides the interval $[0, 1]$ into subintervals (meshes).

For $n = 3$: $I_1 = [0, 1/3]$ $I_2 = [1/3, 2/3]$ $I_3 = [2/3, 1]$

Next, each node x_k is assigned an approximation variable (node variable).


$$\text{Approximation: } \tilde{u}(0) = a_0 \quad \tilde{u}(1/3) = a_1 \quad \tilde{u}(2/3) = a_2 \quad \tilde{u}(1) = a_3$$

$$v_0(0) = 1 \quad v_0(1/3) = 0 \quad v_0(2/3) = 0 \quad v_0(1) = 0$$

$$\text{Additional conditions: } v_1(0) = 0 \quad v_1(1/3) = 1 \quad v_1(2/3) = 0 \quad v_1(1) = 0$$

$$v_2(0) = 0 \quad v_2(1/3) = 0 \quad v_2(2/3) = 1 \quad v_2(1) = 0$$

$$v_3(0) = 0 \quad v_3(1/3) = 0 \quad v_3(2/3) = 0 \quad v_3(1) = 1$$

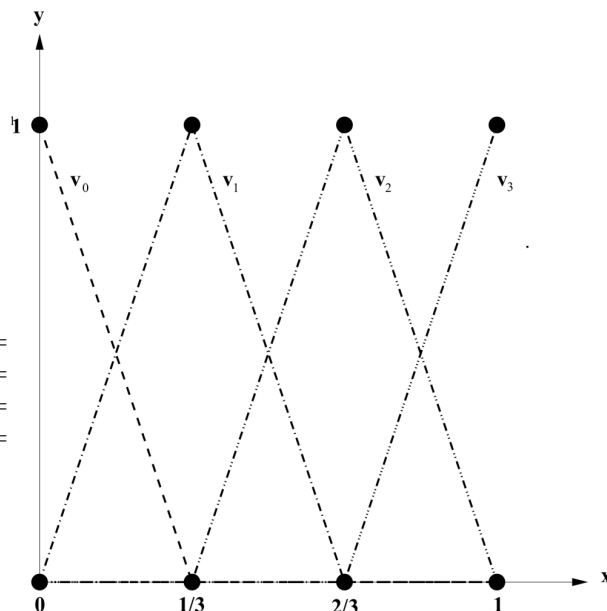

3.7.2 Shape Functions

The local basic functions are intended to be composed of sections of simpler functions, such as polynomials, defined only on a single mesh.

Two possible shape functions are, for example, $l_1(x) = 1 - x$ and $l_2(x) = x$.

$t \in$	$[0, 1/3]$	$[1/3, 2/3]$	$[2/3, 1]$		$t \in$	$[0, 1/3]$	$[1/3, 2/3]$	$[2/3, 1]$
$v_0 =$	$1 - 3x$	0	0	\Rightarrow	$v_0 =$	$l_1(3x)$	0	0
$v_1 =$	$3x$	$2 - 3x$	0		$v_1 =$	$l_2(3x)$	$l_1(3x - 1)$	0
$v_2 =$	0	$-1 + 3x$	$3 - 3x$		$v_2 =$	0	$l_2(3x - 1)$	$l_1(3x - 2)$
$v_3 =$	0	0	$-2 + 3x$		$v_3 =$	0	0	$l_2(3x - 2)$

3.7.3 Element Matrices

In principle, the approximation variable can be determined by any method. Because in a linear approximation function, the second derivative is trivial ($= 0$), the choice of the Ritz method is enforced.

The integrals are evaluated element-wise:

$$\int_0^1 = \int_0^{1/3} + \int_{1/3}^{2/3} + \int_{2/3}^1$$

This approach calculates the Ritz matrix for each mesh individually and then sums them up to form the global Ritz matrix:

$$R^{(4)} = R^{(4,1)} + R^{(4,2)} + R^{(4,3)} = \begin{bmatrix} * & * & 0 & 0 \\ * & * & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} + \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & * & * & 0 \\ 0 & * & * & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} + \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & * & * \\ 0 & 0 & * & * \end{bmatrix}$$

The 2×2 matrices marked with $*$ are called mesh matrices:

$$M^{(4,1)} = M^{(4,2)} = M^{(4,3)} = \begin{bmatrix} * & * \\ * & * \end{bmatrix} = 3 \cdot \begin{bmatrix} -1 & 1 \\ 1 & -1 \end{bmatrix} \Rightarrow \boxed{M = \frac{1}{h} \cdot \underbrace{\begin{bmatrix} -1 & 1 \\ 1 & -1 \end{bmatrix}}_{\mathbf{E}: \text{Element matrix}} = \frac{1}{h} \cdot \mathbf{E}}$$

The element matrix is now inserted into the corresponding Ritz matrix and superimposed. For the quantization of $h = 1/3$, we get:

$$R^4 = \begin{bmatrix} -3 & 3 & 0 & 0 \\ 3 & -3 & 3 & 0 \\ 0 & 3 & -3 & 3 \\ 0 & 0 & 3 & -3 \end{bmatrix} = \begin{bmatrix} -3 & 3 & 0 & 0 \\ 3 & -6 & 3 & 0 \\ 0 & 3 & -6 & 3 \\ 0 & 0 & 3 & -3 \end{bmatrix}$$

The Ritz vector must be calculated by integration:

$$r^4 = \begin{bmatrix} \int_0^1 f(x) \cdot v_0(x) dx \\ \int_0^1 f(x) \cdot v_1(x) dx \\ \int_0^1 f(x) \cdot v_2(x) dx \\ \int_0^1 f(x) \cdot v_3(x) dx \end{bmatrix}$$

$$\text{The corresponding Ritz equation system is: } \boxed{R^4 \cdot a + r^4 = 0} \Rightarrow a = -\{R^4\}^{-1} \cdot r^4$$

Initial conditions: The initial conditions a_0 and a_n can be directly substituted.

$$a_0 = 10 \quad a_3 = 20$$

$$\begin{bmatrix} 3 & -6 & 3 & 0 \\ 0 & 3 & -6 & 3 \end{bmatrix} \cdot \begin{bmatrix} 10 \\ a_1 \\ a_2 \\ 20 \end{bmatrix} + r^4 = 0 \Rightarrow \begin{bmatrix} -6 & 3 \\ 3 & -6 \end{bmatrix} \cdot \begin{bmatrix} a_1 \\ a_2 \end{bmatrix} + \begin{bmatrix} 30 \\ 60 \end{bmatrix} + r^4 = 0$$

$$\begin{bmatrix} a_1 \\ a_2 \end{bmatrix} = \begin{bmatrix} -6 & 3 \\ 3 & -6 \end{bmatrix}^{-1} \cdot \begin{bmatrix} - (r_1^4 + 3 \cdot a_0) \\ - (r_2^4 + 3 \cdot a_3) \end{bmatrix}$$

3.7.4 Finite Element Manual Calculation

Problem statement: $u''(x) + f(x) = 0 \quad f(x) = 20 \quad u(0) = 10 \quad u(1) = 20$


The approximation should be performed on the **NON**-uniform intervals: $[0, 1/6]$, $[1/6, 1/2]$, $[1/2, 1]$

The corresponding element matrices \mathbf{E} are:

$$\frac{1}{1/6} \begin{bmatrix} -1 & 1 \\ 1 & -1 \end{bmatrix} = \begin{bmatrix} -6 & 6 \\ 6 & -6 \end{bmatrix} \quad \frac{1}{1/2-1/6} \begin{bmatrix} -1 & 1 \\ 1 & -1 \end{bmatrix} = \begin{bmatrix} -3 & 3 \\ 3 & -3 \end{bmatrix} \quad \frac{1}{1-1/2} \begin{bmatrix} -1 & 1 \\ 1 & -1 \end{bmatrix} = \begin{bmatrix} -2 & 2 \\ 2 & -2 \end{bmatrix}$$

The Ritz Vector and the Ritz Matrix are:

$$R^n = \begin{bmatrix} -6 & 6 & 0 & 0 \\ 6 & -9 & 3 & 0 \\ 0 & 3 & -5 & 2 \\ 0 & 0 & 2 & -2 \end{bmatrix}$$
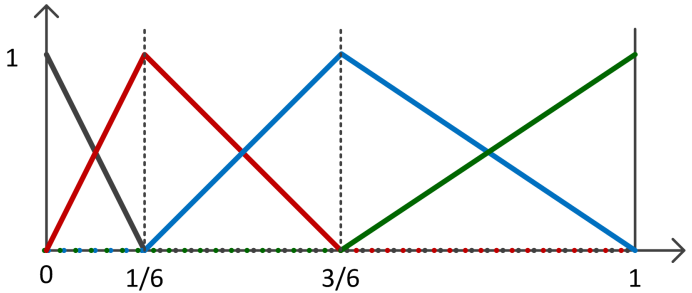
$$r^n = \begin{bmatrix} \int_0^{1/6} f(x) \cdot (1-6x) dx \\ \int_0^{1/6} f(x) \cdot (6x) + \int_{1/6}^{3/6} f(x) \cdot (3/2-3x) dx \\ \int_{1/6}^{3/6} f(x) \cdot (3x-1/2) + \int_{3/6}^1 f(x) \cdot (2-2x) dx \\ \int_{1/2}^1 f(x) \cdot (2x-1) dx \end{bmatrix} = \begin{bmatrix} 5/3 \\ 5 \\ 25/3 \\ 5 \end{bmatrix}$$


$$R^n \cdot a + r^n = 0 \Rightarrow \begin{bmatrix} -6 & 6 & 0 & 0 \\ 6 & -9 & 3 & 0 \\ 0 & 3 & -5 & 2 \\ 0 & 0 & 2 & -2 \end{bmatrix} \cdot \begin{bmatrix} 10 \\ a_1 \\ a_2 \\ 20 \end{bmatrix} + \begin{bmatrix} 5/3 \\ 5 \\ 25/3 \\ 5 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix} \Rightarrow \begin{bmatrix} 6 & -9 & 3 & 0 \\ 0 & 3 & -5 & 2 \end{bmatrix} \cdot \begin{bmatrix} a_1 \\ a_2 \\ 20 \end{bmatrix} + \begin{bmatrix} 5/3 \\ 5 \\ 25/3 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$$

$$\Rightarrow \begin{bmatrix} -9 & 3 \\ 3 & -5 \end{bmatrix} \cdot \begin{bmatrix} a_1 \\ a_2 \end{bmatrix} + \begin{bmatrix} 6 \cdot 10 \\ 2 \cdot 20 \end{bmatrix} + \begin{bmatrix} 5 \\ 25/3 \end{bmatrix} = 0 \Rightarrow \begin{bmatrix} -9 & 3 \\ 3 & -5 \end{bmatrix} \cdot \begin{bmatrix} a_1 \\ a_2 \end{bmatrix} = \begin{bmatrix} -65 \\ -145/3 \end{bmatrix} \Rightarrow \begin{bmatrix} a_1 \\ a_2 \end{bmatrix} = \begin{bmatrix} 235/18 \\ 35/2 \end{bmatrix}$$

$$\Rightarrow \tilde{u}(x) = 10 \cdot v_0(x) + \frac{235}{18} v_1(x) + \frac{35}{2} \cdot v_2(x) + 20 \cdot v_3(x) =$$

3.7.5 h-Strategy

The basic idea of the h-strategy is to refine the resolution. In other words, the mesh width h is reduced. To cover the entire range, more meshes are required.

3.7.6 p-Strategy

With the p-strategy, the mesh remains unchanged. The trial functions should now be composed of higher-order polynomials, and new nodes and node variables are introduced.

Problem statement: $u''(x) + f(x) = 0 \quad u(0) = a_0 \quad u(1) = a_6$


The approximation should apply to the equally spaced intervals: $[0, 1/3]$, $[1/3, 2/3]$, $[2/3, 1]$

Shape functions:

$x \in$	$[0, 1/3]$	$[1/3, 2/3]$	$[2/3, 1]$
$q_1(x) = (1-x) \cdot (1-2x)$	$q_1(3x)$	0	0
$q_2(x) = 4x \cdot (1-x)$	$q_2(3x)$	0	0
$q_3(x) = -x \cdot (1-2x)$	$q_3(3x)$	$q_1(3x-1)$	0
	$v_3 = 0$	$q_2(3x-1)$	0
	$v_4 = 0$	$q_3(3x-1)$	$q_1(3x-2)$
	$v_5 = 0$	0	$q_2(3x-2)$
	$v_6 = 0$	0	$q_3(3x-2)$

Element matrix:

$$E = \frac{1}{3} \begin{bmatrix} -7 & 8 & -1 \\ 8 & -16 & 8 \\ -1 & 8 & -7 \end{bmatrix}$$

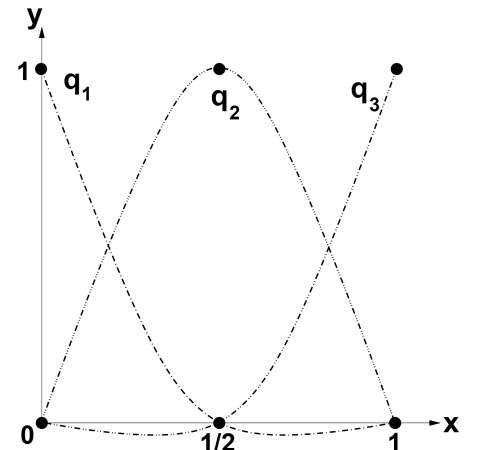

$$\underbrace{\begin{bmatrix} -7 & 8 & -1 & 0 & 0 & 0 & 0 \\ 8 & -16 & 8 & 0 & 0 & 0 & 0 \\ -1 & 8 & -14 & 8 & -1 & 0 & 0 \\ 0 & 0 & 8 & -16 & 8 & 0 & 0 \\ 0 & 0 & -1 & 8 & -14 & 8 & -1 \\ 0 & 0 & 0 & 0 & 8 & -16 & 8 \\ 0 & 0 & 0 & 0 & -1 & 8 & -7 \end{bmatrix}}_{\text{Ritz Matrix } R^{(8)} \text{ for } h=1/3} \cdot \underbrace{\begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \\ a_4 \\ a_5 \\ a_6 \end{bmatrix}}_{\text{Ritz Vector } r^{(8)} \text{ for } h=1/3} + \underbrace{\begin{bmatrix} \int_0^1 f(x) \cdot v_0(x) dx \\ \int_0^1 f(x) \cdot v_1(x) dx \\ \int_0^1 f(x) \cdot v_2(x) dx \\ \int_0^1 f(x) \cdot v_3(x) dx \\ \int_0^1 f(x) \cdot v_4(x) dx \\ \int_0^1 f(x) \cdot v_5(x) dx \\ \int_0^1 f(x) \cdot v_6(x) dx \end{bmatrix}}_{\text{Ritz Vector } r^{(8)} \text{ for } h=1/3} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

Advantage of the p-Strategy over the h-Strategy: In both strategies, the dimension of the system matrices increases. However, there is a justified hope that the increase required to achieve comparable accuracy is much smaller with the p-strategy than with the h-strategy.

3.8 Conformity and Completeness

If the approximate solution must now be differentiable twice, the approach of the last section is no longer considered conforming.

To ensure single differentiability at the nodes, new basic functions must be found.

$$\tilde{u}(x) = a_0 v_0(x) + a_1 v_1(x) + a_2 v_2(x) + a_3 v_3(x) + \tilde{a}_0 \tilde{v}_0(x) + \tilde{a}_1 \tilde{v}_1(x) + \tilde{a}_2 \tilde{v}_2(x) + \tilde{a}_3 \tilde{v}_3(x)$$


Two basic functions ensure the correct value at the nodes. Two additional basic functions are needed to ensure the first derivative (slope) at the transition nodes; they ensure the completeness of the basic functions. (Without the two additional basic functions, only a slope of zero would be possible at the transition nodes.)

3.9 Hermite Polynomials of Third Order

Agreement up to the 1st derivative at the nodes

$$\textbf{Problem statement: } u''(x) + f(x) = 0 \quad u(0) = a_0 \quad u'(0) = \tilde{a}_0 \quad u(1) = a_3 \quad u'(1) = \tilde{a}_3$$

The approximation should apply to the equally spaced intervals: $[0, 1/3]$, $[1/3, 2/3]$, $[2/3, 1]$

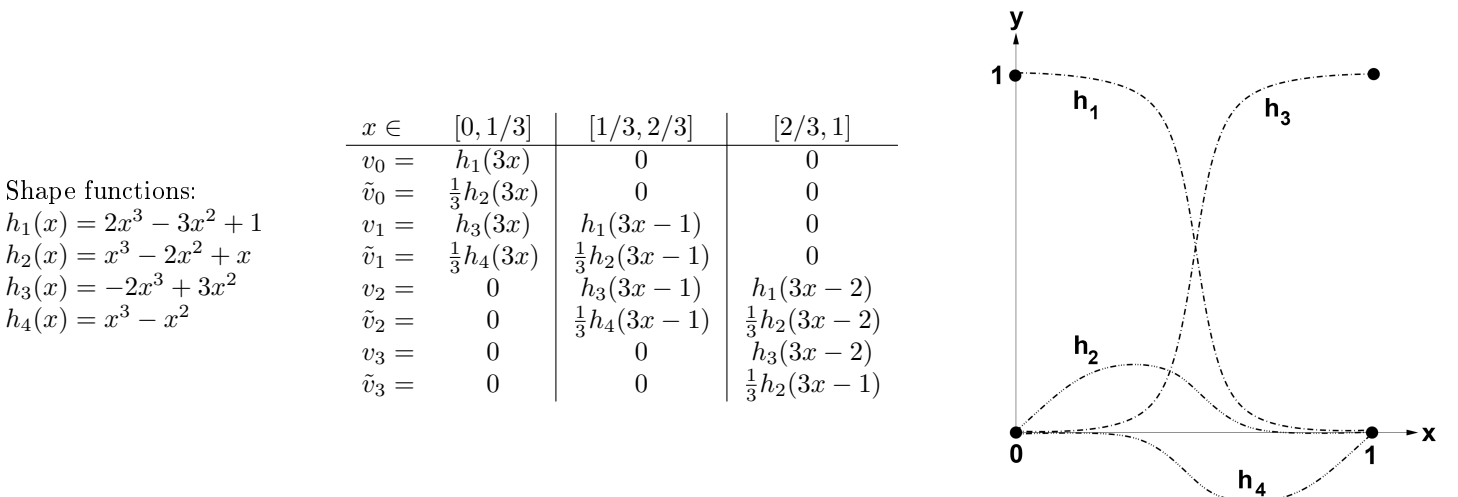

$$\begin{aligned}
E = \frac{1}{30} \begin{bmatrix} -36 & -3 & 36 & -3 \\ -3 & -4 & 3 & 1 \\ 36 & 3 & -36 & 3 \\ -3 & 1 & 3 & -4 \end{bmatrix} &\Rightarrow M = \frac{1}{30 \cdot h} \begin{bmatrix} -36 & -3 \cdot h & 36 & -3 \cdot h \\ -3 \cdot h & -4 \cdot h^2 & 3 \cdot h & 1 \cdot h^2 \\ 36 & 3 \cdot h & -36 & 3 \cdot h \\ -3 \cdot h & 1 \cdot h^2 & 3 \cdot h & -4 \cdot h^2 \end{bmatrix} \\
\frac{3}{30} \underbrace{\begin{bmatrix} -36 & -1 & 36 & -1 & 0 & 0 & 0 & 0 \\ -1 & -4/9 & 1 & 1/9 & 0 & 0 & 0 & 0 \\ 36 & 1 & -72 & 0 & 36 & -1 & 0 & 0 \\ -1 & 1/9 & 0 & -8/9 & 1 & 1/9 & 0 & 0 \\ 0 & 0 & 36 & 1 & -72 & 0 & 36 & -1 \\ 0 & 0 & -1 & 1/9 & 0 & -8/9 & 1 & 1/9 \\ 0 & 0 & 0 & 0 & 36 & 1 & -36 & 1 \\ 0 & 0 & 0 & 0 & -1 & 1/9 & 1 & -4/9 \end{bmatrix}}_{\text{Ritz Matrix } R^{(8)} \text{ for } h=1/3} \cdot \begin{bmatrix} a_0 \\ \tilde{a}_0 \\ a_1 \\ \tilde{a}_1 \\ a_2 \\ \tilde{a}_2 \\ a_3 \\ \tilde{a}_3 \end{bmatrix} + \underbrace{\begin{bmatrix} \int_0^1 f(x) \cdot v_0(x) dx \\ \int_0^1 f(x) \cdot \tilde{v}_0(x) dx \\ \int_0^1 f(x) \cdot v_1(x) dx \\ \int_0^1 f(x) \cdot \tilde{v}_1(x) dx \\ \int_0^1 f(x) \cdot v_2(x) dx \\ \int_0^1 f(x) \cdot \tilde{v}_2(x) dx \\ \int_0^1 f(x) \cdot v_3(x) dx \\ \int_0^1 f(x) \cdot \tilde{v}_3(x) dx \end{bmatrix}}_{\text{Ritz Vector } r^{(8)} \text{ for } h=1/3} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}
\end{aligned}$$

4 Fourier Series

Complex:

$$f(t) = \sum_{k=-\infty}^{\infty} c_k \cdot e^{jk\omega_f t} = \sum_{k=0}^{\infty} (c_k \cdot e^{jk\omega_f t} + \bar{c}_k \cdot e^{-jk\omega_f t}) \quad c_k = \bar{c}_{-k} = \frac{1}{T} \int_0^T f(t) \cdot e^{-jk\omega_f t} dt$$

Real:

$$f(t) = \frac{a_0}{2} + \sum_{k=1}^{\infty} [a_k \cos(k\omega_f t) + b_k \sin(k\omega_f t)] = \frac{A_0}{2} + \sum_{k=1}^{\infty} A_k \cos(k\omega_f t + \varphi_k) \quad k \in \mathbb{Z}$$

$$a_0 = \frac{2}{T} \int_0^T f(t) dt, \quad a_k = \frac{2}{T} \int_0^T f(t) \cos(k\omega_f t) dt, \quad b_k = \frac{2}{T} \int_0^T f(t) \sin(k\omega_f t) dt \quad \omega_f = \frac{2\pi}{T} = 2\pi f$$

a_0, c_0, A_0 are constants, ω_f is the fundamental frequency, a_k and b_k are the real coefficients, c_k is the complex coefficient, A_k is the amplitude, and φ_k is the phase.

$a_k = c_k + \bar{c}_k = 2\operatorname{Re}(c_k) = A_k \cos(\varphi_k)$	$b_k = j(c_k - \bar{c}_k) = -2\operatorname{Im}(c_k) = -A_k \sin(\varphi_k)$
$c_k = \frac{a_k - jb_k}{2} = \frac{A_k}{2} e^{j\varphi_k}$	$c_{-k} = \bar{c}_k = \frac{a_k + jb_k}{2} = \frac{A_k}{2} e^{-j\varphi_k}$
$A_k = 2 c_k = \sqrt{a_k^2 + b_k^2}$	

Calculation of φ_k from a_k and b_k


$a_k > 0$:	$\varphi_k = -\arctan(\frac{b_k}{a_k})$	$a_k < 0$:	$\varphi_k = -\arctan(\frac{b_k}{a_k}) + \pi$
$a_k = 0; b_k > 0$:	$\varphi_k = -\frac{\pi}{2}$	$a_k = 0; b_k < 0$:	$\varphi_k = \frac{\pi}{2}$
$a_k = b_k = 0$:	$\varphi_k = \text{not defined}$		$\varphi_k = \arg(c_k)$

4.1 Symmetry


even function	odd function	half period 1	half period 2
$f(-t) = f(t)$ $b_k = 0$ $a_k = \frac{2}{T} \int_0^{\frac{T}{2}} f(t) \cdot \cos(k\omega_f t) dt$	$f(-t) = -f(t)$ $a_k = 0$ $b_k = \frac{2}{T} \int_0^{\frac{T}{2}} f(t) \cdot \sin(k\omega_f t) dt$	$f(t) = f(t + \pi)$ $a_{2k+1} = 0$ $b_{2k+1} = 0$	$f(t) = -f(t + \pi)$ $a_{2k} = 0$ $b_{2k} = 0$

4.2 Spectra


Cosine-Sine Amplitude Spectrum

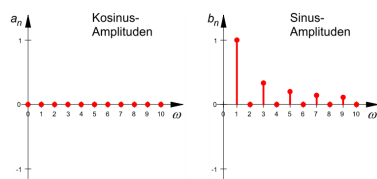

Single-sided Amplitude/Phase Spectrum

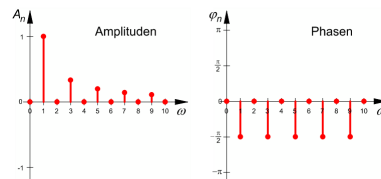

Two-sided Amplitude/Phase Spectrum

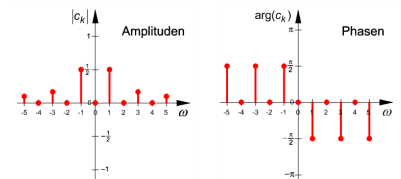

The one-sided and two-sided spectra differ only in the amplitude diagram. The phase diagram for positive k is identical. The amplitude values are distributed evenly between positive and negative k .

5 Fourier Transform

$$\boxed{f(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega) e^{j\omega t} d\omega} = \frac{1}{2\pi} \int_{-\infty}^{\infty} [R(\omega) \cos(\omega t) + X(\omega) \sin(\omega t)] d\omega + \frac{j}{2\pi} \int_{-\infty}^{\infty} [R(\omega) \sin(\omega t) - X(\omega) \cos(\omega t)] d\omega$$

$$\boxed{F(\omega) = \int_{-\infty}^{\infty} f(t) e^{-j\omega t} dt} = R(\omega) - jX(\omega) \quad R(\omega) = \int_{-\infty}^{\infty} f(t) \cos(\omega t) dt \quad \text{and} \quad X(\omega) = \int_{-\infty}^{\infty} f(t) \sin(\omega t) dt$$

$$\begin{aligned} \sigma(t) \circ \bullet \frac{1}{j\omega} + \pi \cdot \delta(\omega) & \qquad \frac{1}{\pi \cdot t} \circ \bullet -j \cdot \operatorname{sgn}(\omega) \\ 1 \circ \bullet 2\pi \cdot \delta(t) \quad \underbrace{\longleftrightarrow}_{\text{Careful}} \quad \delta(\omega) \circ \bullet 1 & \qquad \operatorname{sgn}(t) \circ \bullet \frac{2}{j\omega} \end{aligned}$$

5.1 Properties

Fourier integral exists if $\int_{-\infty}^{\infty} |f(t)| dt < \infty$

Linearity	$\alpha \cdot f(t) + \beta \cdot g(t)$	$\circ \bullet$	$\alpha \cdot F(\omega) + \beta \cdot G(\omega)$
Time reversal (reflection at the y-axis)	$f(-t)$	$\circ \bullet$	$F(-\omega) = F^*(\omega)$
Similarity	$f(\alpha t)$	$\circ \bullet$	$\frac{1}{ \alpha } F\left(\frac{\omega}{\alpha}\right) \quad \alpha \in \mathbb{R} \setminus \{0\}$
Time-domain shift	$f(t \pm t_0)$	$\circ \bullet$	$F(\omega) e^{\pm j\omega t_0}$
Frequency-domain shift	$f(t) e^{\pm j\omega_0 t}$	$\circ \bullet$	$F(\omega \mp \omega_0)$
Time-domain differentiation	$\frac{\partial^n f(t)}{\partial t^n}$	$\circ \bullet$	$(j\omega)^n F(\omega)$
Time-domain integration	$\int_{-\infty}^t f(\tau) d\tau$	$\circ \bullet$	$\frac{F(\omega)}{j\omega} + \pi F(0) \delta(\omega)$
Frequency-domain differentiation	$t^n f(t)$	$\circ \bullet$	$j^n \frac{\partial F(\omega)}{\partial \omega^n}$
Time-domain convolution	$f(t) * g(t)$	$\circ \bullet$	$F(\omega) \cdot G(\omega)$
Frequency-domain convolution	$f(t) \cdot g(t)$	$\circ \bullet$	$\frac{1}{2\pi} F(\omega) * G(j\omega)$
Exchange theorem (Duality)	$f(t)$	$\circ \bullet$	$F(\omega)$
	$F(t)$	$\circ \bullet$	$2\pi \cdot f(-\omega)$
Modulation	$\cos(\alpha t) \cdot f(t)$	$\circ \bullet$	$\frac{1}{2} \cdot [F(\omega - \alpha) + F(\omega + \alpha)]$
	$\sin(\alpha t) \cdot f(t)$	$\circ \bullet$	$\frac{1}{2j} \cdot [F(\omega - \alpha) - F(\omega + \alpha)]$
Parseval's Theorem	$\int_{-\infty}^{\infty} f(t) g^*(t) dt$	$=$	$\frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega) G^*(\omega) d\omega$
Bessel's Theorem	$\int_{-\infty}^{\infty} f(t) ^2 dt$	$=$	$\frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega) ^2 d\omega$
Initial values	$f(0) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega) d\omega$		$F(0) = \int_{-\infty}^{\infty} f(t) dt$
Infinite sequence of δ -impulses	$\sum_{n=-\infty}^{\infty} \delta(t - n \cdot t_0)$	$\circ \bullet$	$\sum_{n=-\infty}^{\infty} \frac{2\pi}{t_0} \delta(\omega - n \cdot \frac{2\pi}{t_0})$

6 Laplace Transformation

$$F(s) = \int_0^{\infty} f(t)e^{-st} dt \quad s = \sigma + j\omega$$

- Applicable only for **causal** systems $t \geq 0$
- Integrable over the interval $(0, \infty)$
- Growth less than that of an exponential function $\sigma > 0$
- σ is the damping factor: $e^{-s} = e^{-\sigma} \cdot e^{-j\omega}$
- Fourier-transform $F(\omega)$ can be expressed through Laplace transformation $F(s)$.
- Fourier \longleftrightarrow Laplace transformations only if there is a pole ($\sigma > 0$), i.e., to the left of the $j\omega$ axis and causal!
- $f(0+)$: Corresponds to the initial condition at a time greater than 0 (causal).

6.1 Properties

Linearity	$\alpha \cdot f(t) + \beta \cdot g(t)$	$\circ \bullet$	$\alpha \cdot F(s) + \beta \cdot G(s)$
Time-domain shift	$f(t \pm t_0)$	$\circ \bullet$	$F(s)e^{\pm t_0 s}$
Damping (Frequency-domain shift)	$f(t)e^{\mp \alpha t}$	$\circ \bullet$	$F(s \pm \alpha)$
Similarity	$f(\alpha t)$	$\circ \bullet$	$\frac{1}{\alpha} F\left(\frac{s}{\alpha}\right) \quad 0 < \alpha \in \mathbb{R}$
Time-domain convolution	$f(t) * g(t)$	$\circ \bullet$	$F(s) \cdot G(s)$
Frequency-domain convolution	$f(t) \cdot g(t)$	$\circ \bullet$	$\frac{1}{2\pi j} F(s) * G(s)$
Time-domain differentiation	$f'(t)$	$\circ \bullet$	$sF(s) - f(0+)$
	$f''(t)$	$\circ \bullet$	$s^2 F(s) - sf(0+) - f'(0+)$
	$f^{(n)}(t)$	$\circ \bullet$	$s^n F(s) - s^{n-1}f(0+) - s^{n-2}f'(0+) - \dots - sf^{(n-2)}(0+) - f^{(n-1)}(0+)$
Frequency-domain differentiation	$(-t)^n f(t)$	$\circ \bullet$	$F^{(n)}(s)$
Integration	$\int_0^t f(\tau) d\tau$	$\circ \bullet$	$\frac{F(s)}{s}$
Initial value	$\lim_{t \rightarrow 0} f(t)$ muss exist.	$=$	$\lim_{s \rightarrow \infty} sF(s)$
Final value	$\lim_{t \rightarrow \infty} f(t)$ muss exist.	$=$	$\lim_{s \rightarrow 0} sF(s)$

6.2 From Laplace to Fourier

$s \rightarrow j\omega$ This can only be done if the pole ($\sigma > 0$) is to the left of the $j\omega$ -axis and the system is causal.

6.3 Inverse Transformation (Complex Integration)

$$f(t) = \int_{x-j\infty}^{x+j\infty} F(s) \cdot e^{st} \cdot ds$$

6.4 Procedure for Inverse Transformation

1. Approach Attempt to make the numerator have the same denominator as the denominator and then simplify (corrections m)
2. Approach Partial fraction decomposition

6.5 Inverse Transformation via Table

σ = Step function. When 1 is transformed, σ should be taken (so in the frequency domain, it is $\frac{1}{s}$).

$\sigma(t)$	$\circ \text{---} \bullet$	$\frac{1}{s}$	$\sigma(t) \cdot t^2 \cdot e^{\alpha t}$	$\circ \text{---} \bullet$	$\frac{2}{(s-\alpha)^3}$
$\sigma(t) \cdot t$	$\circ \text{---} \bullet$	$\frac{1}{s^2}$	$\sigma(t) \cdot t^n \cdot e^{\alpha t}$	$\circ \text{---} \bullet$	$\frac{n!}{(s-\alpha)^{n+1}}$
$\sigma(t) \cdot t^2$	$\circ \text{---} \bullet$	$\frac{2}{s^3}$	$\sigma(t) \cdot \sin(\omega t)$	$\circ \text{---} \bullet$	$\frac{\omega}{s^2 + \omega^2}$
$\sigma(t) \cdot t^n$	$\circ \text{---} \bullet$	$\frac{n!}{s^{n+1}}$	$\sigma(t) \cdot \cos(\omega t)$	$\circ \text{---} \bullet$	$\frac{s}{s^2 + \omega^2}$
$\sigma(t) \cdot e^{\alpha t}$	$\circ \text{---} \bullet$	$\frac{1}{s-\alpha}$	$\delta(t)$	$\circ \text{---} \bullet$	$1(s)$
$\sigma(t) \cdot t \cdot e^{\alpha t}$	$\circ \text{---} \bullet$	$\frac{1}{(s-\alpha)^2}$	$\delta(t-a)$	$\circ \text{---} \bullet$	e^{-as}

7 Math Fundamentals

7.1 Partial Fraction Decomposition

$$f(x) = \frac{x^2 + 20x + 149}{x^3 + 4x^2 - 11x - 30} \Rightarrow \begin{array}{l} \text{Factorize denominator using} \\ \text{Horner's scheme, binomial, etc.} \end{array} \Rightarrow x^3 + 4x^2 - 11x - 30 = (x+2)(x^2 + 2x - 15) = (x+2)(x+5)(x-3)$$

Approach:

$$f(x) = \frac{x^2 + 20x + 149}{x^3 + 4x^2 - 11x - 30} = \frac{A}{x-3} + \frac{B}{x+2} + \frac{C}{x+5} = \frac{A(x+2)(x+5) + B(x-3)(x+5) + C(x-3)(x+2)}{(x-3)(x+2)(x+5)}$$

Set up a system of equations with arbitrary values of x_i (preferably choose poles or 0,1,-1):

$$\begin{aligned} x_1 = 3 : -9 + 60 + 149 &= A \cdot 5 \cdot 8 \Rightarrow A = 5 \\ x_2 = -2 : -4 - 40 + 149 &= B(-5) \cdot 3 \Rightarrow B = -7 \\ x_3 = -5 : -25 - 100 + 149 &= C(-8)(-3) \Rightarrow C = 1 \end{aligned} \Rightarrow f(x) = \frac{5}{x-3} - \frac{7}{x+2} + \frac{1}{x+5}$$

Additional approaches for other types of terms:

$$f(x) = \frac{5x^2 - 37x + 54}{x^3 - 6x^2 + 9x} = \frac{A}{x} + \frac{B}{x-3} + \frac{C}{(x-3)^2} = \frac{A(x-3)^2 + Bx(x-3) + Cx}{x(x-3)^2}$$

$$f(x) = \frac{1.5x}{x^3 - 6x^2 + 12x - 8} = \frac{A}{x-2} + \frac{B}{(x-2)^2} + \frac{C}{(x-2)^3} = \frac{A(x-2)^2 + B(x-2) + C}{(x-2)^3}$$

$$f(x) = \frac{x^2 - 1}{x^3 + 2x^2 - 2x - 12} = \frac{A}{x-2} + \frac{Bx+C}{x^2+4x+6} = \frac{A(x^2+4x+6) + (Bx+C)(x-2)}{(x-2)(x^2+4x+6)}$$

7.1.1 Horner's Scheme

- Arrows \Rightarrow Multiplication

- Numbers in each column are added

$$\begin{array}{c|cccccc} & a_n & a_{n-1} & a_{n-2} & \cdots & a_1 & a_0 \\ x_1 & & b_{n-1}x_1 & b_{n-2}x_1 & \cdots & b_1x_1 & b_0x_1 \\ \hline & b_{n-1} & b_{n-2} & b_{n-3} & \cdots & b_0 & f(x_1) \end{array}$$

$x_1 \Rightarrow$ Root (must be guessed!!)

Top row = polynomial to be factored

Example:

$$f(x) = x^3 - 67x - 126$$

$$\begin{array}{c|cccc} x_1 = -2 & 1 & 0 & -67 & -126 \\ & & -2 & 4 & +126 \\ \hline & 1 & -2 & -63 & 0 = f(-2) \\ & \uparrow & \uparrow & \uparrow & \\ & b_2 & b_1 & b_0 & \end{array}$$

$$\Rightarrow f(x) = (x - x_1)(b_2x^2 + b_1x + b_0) = (x+2)(x^2 - 2x - 63)$$

7.2 Trigonometry

$\sin^2(b) + \cos^2(b) = 1 \qquad \tan(b) = \frac{\sin(b)}{\cos(b)} \qquad \cosh(b)^2 - \sinh(b)^2 = 1 \qquad \tanh(b) = \frac{\sinh(b)}{\cosh(b)}$

7.2.1 Function Values for Angle Arguments

deg	rad	sin	cos	tan	deg	rad	sin	cos	deg	rad	sin	cos	deg	rad	sin	cos
0	0	0	1	0	90	$\frac{\pi}{2}$	1	0	180	π	0	-1	270	$\frac{3\pi}{2}$	-1	0
30	$\frac{\pi}{6}$	$\frac{1}{2}$	$\frac{\sqrt{3}}{2}$	$\frac{\sqrt{3}}{3}$	120	$\frac{2\pi}{3}$	$\frac{\sqrt{3}}{2}$	$-\frac{1}{2}$	210	$\frac{7\pi}{6}$	$-\frac{1}{2}$	$-\frac{\sqrt{3}}{2}$	300	$\frac{5\pi}{3}$	$-\frac{\sqrt{3}}{2}$	$\frac{1}{2}$
45	$\frac{\pi}{4}$	$\frac{\sqrt{2}}{2}$	$\frac{\sqrt{2}}{2}$	1	135	$\frac{3\pi}{4}$	$\frac{\sqrt{2}}{2}$	$-\frac{\sqrt{2}}{2}$	225	$\frac{5\pi}{4}$	$-\frac{\sqrt{2}}{2}$	$-\frac{\sqrt{2}}{2}$	315	$\frac{7\pi}{4}$	$-\frac{\sqrt{2}}{2}$	$\frac{\sqrt{2}}{2}$
60	$\frac{\pi}{3}$	$\frac{\sqrt{3}}{2}$	$\frac{1}{2}$	$\sqrt{3}$	150	$\frac{5\pi}{6}$	$\frac{1}{2}$	$-\frac{\sqrt{3}}{2}$	240	$\frac{4\pi}{3}$	$-\frac{\sqrt{3}}{2}$	$-\frac{1}{2}$	330	$\frac{11\pi}{6}$	$-\frac{1}{2}$	$\frac{\sqrt{3}}{2}$

7.2.2 Quadrant Relations

$\sin(-a) = -\sin(a) \qquad \cos(-a) = \cos(a)$
 $\sin(\pi - a) = \sin(a) \qquad \cos(\pi - a) = -\cos(a)$
 $\sin(\pi + a) = -\sin(a) \qquad \cos(\pi + a) = -\cos(a)$
 $\sin\left(\frac{\pi}{2} - a\right) = \sin\left(\frac{\pi}{2} + a\right) = \cos(a) \qquad \cos\left(\frac{\pi}{2} - a\right) = -\cos\left(\frac{\pi}{2} + a\right) = \sin(a)$

Addition Theorems $\sin(a \pm b) = \sin(a) \cdot \cos(b) \pm \cos(a) \cdot \sin(b) \qquad \cos(a \pm b) = \cos(a) \cdot \cos(b) \mp \sin(a) \cdot \sin(b)$
 $\tan(a \pm b) = \frac{\tan(a) \pm \tan(b)}{1 \mp \tan(a) \cdot \tan(b)}$

7.2.3 Double and Half Angles

$\sin(2a) = 2 \sin(a) \cos(a) \qquad \cos(2a) = \cos^2(a) - \sin^2(a) = 2 \cos^2(a) - 1 = 1 - 2 \sin^2(a)$
 $\cos^2\left(\frac{a}{2}\right) = \frac{1+\cos(a)}{2} \qquad \sin^2\left(\frac{a}{2}\right) = \frac{1-\cos(a)}{2}$

7.2.4 Products

$\sin(a) \sin(b) = \frac{1}{2}(\cos(a - b) - \cos(a + b))$
 $\cos(a) \cos(b) = \frac{1}{2}(\cos(a - b) + \cos(a + b))$
 $\sin(a) \cos(b) = \frac{1}{2}(\sin(a - b) + \sin(a + b))$

7.2.5 Hyperbolic

$\sinh(z) = \frac{1}{2}(e^z - e^{-z}) \qquad \cosh(z) = \frac{1}{2}(e^z + e^{-z})$

7.2.7 Euler

$\sin(z) = \frac{e^{jz} - e^{-jz}}{2j} \qquad \cos(z) = \frac{e^{jz} + e^{-jz}}{2} \qquad e^{j\varphi} = \cos(\varphi) + j\sin(\varphi)$

7.2.8 Complex

Magnitude: $|z| = \sqrt{\operatorname{Re}(z)^2 + \operatorname{Im}(z)^2} = \sqrt{z \cdot \bar{z}}$
Complex conjugate: $z = z_1 + jz_2 \qquad \bar{z} = z^* = z_1 - jz_2$

7.3 Taylor Polynomial

$f(x_0 + h) = f(x_0) + f'(x_0)h + \frac{f''(x_0)}{2}h^2 + \frac{f'''(x_0)}{3!}h^3 + \dots + \frac{f^{(n)}(x_0)}{n!}h^n + R_n(x_0, h)$

7.4 Integral Calculus

Integration $A = \int_a^b f(t)dt = [F(t)]_a^b = F(b) - F(a)$

Linearity $\int f(\alpha x + \beta)dx = \frac{1}{\alpha} \cdot F(\alpha x + \beta) + C$

Partial Integration $\int_a^b \overset{\uparrow}{u'(x)} \cdot \overset{\downarrow}{v(x)}dx = \left[u(x) \cdot v(x) \right]_a^b - \int_a^b u(x) \cdot v'(x)dx$

Substitution (Rationalization)	$t = \tan \frac{x}{2}, \quad dx = \frac{2dt}{1+t^2} \quad \sin x = \frac{2t}{1+t^2} \quad \cos x = \frac{1-t^2}{1+t^2} \quad \int R(\sin(x) \cos(x)) dx$
General Substitution	$\int_a^b f(x) dx = \int_{g^{-1}(a)}^{g^{-1}(b)} f(g(t)) \cdot g'(t) dt \quad t = g^{-1}(x) \quad \boxed{x=g(t)} \quad dx = g'(t) \cdot dt$
Logarithmic Integration	$\int \frac{f'(x)}{f(x)} dx = \ln f(x) + C \quad (f(x) \neq 1)$
Special Form of the Integrand	$\int f'(x) \cdot (f(x))^\alpha dx = f(x)^{\alpha+1} \cdot \frac{1}{\alpha+1} + C \quad (\alpha \neq -1)$
Differentiation	$\int_a^b f'(t) dt = f(b) - f(a) \quad \frac{d}{dx} \int_1^x f(t) dt = f(x)$

$$\int dx = x + C$$

$$\int x^\alpha dx = \frac{x^{\alpha+1}}{\alpha+1} + C, x \in \mathbb{R}^+, \alpha \in \mathbb{R} \setminus \{-1\}$$

$$\int \frac{1}{x} dx = \ln|x| + C, x \neq 0$$

$$\int e^x dx = e^x + C$$

$$\int a^x dx = \frac{a^x}{\ln(a)} + C, a \in \mathbb{R}^+ \setminus \{1\}$$

$$\int \sin x dx = -\cos x + C$$

$$\int \cos x dx = \sin x + C$$

$$\int \frac{dx}{\sin^2 x} = -\cot(x) + C, x \neq k\pi \text{ with } k \in \mathbb{Z}$$

$$\int \frac{dx}{\cos^2 x} = \tan(x) + C, x \neq \frac{\pi}{2} + k\pi \text{ with } k \in \mathbb{Z}$$

$$\int \sinh(x) dx = \cosh(x) + C$$

$$\int \cosh(x) dx = \sinh(x) + C$$

$$\int \frac{dx}{\sinh^2 x} = -\coth(x) + C, x \neq 0$$

$$\int \frac{dx}{\cosh^2 x} = \tanh(x) + C, x \neq 0$$

$$\int \frac{dx}{ax+b} = \frac{1}{a} \ln|ax+b| + C, a \neq 0, x \neq -\frac{b}{a}$$

$$\int \frac{dx}{a^2x^2+b^2} = \frac{1}{ab} \arctan\left(\frac{a}{b}x\right) + C, a \neq 0, x \neq -\frac{b}{a}, x \neq \frac{b}{a}$$

$$\int \frac{dx}{a^2x^2-b^2} = \frac{1}{2ab} \ln\left|\frac{ax-b}{ax+b}\right| + C, a \neq 0, x \neq -\frac{b}{a}, x \neq \frac{b}{a}$$

$$\int \sqrt{a^2x^2+b^2} dx = \frac{x}{2} \sqrt{a^2x^2+b^2} + \frac{b^2}{2a} \ln(ax + \sqrt{a^2x^2+b^2}) + C, a \neq 0, b \neq 0$$

$$\int \sqrt{a^2x^2-b^2} dx = \frac{x}{2} \sqrt{a^2x^2-b^2} + \frac{b^2}{2a} \ln|ax + \sqrt{a^2x^2-b^2}| + C, a \neq 0, b \neq 0, a^2x^2 \geq b^2$$

$$\int \sqrt{b^2-a^2x^2} dx = \frac{x}{2} \sqrt{b^2-a^2x^2} + \frac{b^2}{2a} \arcsin\left(\frac{a}{b}x\right) + C, a \neq 0, b \neq 0, a^2x^2 \leq b^2$$

$$\int \frac{dx}{\sqrt{a^2x^2+b^2}} = \frac{1}{a} \ln(ax + \sqrt{a^2x^2+b^2}) + C, a \neq 0, b \neq 0$$

$$\int \frac{dx}{\sqrt{a^2x^2-b^2}} = \frac{1}{a} \ln(ax + \sqrt{a^2x^2-b^2}) + C, a \neq 0, b \neq 0, a^2x^2 > b^2$$

$$\int \frac{dx}{\sqrt{b^2-a^2x^2}} = \frac{1}{a} \arcsin\left(\frac{a}{b}x\right) + C, a \neq 0, b \neq 0, a^2x^2 < b^2$$

The integrals $\int \frac{dx}{X}$, $\int \sqrt{X} dx$, $\int \frac{dx}{\sqrt{X}}$ with $X = ax^2 + 2bx + c$, $a \neq 0$, are transformed by the transformation $X = a\left(x + \frac{b}{a}\right)^2 + \left(c - \frac{b^2}{a}\right)$ and the substitution $t = x + \frac{b}{a}$ into the integrals 15. to 22.

$$\int \frac{x dx}{X} = \frac{1}{2a} \ln|X| - \frac{b}{a} \int \frac{dx}{X}, a \neq 0, X = ax^2 + 2bx + c$$

$$\int \sin^2(ax) dx = \frac{x}{2} - \frac{1}{4a} \cdot \sin(2ax) + C, a \neq 0$$

$$\int \cos^2(ax) dx = \frac{x}{2} + \frac{1}{4a} \cdot \sin(2ax) + C, a \neq 0$$

$$\int \sin^n(ax) dx = \frac{\sin^{n-1}(ax) \cdot \cos(ax)}{na} + \frac{n-1}{n} \int \sin^{n-2}(ax) dx, n \in \mathbb{N}, a \neq 0$$

$$\int \cos^n(ax) dx = \frac{\cos^{n-1}(ax) \cdot \sin(ax)}{na} + \frac{n-1}{n} \int \cos^{n-2}(ax) dx, n \in \mathbb{N}, a \neq 0$$

$$\int \frac{dx}{\sin(ax)} = \frac{1}{a} \ln|\tan(\frac{ax}{2})| + C, a \neq 0, x \neq k\frac{\pi}{a} \text{ with } k \in \mathbb{Z}$$

$$\int \frac{dx}{\cos(ax)} = \frac{1}{a} \ln|\tan(\frac{ax}{2} + \frac{\pi}{4})| + C, a \neq 0, x \neq \frac{\pi}{2a} + k\frac{\pi}{a} \text{ with } k \in \mathbb{Z}$$

$$\int \tan(ax) dx = -\frac{1}{a} \ln|\cos(ax)| + C, a \neq 0, x \neq \frac{\pi}{2a} + k\frac{\pi}{a} \text{ with } k \in \mathbb{Z}$$

$$\int \cot(ax) dx = \frac{1}{a} \ln|\sin(ax)| + C, a \neq 0, x \neq k\frac{\pi}{a} \text{ with } k \in \mathbb{Z}$$

$$\int x^n \sin(ax) dx = -\frac{x^n}{a} \cos(ax) + \frac{n}{a} \int x^{n-1} \cos(ax) dx, n \in \mathbb{N}, a \neq 0$$

$$\int x^n \cos(ax) dx = \frac{x^n}{a} \sin(ax) - \frac{n}{a} \int x^{n-1} \sin(ax) dx, n \in \mathbb{N}, a \neq 0$$

$$\int x^n e^{ax} dx = \frac{1}{a} x^n e^{ax} - \frac{n}{a} \int x^{n-1} e^{ax} dx, n \in \mathbb{N}, a \neq 0$$

$$\int e^{ax} \sin(bx) dx = \frac{e^{ax}}{a^2+b^2} (a \cdot \sin(bx) - b \cdot \cos(bx)) + C, a \neq 0, b \neq 0$$

$$\int e^{ax} \cos(bx) dx = \frac{e^{ax}}{a^2+b^2} (a \cdot \cos(bx) + b \cdot \sin(bx)) + C, a \neq 0, b \neq 0$$

$$\int \ln(x) dx = x(\ln(x) - 1) + C, x \in \mathbb{R}^+$$

$$\int x^\alpha \cdot \ln(x) dx = \frac{x^{\alpha+1}}{(\alpha+1)^2} [(\alpha+1) \ln(x) - 1] + C, x \in \mathbb{R}^+, \alpha \in \mathbb{R} \setminus \{-1\}$$

7.5 Differential Equations

7.5.1 Linear Differential Equation of 1. Order

Form: $y' + f(x)y = g(x)$ **Procedure:** $y = y_H + y_P$ $y_H = k \cdot e^{-\int f(x)dx}$ where $k = y_0$
 $y_P = k \cdot e^{-\int f(x)dx}$ where $k = \int (g(x) \cdot e^{\int f(x)dx})dx$

7.5.2 Linear Differential Equation 2nd Order with Constant Coefficients

Form: $y'' + a_1 \cdot y' + a_0 \cdot y = f(x)$ **Forcing Term:** $f(x)$
Homogeneous Differential Equation: $f(x) = 0$ **Inhomogeneous Differential Equation:** $f(x) \neq 0$

7.5.3 General Solution of a Homogeneous ODE: Y_H

Characteristic Polynomial $\lambda^2 + a_1 \cdot \lambda + a_0 = 0$ of $y'' + a_1 \cdot y' + a_0 \cdot y = 0$ $(\lambda_{1,2} = -\frac{a_1}{2} \pm \frac{\sqrt{a_1^2 - 4a_0}}{2})$

If $\lambda_1 \neq \lambda_2$ and $\lambda_{1,2} \in \mathbb{R}$: $Y_H = Ae^{\lambda_1 x} + Be^{\lambda_2 x}$
If $\lambda_1 = \lambda_2$ and $\lambda_{1,2} \in \mathbb{R}$: $Y_H = e^{\lambda_1 x}(A + B \cdot x)$
If $\lambda_{1,2} = -\frac{a_1}{2} \pm j\alpha$: $Y_H = e^{-\frac{1}{2}a_1 x}(A \cos(\alpha x) + B \sin(\alpha x))$

7.5.4 General Solution of an Inhomogeneous ODE: $y = Y_H + y_P$

Basic Solution Method of an Inhomogeneous ODE: y_P

Homogeneous ODE: $y'' + a_1 \cdot y' + a_0 \cdot y = 0$ for which $(g(x) = Y_H \text{ homogeneous solution})$ $g(x_0) = 0$ and $g'(x_0) = 1$ holds, is:

$$y_P(x) = \int_{x_0}^x g(x + x_0 - t) \cdot f(t) dt$$

the particular solution of $y'' + a_1 \cdot y' + a_0 \cdot y = f(x)$

The Approach of an Inhomogeneous ODE in the Form of The Forcing Term: y_P

$f(x) = p_n(x)$ $(p_n(x) \text{ and } q_n(x) \text{ are polynomials of the same degree})$

Case a: $a_0 \neq 0$: $y_P = q_n(x)$
Case b: $a_0 = 0, a_1 \neq 0$: $y_P = x \cdot q_n(x)$
Case c: $a_0 = a_1 = 0$: $y_P = x^2 \cdot q_n(x)$

$f(x) = e^{bx} \cdot p_n(x)$

Case a: b not a root of the characteristic polynomial: $y_P = e^{bx} \cdot q_n(x)$
Case b: b a simple root of the characteristic polynomial: $y_P = e^{bx} \cdot x \cdot q_n(x)$
Case c: b a double root of the characteristic polynomial: $y_P = e^{bx} \cdot x^2 \cdot q_n(x)$

$f(x) = e^{cx} \cdot (p_n(x) \cos(bx) + q_n(x) \sin(bx))$

Case a: $c + jb$ not a solution of the characteristic equation: $y_P = e^{cx} \cdot (r_n(x) \cos(bx) + s_n(x) \sin(bx))$
Case b: $c + jb$ a solution of the characteristic equation: $y_P = e^{cx} \cdot x \cdot (r_n(x) \cos(bx) + s_n(x) \sin(bx))$

Superposition Principle

$f(x) = c_1 f_1(x) + c_2 f_2(x)$

y_1 is a specific solution of the ODE
 y_2 is a specific solution of the ODE
then:

$$\begin{aligned} y'' + a_1 \cdot y' + a_0 \cdot y &= c_1 f_1(x) \\ y'' + a_1 \cdot y' + a_0 \cdot y &= c_2 f_2(x) \\ y_P &= c_1 y_1 + c_2 y_2 \end{aligned}$$

7.5.5 Linear Differential Equation of nth Order with Constant Coefficients

Form: $y^{(n)} + a_{n-1} \cdot y^{(n-1)} + \dots + a_0 \cdot y = f(x) \Leftrightarrow \sum_{k=0}^n a_k y^{(k)} = f(x)$

Homogeneous Solutions

Case a: r real solutions λ :

$$y_1 = e^{\lambda x}, y_2 = x e^{\lambda x}, \dots, y_r = x^{r-1} e^{\lambda x}$$

Strong damping/creeper case

Case b: k complex solutions $\lambda = \alpha + j\beta$:

$$y_1 = e^{\alpha x} \cos(\beta x), y_3 = e^{\alpha x} x^1 \cos(\beta x), \dots \text{ (odd)}$$

Weak damping /

$$y_2 = e^{\alpha x} \sin(\beta x), y_4 = e^{\alpha x} x^1 \sin(\beta x), \dots \text{ (even)}$$

Oscillation case

Degrees of freedom (A, B, C, \dots) and additional x^n should not be forgotten!!!

Most General Solution of the Particular Part:

$$\underbrace{\sum_{k=0}^n a_k y^{(k)}}_{f(y, y', y'', \dots)} = \underbrace{e^{\alpha x} (p_{m1}(x) \cos(\beta x) + q_{m2}(x) \sin(\beta x))}_{\text{Forcing term}}$$

Distinguish solutions of the characteristic polynomial (λ) :

with $m = \max(m1, m2)$

Case a: $\alpha + j\beta \neq \lambda$, then

$$y_P = e^{\alpha x} (r_m(x) \cos(\beta x) + s_m(x) \sin(\beta x))$$

Case b: $\alpha + j\beta$ is a u -fold solution of λ , then

$$y_P = e^{\alpha x} x^u (r_m(x) \cos(\beta x) + s_m(x) \sin(\beta x))$$

u -fold resonance

Basic Solution Method

$$\left(\begin{array}{ccc} g(x_0) = 0 & = & c_1 g_1(x_0) + c_2 g_2(x_0) + \dots + c_n(x_0) \\ g'(x_0) = 0 & = & c_1 g'_1(x_0) + c_2 g'_2(x_0) + \dots + c_n g'_n(x_0) \\ \vdots & & \\ g^{(n-1)}(x_0) = 1 & = & c_1 g_1^{(n-1)}(x_0) + c_2 g_2^{(n-1)}(x_0) + \dots + c_n g_n^{(n-1)}(x_0) \end{array} \right) \quad \begin{array}{l} \text{Results in } c_1, \dots, c_n \text{ for} \\ y_P(x) = \int_{x_0}^x g(x + x_0 - t) f(t) dt \end{array}$$

7.5.6 Linear Differential Equation Systems of First Order with Constant Coefficients

Form: $\dot{x} = ax + by + f(t) \Leftrightarrow y = \frac{1}{b}(\dot{x} - ax - f(t))$
 $\dot{y} = cx + dy + g(t)$

The general solution results from the ODE: $\ddot{x} - (a + d)\dot{x} + (ad - bc)x = \dot{f}(t) - d \cdot f(t) + b \cdot g(t)$

$\ddot{x}, \dot{x}, \dot{y}$ are each differentiated with respect to t !

7.5.7 Solving ODEs with Laplace Transformation

To solve an ODE with Laplace (causal!), the equation must first be transformed into the Laplace domain. After that, the equation can be solved algebraically. The result must then be transformed back into the original domain through inverse transformation.

Note:

- $H(s) = \frac{1}{p(s)}$ where $p(s)$ represents the characteristic polynomial

Stability

A system is stable if the root of the characteristic polynomial $p(s)$ lies in the left half-plane:

$$\text{Re}[p(s)] < 0$$

7.5.8 Common DEs

DE	Solution	DE	Solution
$\frac{dx}{dt} = 0$	C	$\frac{dx}{dt} = 1$	$t + C$
$\frac{dx}{dt} = y$	$t \cdot y + C$	$\frac{dx}{dt} = kx$	Ce^{kt}
$\frac{du}{dt} = \sin(t)$	$C - \cos(t)$	$\frac{d^2x}{dt^2} = k^2x$	$A * \cosh(kt) + B * \sinh(kt) = \frac{1}{2}((A + B)e^{kt} + (A - B)e^{-kt})$
$\frac{d^2x(t)}{dt^2} = -\omega^2 x(t)$	$A \cos(\omega t) + B \sin(\omega t)$		

7.6 Differential Calculus

$$f'(x_0) = \lim_{\Delta x \rightarrow 0} \frac{f(x_0 + \Delta x) - f(x_0)}{\Delta x}$$

$$\text{Chain rule: } f(g(x))' = g'(x) \cdot f'(g(x)) \text{ or } \frac{df(g(x))}{dx} = f'(g(x)) \cdot g'(x)$$

$$\text{Product rule: } (f(x) \cdot g(x))' = f'(x) \cdot g(x) + f(x) \cdot g'(x)$$

$$\text{Quotient rule: } \frac{f(x)}{g(x)} = \frac{f'(x)g(x) - f(x)g'(x)}{g^2(x)}$$

7.7 Miscellaneous

7.7.1 Quadratic Formula

$$ax^2 + bx + c = 0 \Rightarrow x_{1,2} = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

7.7.3 Matrix Inversion

$$A = \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix} \Rightarrow A^{-1} = \frac{1}{\det(A)} \begin{bmatrix} a_{22} & -a_{12} \\ -a_{21} & a_{11} \end{bmatrix}$$

7.7.5 TI-89

Equation for multiple values

$(3x + y^2) \mid x = 1 \text{ and } y = 2 \rightarrow \text{Result}$

Matrix Editor

- APPS / Data/Matrix Editor
- New
- Type: Matrix
- Define Variable, Row, Column
- Enter values

Delete saved variables

- Explorer: 2nd / VAR-LINK
- Select variable
- Delete: DEL
- Confirm deletion: ENTER

7.7.2 Determinants

$$\det \left(\begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix} \right) = \begin{vmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{vmatrix} = a_{11}a_{22} - a_{12}a_{21}$$

7.7.4 Eigenvalues/ Eigenvectors

$$\text{Eigenvalue: } \det(A - \lambda I) \Rightarrow \lambda_i$$

$$\text{Eigenvector: } (A - \lambda_i I)v = 0 \Rightarrow v_i \quad (\text{For each } \lambda_i)$$

$$\text{Definition: } A \cdot \underline{v} = \lambda \cdot \underline{v}$$