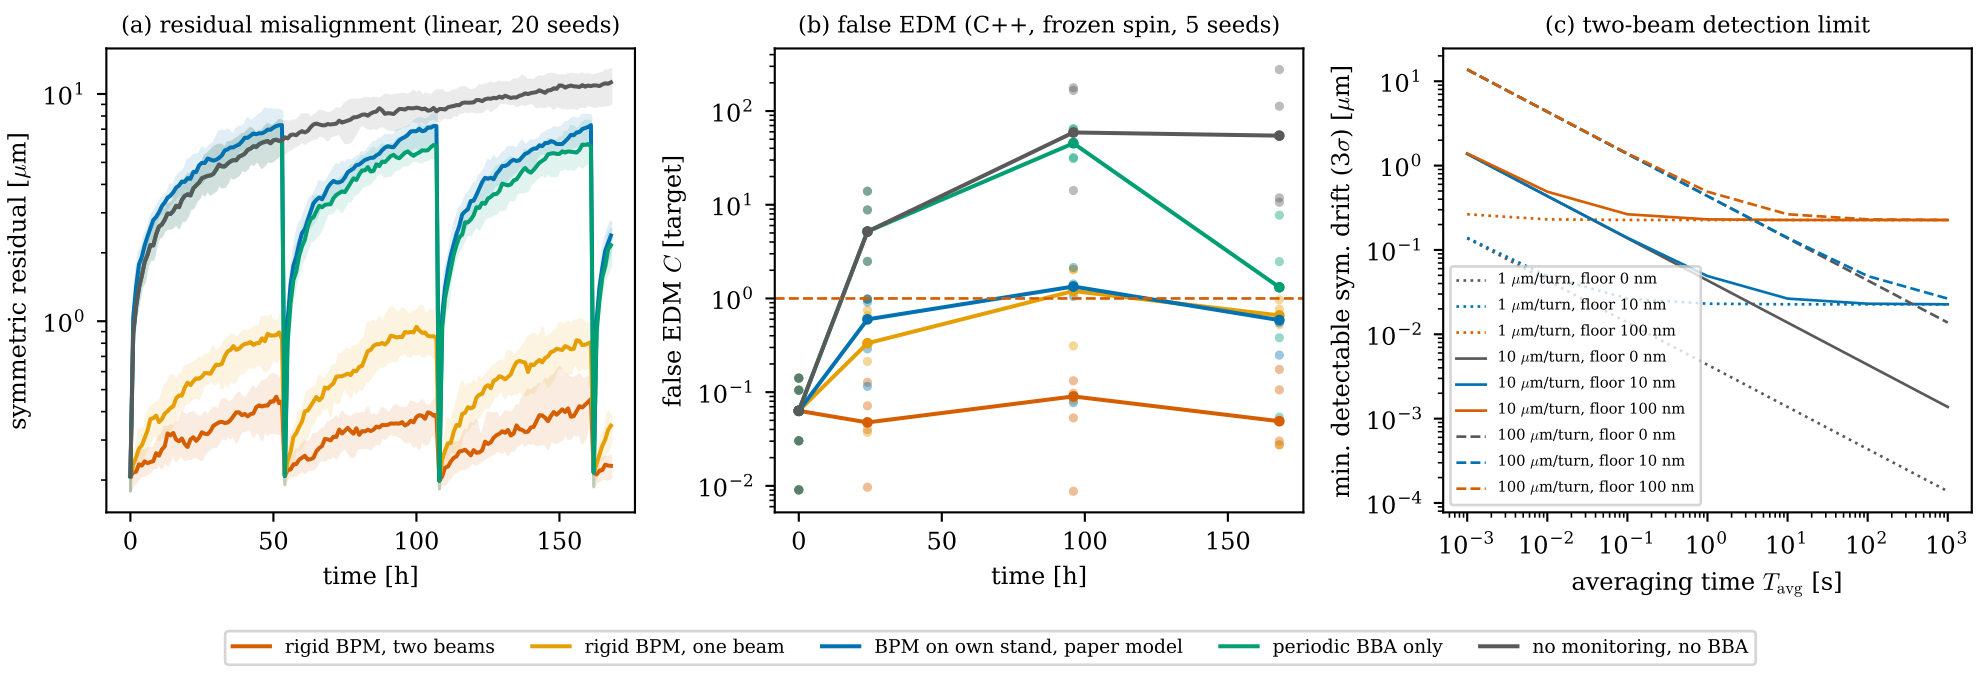

(a) residual misalignment (linear, 20 seeds)
symmetric residual [μm]
time [h]
(b) false EDM (C++, frozen spin, 5 seeds)
false EDM C [target]
time [h]
(c) two-beam detection limit
min. detectable sym. drift (3σ) [μm]
averaging time T_{avg} [s]
1 μm/turn, floor 0 nm
1 μm/turn, floor 10 nm
1 μm/turn, floor 100 nm
10 μm/turn, floor 0 nm
10 μm/turn, floor 10 nm
10 μm/turn, floor 100 nm
100 μm/turn, floor 0 nm
100 μm/turn, floor 10 nm
100 μm/turn, floor 100 nm
rigid BPM, two beams
rigid BPM, one beam
BPM on own stand, paper model
periodic BBA only
no monitoring, no BBA