

Company Profile

+607-599 2111

info@ecotrafo.com.my

132, Jalan Ekoperniagaan 4, Taman Ekoperniagaan 2,
Senai Airport City 81400, Senai Johor, Malaysia.

WWW.ECOTRAFO.COM.MY

COMING together is a beginning.
KEEPING together is progress.
WORKING together is success.

Welcome MESSAGE.

FLTU

MANAGING DIRECTOR
Ecotrafo Energy

As the Managing Director of Ecotrafo Energy Sdn. Bhd.,

It gives me great pleasure to introduce you to our world-class products and services. Since our inception, we have been committed to delivering exceptional quality transformers to our clients. We take pride in our innovative and cutting-edge technology that enables us to design, manufacture and deliver customized solutions that meet the unique needs of our clients. Our team of highly skilled professionals works tirelessly to ensure that every product we manufacture is of the reliable quality, while maintaining a competitive price.

At Ecotrafo Energy Sdn. Bhd.,

we understand that time is of the essence, and we strive to ensure that every order is processed and delivered on time. Our customer service team is always available to provide prompt and efficient support to our clients, making sure that their needs are met at all times. We are also committed to sustain and reducing the carbon footprint. Our transformers are designed to be energy-efficient and environmentally friendly, ensuring that we are doing our part to protect the planet for future generations. We take pride in our reputation as a reliable and trusted partner to our clients, and we are committed to building long-term relationships with each and every one of you. We look forward to work with you to provide innovative solutions that will help you achieve your business goals.

CONTENTS.

PAGE 04	About Us
PAGE 05	Certificates
PAGE 06	How We Work
PAGE 07	Sustainability
PAGE 08	Testing Equipment
PAGE 10	Oil Type Transformer
PAGE 12	Cast Resin Dry Type Transformer
PAGE 14	Open Ventilated Dry Type Transformer

About US.

We are a transformer company committed to provide high-quality transformer

that meet the needs of our customers. Our products are designed to optimise energy usage, reduce costs and minimise environmental impact. We offer a wide range of transformers, including oil immerse & dry type distribution transformers, power transformers and other specialty transformers.



Oil immerse & Dry Type Distribution Transformers



Power Transformers



Other Specialty Transformers

With advanced research & development of transformer manufacturing technology allowing us to stay ahead of the curve in terms of load losses, noise level, cooling design and compactness. To date, we have delivered more than 300,000 transformers to our customers which has demonstrate the proven record in efficiency and reliability of our transformers. Our team of skilled engineers, technicians, and customer support specialists work closely with our clients to understand their specific needs and provide customised solutions. We also provide value-added services including installation, commissioning, maintenance and repair. We have become one of the leading transformer maker in the industry by delivering innovative and sustainable solutions to all our customers.

VISION

To be the forerunner and distinctive company in the transformer industry being part of strategic business and technological alliances.

MISSION

CUSTOMER-CENTRIC APPROACH

We are committed to understanding and addressing the unique needs of our customers, providing them with personalized, reliable, and cost-effective transformer solutions to power their growth and success.

SUSTAINABILITY AND ENVIRONMENT

We aim to be at the forefront of eco-friendly and sustainable practices that minimize environmental impact and contribute to a greener future. Also actively participate in renewable energy programs and to expand its business in renewable energy.

EMPOWERING EMPLOYEES

Our mission is to foster a culture of collaboration, diversity, and inclusion, empowering our employees to thrive, grow, and contribute their best to the company and the community.

GLOBAL REACH AND PARTNERSHIPS

We strive to expand our global footprint, forming strategic partnerships and alliances to reach new markets, and be the preferred choice for customers worldwide.


SAFETY AND QUALITY ASSURANCE

We prioritize safety and ensure the highest quality standards ensuring that our transformers are safe, reliable, and meet or exceed industry regulations.

SOCIAL RESPONSIBILITY

We are dedicated to giving back to society, supporting local communities, and engaging in charitable initiatives that make a positive impact on the lives of people around us.

Our CERTIFICATES.

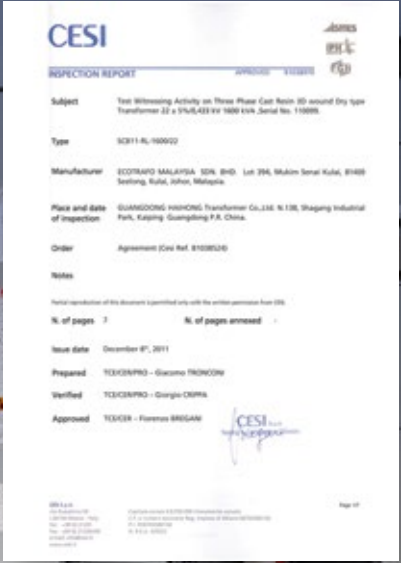

How WE WORK.

Coming together is a beginning.
Keeping together is progress.
Working together is success.

— HENRY FORD

At Ecotrafo Energy Sdn. Bhd.,
we believe that teamwork is the key
to our success.

We are a team of highly skilled and dedicated professionals who work together to provide the best possible products and services to our customers. Our team includes engineers, designers, technicians, and customer service technicians all working together to ensure that our transformers meet the highest standards of quality, performance, and safety.

We begin by collaborating with our customers to understand their unique needs and requirements. Our engineers and designers work closely with our customers to develop custom-made transformer solutions that meet their exact specifications. Throughout the entire process, our customer service team is always available to provide support and assistance. We believe in building strong relationships with our customers, and we work hard to ensure their satisfaction with our products and services.

At our Company, we are proud of our team and the work we do. Our commitment to collaboration, quality, and customer service sets us apart from the competition, and we are always looking for ways to improve and grow. Contact us today to learn more about our team and how we can help meet your power needs.



Sustainability

We prioritize environmental stewardship by implementing sustainable practices throughout our operation, **minimizing waste and reducing our carbon footprint.**

Through continuous improvement, we are constantly seeking innovative solutions to **minimize our environmental impact and contribute to a more sustainable planet.**

We strive to source materials from ethical suppliers **who share our commitment to sustainable practices and responsible sourcing.**

We actively encourage and engage our employees and stakeholders in sustainability initiatives, **fostering a culture of environmental responsibility.**

Our products are designed with sustainability in mind, **using eco-friendly materials and production processes to promote a greener future.**

Social Responsibility



We prioritize the well-being and safety of our employees, providing a nurturing and inclusive work environment that promotes, diversity, equality, and personal growth.



Our commitment to social responsibility extends beyond our organisation. We support and actively participate in local community development programs and initiatives.



We engage in fair trade practices, ensuring that the individuals and communities involved in our supply chain are treated with respect, fairness and dignity.



We are dedicated to upholding high ethical standards in all our business dealings, fostering trust and transparency with our customers, partners and stakeholders.


By embracing sustainability and social responsibility, we aim to make a positive impact on the world around us, leaving a lasting legacy for future generations.

Testing EQUIPMENT.

Lighting impact system lighting impact test



Impact console

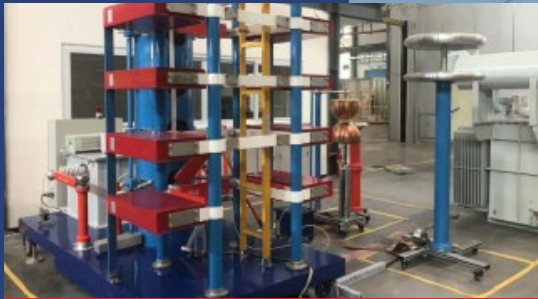

600kV impact body


Oil laboratory - oil resistance to pressure, dielectric loss, moisture, chromatography test



Multi-channel digital office amplifier + coupled capacitance - office discharge test



Local discharge analyzer

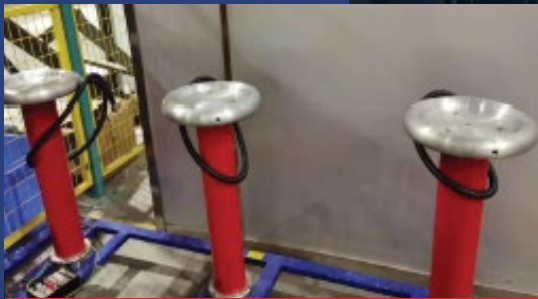


Coupling capacitance


Acoustic/electrical shielding chamber - determination of sound level local emission test



Capacitance tower - temperature rise test

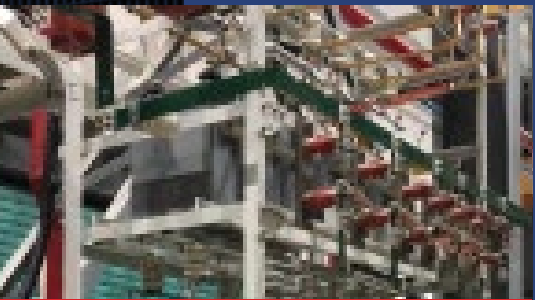

2700kVar

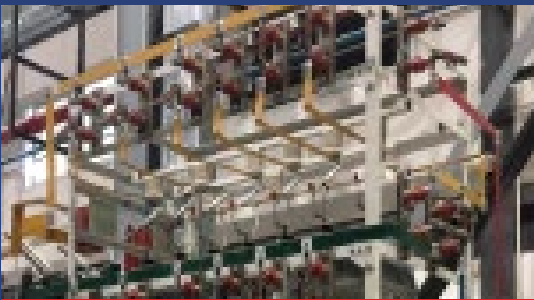

2700kVar

Oil Type TRANSFORMER.

The Ecotrafo premium oil type transformer is designed and built to meet the highest standards of quality, reliability and safety.

Our transformer is filled with high-grade insulating oil (with option to fill with FR3® fluid) that provides superior cooling properties and excellent insulation characteristic. The oil is carefully selected to meet the specific requirements of the transformer and is tested to ensure it meets or exceed all relevant industry standards.

FR3® FLUID ADVANTAGES

Safer
(Higher flashpoint than conventional mineral oil)

Lower maintenance

Improve cooling
(better heat transfer properties)

Improve performance
(higher dielectric strength)

Longer lifespan

Biodegradable
(lower environmental impact)



OIL TYPE TRANSFORMER SPECIFICATION

***Larger capacity & other special feature are available upon request

Rating (kVA)	Voltage			Vector Group	No-load Current %	No-load Loss (W)	Full-load Loss (W)	Short Circuit Impedance (%)	Weight (kg)		Dimension		
	HV (kV)	HV Tapping Range	LV (kV)						Total Weight	Oil Weight	Length (mm)	Width (mm)	Height (mm)
250	33	±2 x 2.5%	0.4	Dyn11 Yyn0	1.40	400	3760	6.5	1480	435	1220	1120	1990
500					1.20	680	6580		2695	780	2170	1370	2410
750					1.00	980	9400		3000	740	2275	1280	2410
1000					1.00	1150	11540		4600	1237	2000	1620	2645
1250					0.90	1410	13930		3830	950	2330	1470	2503
1500					0.80	1700	16670		5300	1240	2450	1500	2550
2000					0.70	2170	18390		6150	1195	2635	2050	2735
2500					0.60	2560	19660	7.0	7155	1285	2640	2300	2780
3000					0.56	3040	23080		8860	1355	2650	2520	2830
4000					0.56	3620	27360		10220	1490	3150	2580	3290
5000					0.48	4320	31380		11400	1409	3250	2610	3375
6300					0.48	5250	35050	7.5	13565	1685	3520	2820	3470
8000					0.42	7200	34480		15900	3200	3950	2390	3200

33kV model

Rating (kVA)	Voltage			Vector Group	No-load Current %	No-load Loss (W)	Full-load Loss (W)	Short Circuit Impedance (%)	Weight (kg)		Dimension		
	HV (kV)	HV Tapping Range	LV (kV)						Total Weight	Oil Weight	Length (mm)	Width (mm)	Height (mm)
250	22	±2 x 2.5%	0.4	Dyn11 Yyn0	1.2	400	3350	5.5	1240	350	1360	985	1440
500					1.0	680	5660		1900	480	1600	1130	1630
750					0.8	980	8250		2800	650	1875	1320	1760
1000					0.7	1150	11330	6.0	3150	780	1960	1400	1830
1250					0.7	1350	13200		4590	850	2020	1560	1920
1600					0.6	1630	15950		4450	965	2140	1620	2050
2000					0.6	1950	19140		5300	1125	2230	1680	2230
2500					0.5	2340	22200		6550	1380	2340	1720	2480

22kV model

Rating (kVA)	Voltage			Vector Group	No-load Current %	No-load Loss (W)	Full-load Loss (W)	Short Circuit Impedance (%)	Weight (kg)		Dimension		
	HV (kV)	HV Tapping Range	LV (kV)						Total Weight	Oil Weight	Length (mm)	Width (mm)	Height (mm)
250	6.6	±2 x 2.5%	0.4	Dyn11 Yyn0	1.2	400	3050	4.0	930	145	1150	760	1220
500					1.0	680	5150		1580	210	1390	900	1390
750					0.8	980	7500		2330	365	1540	1040	1540
1000					0.7	1150	10300	4.5	2625	420	1720	1190	1625
1250					0.6	1360	12000		3150	490	1775	1230	1720
1600					0.6	1640	14500		3720	555	1850	1260	1780
2000					0.6	1940	19800	5.5	4660	850	2200	2100	2150
2500					0.5	2290	23000		5500	990	2340	2220	2210
3150					0.5	2730	27000		7010	1260	2400	2300	2330
4000					0.5	3260	32000		8660	1550	2530	2240	2600

11kV model

Cast Resin Dry Type TRANSFORMER.

The Ecotrafo cast resin dry type transformer windings are enveloped with epoxy resin that has great mechanical strength,

higher short circuit withstand capacity and the compressed strength of epoxy resin is much robust. As the whole winding is encapsulated in solid insulation of epoxy resin, the winding is moisture proof and prevents all possible damage from harmful gas and corrosive chemical composition.



ADVANTAGES

Safer
(does not contain oil)

Lower maintenance

Superior insulation

Better protection
against short circuit

Lower noise level

Longer lifespan



- AREA OF APPLICATION

Suitable to use in locations that require high fire resistance: -

• High rise building

• Airport

• Railway station

• Subway

• Hospital

• Power plant

• Mining industries

• Shopping complexes

• Other densely populated areas

CAST RESIN DRY TYPE SPECIFICATION

***Larger capacity & other special feature are available upon request

Rating (kVA)	Voltage			Vector Group	No-load Current %	No-load Loss (W)	Full- load Loss 120°C (W)	Short Circuit Impedance (%)	LpA (dB)	Weight (kg)	Dimension		
	HV (kV)	HV Tapping Range	LV (kV)								Length (mm)	Width (mm)	Height (mm)
100	33	±2 x 2.5%	0.4	Dyn11 Yyn0	2.1	630	2090	6	46	820	1540	780	1370
160					1.6	790	2810		46	1160	1580	820	1395
200					1.6	880	3325		46	1380	1600	820	1455
250					1.4	990	3800		48	1630	1680	820	1415
315					1.4	1180	4510		48	1940	1750	1050	1535
400					1.2	1370	5415		50	2325	1760	1050	1680
500					1.2	1620	6650		50	2740	1860	1050	1800
630					1.0	1860	7695		52	3270	1930	1050	1935
800					1.0	2160	9120		52	3910	1960	1050	1985
1000					0.9	2430	10450		52	4620	2000	1200	2025
1250					0.8	2835	12730		54	5460	2060	1200	2180
1600					0.8	3240	15480		54	6570	2150	1200	2250
2000					0.8	3825	18240		56	7770	2200	1200	2300
2500					0.8	4455	21850		56	8875	2350	1200	2350

33kV model

Rating (kVA)	Voltage			Vector Group	No-load Current %	No-load Loss (W)	Full- load Loss 120°C (W)	Short Circuit Impedance (%)	LpA (dB)	Weight (kg)	Dimension		
	HV (kV)	HV Tapping Range	LV (kV)								Length (mm)	Width (mm)	Height (mm)
100	22	±2 x 2.5%	0.4	Dyn11 Yyn0	2.1	540	1990	6	46	760	1400	780	1200
160					1.6	670	2470		46	1070	1450	820	1260
200					1.6	730	2940		46	1280	1480	820	1260
250					1.4	840	3420		48	1510	1480	820	1300
315					1.4	970	4080		48	1800	1500	900	1300
400					1.2	1150	4840		50	2160	1500	900	1370
500					1.2	1350	5790		50	2540	1580	1050	1455
630					1.0	1530	6840		52	3040	1580	1050	1550
800					1.0	1750	8260		52	3630	1660	1050	1680
1000					0.9	2070	9780		52	4290	1700	1200	1740
1250					0.8	2380	11540		54	5070	1830	1200	1820
1600					0.8	2790	13870		54	6110	1910	1200	1970
2000					0.8	3240	16380		56	7220	2040	1200	2070
2500					0.8	3870	19380		56	8250	2150	1200	2160

22kV model

Rating (kVA)	Voltage			Vector Group	No-load Current %	No-load Loss (W)	Full- load Loss 120°C (W)	Short Circuit Impedance (%)	LpA (dB)	Weight (kg)	Dimension		
	HV (kV)	HV Tapping Range	LV (kV)								Length (mm)	Width (mm)	Height (mm)
100	11	±5% ±2 x 2.5%	0.4	Dyn11 Yyn0	0.9	350	1570	4	43	650	1040	720	1035
125					0.9	410	1850		45	690	1070	720	995
160					0.8	470	2130		45	810	1130	720	1025
200					0.8	540	2530		45	970	1180	720	1050
250					0.8	630	2760		46	1075	1180	720	1220
315					0.7	770	3470	6	46	1480	1280	780	1260
400					0.7	850	3990		46	1870	1200	1000	1270
500					0.7	1010	4880		46	2190	1260	1000	1295
630					0.6	1170	5880		46	2635	1300	1000	1455
800					0.6	1330	6960		48	2780	1420	1050	1415
1000					0.6	1540	8130		48	3240	1480	1050	1530
1250					0.5	1820	9690		48	3810	1540	1050	1535
1600					0.5	2140	11730		48	4505	1560	1050	1655
2000					0.4	2700	14450		48	5405	1670	1200	1755
2500					0.4	3200	17170		50	6140	1800	1200	1830

11kV model

Open Ventilated Dry Type TRANSFORMER.

The Ecotrafo open ventilated dry type transformer winding is insulated with DuPont NOMEX® paper technology.

This transformer is of non-encapsulated dry-type distribution transformer.

NOMEX® technology paper is not only aging resistant also with great toughness and elastic properties that ensure transformer remain at its best condition throughout its whole lifetime. This paper insulation having self-extinguishing properties that will not release harmful gases as well as generate smoke that harm the environment.

ADVANTAGES

Safer
(does not contain oil)

Lower maintenance

Better heat dissipation

Higher overload capability

Lightweight

Better accessibility
(maintenance/repair cost saving)

AREA OF APPLICATION
Suitable to use for all location stated as per cast resin transformer also in area of critical climate as per below: -

- Dessert area
- Iron/Steel mill
- Other foundries
- Smelting plant
- Casting plant

OPEN VENTILATED DRY TYPE SPECIFICATION

***Larger capacity & other special feature are available upon request

Rating (kVA)	Voltage			Vector Group	No-load Current %	No-load Loss (W)	Full-load Loss 120°C (W)	Short Circuit Impedance (%)	LpA (dB)	Weight (kg)	Dimension		
	HV (kV)	HV Tapping Range	LV (kV)								Length (mm)	Width (mm)	Height (mm)
100	22	±2 x 2.5%	0.4	Dyn11 Yyn0	2.1	540	2130	6	46	755	1360	780	1200
160					1.6	670	2660		46	1055	1450	820	1230
200					1.6	730	3140		46	1290	1450	820	1260
250					1.4	840	3710		48	1500	1480	820	1320
315					1.4	970	4370		48	1820	1500	900	1330
400					1.2	1150	5180		50	2180	1500	900	1390
500					1.2	1350	6170		50	2575	1550	1050	1420
630					1.0	1530	7360		52	3030	1550	1050	1515
800					1.0	1750	8830		52	3660	1640	1050	1650
1000					0.9	2070	10450		52	4300	1700	1200	1760
1250					0.8	2380	12350		54	5090	1800	1200	1815
1600					0.8	2790	14860		54	6050	1920	1200	1990
2000					0.8	3240	17570		56	7120	2070	1200	2040
2500					0.8	3870	20710		56	8000	2130	1200	2130

22kV model

Rating (kVA)	Voltage			Vector Group	No-load Current %	No-load Loss (W)	Full-load Loss 120°C (W)	Short Circuit Impedance (%)	LpA (dB)	Weight (kg)	Dimension		
	HV (kV)	HV Tapping Range	LV (kV)								Length (mm)	Width (mm)	Height (mm)
100	11	±2 x 2.5%	0.4	Dyn11 Yyn0	1.1	350	1690	4	45	745	1080	720	1120
125					1.1	410	1980		46	790	1100	720	1120
160					0.8	470	2280		46	850	1180	720	1210
200					0.8	540	2710		46	975	1210	720	1240
250					0.8	630	2960		46	1165	1250	720	1250
315					0.7	770	3730		46	1385	1310	720	1260
400					0.7	850	4280		48	1165	1370	880	1280
500					0.7	1010	5230		48	1950	1275	1050	1310
630					0.6	1170	6290	6	48	2330	1290	1050	1330
800					0.6	1330	7460		48	2265	1450	1050	1440
1000					0.6	1540	8760		50	2825	1500	1050	1440
1250					0.5	1820	10370		50	3225	1500	1050	1530
1600					0.5	2140	12580		50	3640	1560	1050	1705
2000					0.4	2700	15560		50	4390	1650	1200	1790
2500					0.4	3200	18450		50	5180	1670	1200	1910

11kV model

