Bits, Bytes, and Integers

Today: Bits, Bytes, and Integers

- **Representing information as bits**
- Bit-level manipulations
- Integers
  - Representation: unsigned and signed
  - Conversion, casting
  - Expanding, truncating
  - Addition, negation, multiplication, shifting
- Summary

Binary Representations

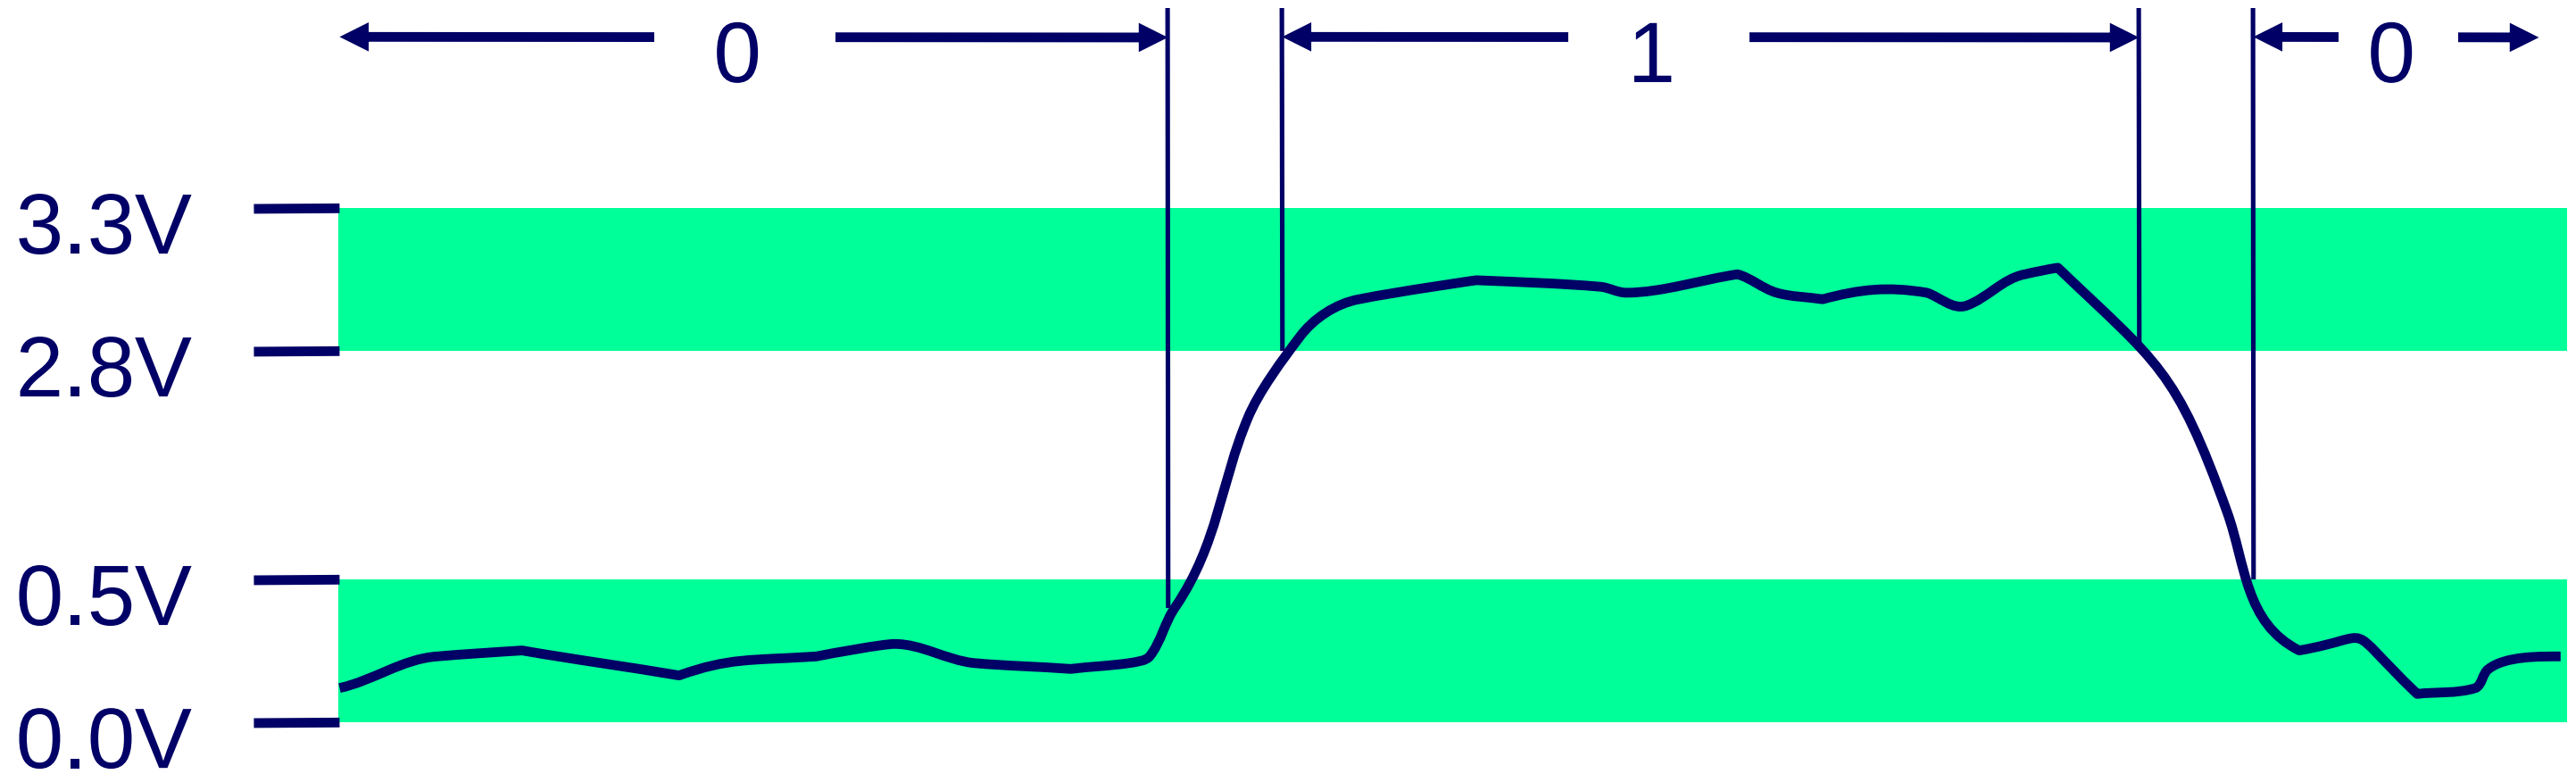

Encoding Byte Values

- **Byte = 8 bits**
  - Binary 00000000_2 to 11111111_2
  - Decimal: 0_{10} to 255_{10}
  - Hexadecimal 00_{16} to FF_{16}
    - Base 16 number representation
    - Use characters ‘0’ to ‘9’ and ‘A’ to ‘F’
    - Write $FA1D37B_{16}$ in C as
      - 0xFA1D37B
      - 0xfa1d37b

Hex	Decimal	Binary
0	0	0000
1	1	0001
2	2	0010
3	3	0011
4	4	0100
5	5	0101
6	6	0110
7	7	0111
8	8	1000
9	9	1001
A	10	1010
B	11	1011
C	12	1100
D	13	1101
E	14	1110
F	15	1111

Byte-Oriented Memory Organization

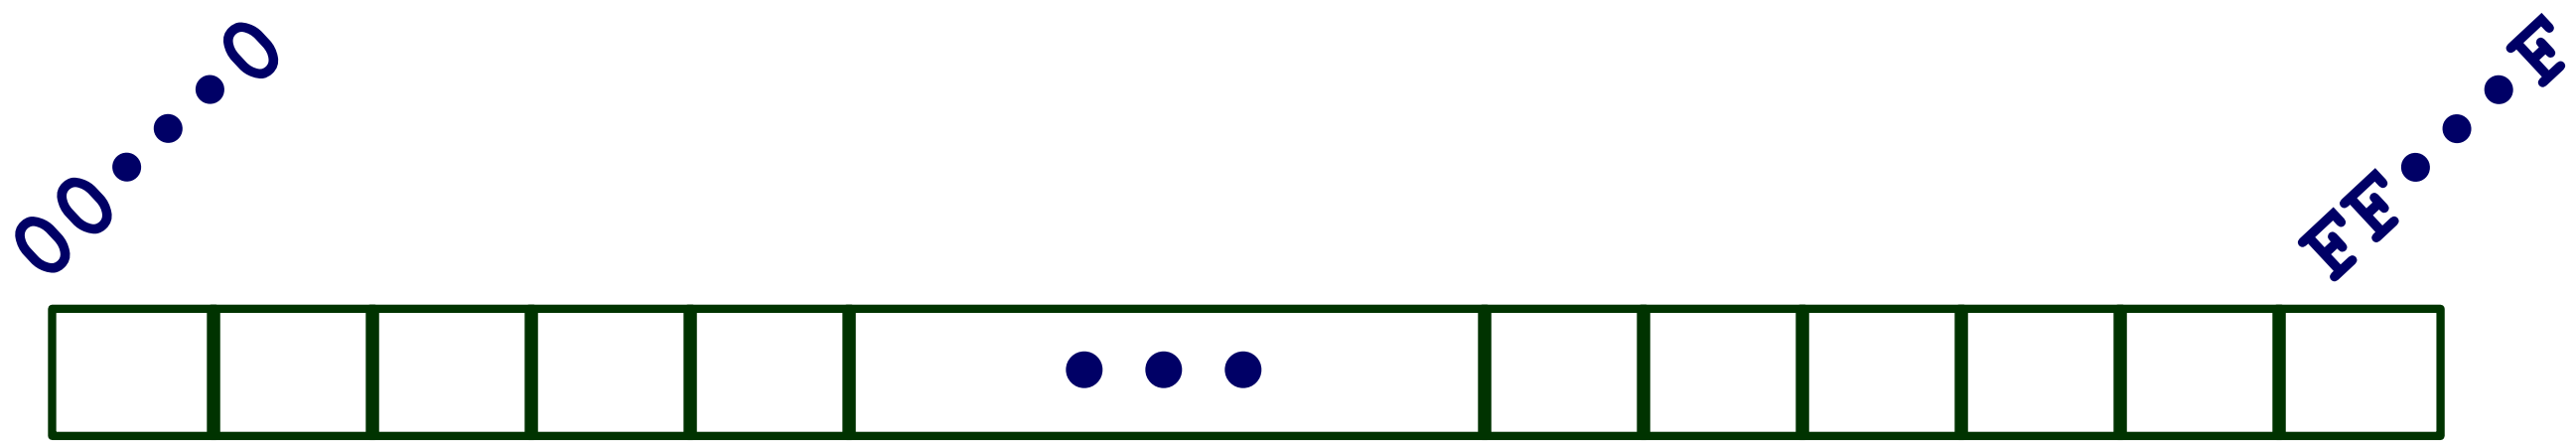

- **Programs Refer to Virtual Addresses**
  - Conceptually very large array of bytes
  - Actually implemented with hierarchy of different memory types
  - System provides address space private to particular "process"
    - Program being executed
    - Program can clobber its own data, but not that of others
- **Compiler + Run-Time System Control Allocation**
  - Where different program objects should be stored
  - All allocation within single virtual address space

Machine Words

- **Machine Has "Word Size"**
  - Nominal size of integer-valued data
    - Including addresses
  - Most current machines use 32 bits (4 bytes) words
    - Limits addresses to 4GB
    - Becoming too small for memory-intensive applications
  - High-end systems use 64 bits (8 bytes) words
    - Potential address space ≈ 1.8×10^{19} bytes
    - x86-64 machines support 48-bit addresses: 256 Terabytes
  - Machines support multiple data formats
    - Fractions or multiples of word size
    - Always integral number of bytes

Word-Oriented Memory Organization

- **Addresses Specify Byte Locations**
  - Address of first byte in word
  - Addresses of successive words differ by 4 (32-bit) or 8 (64-bit)

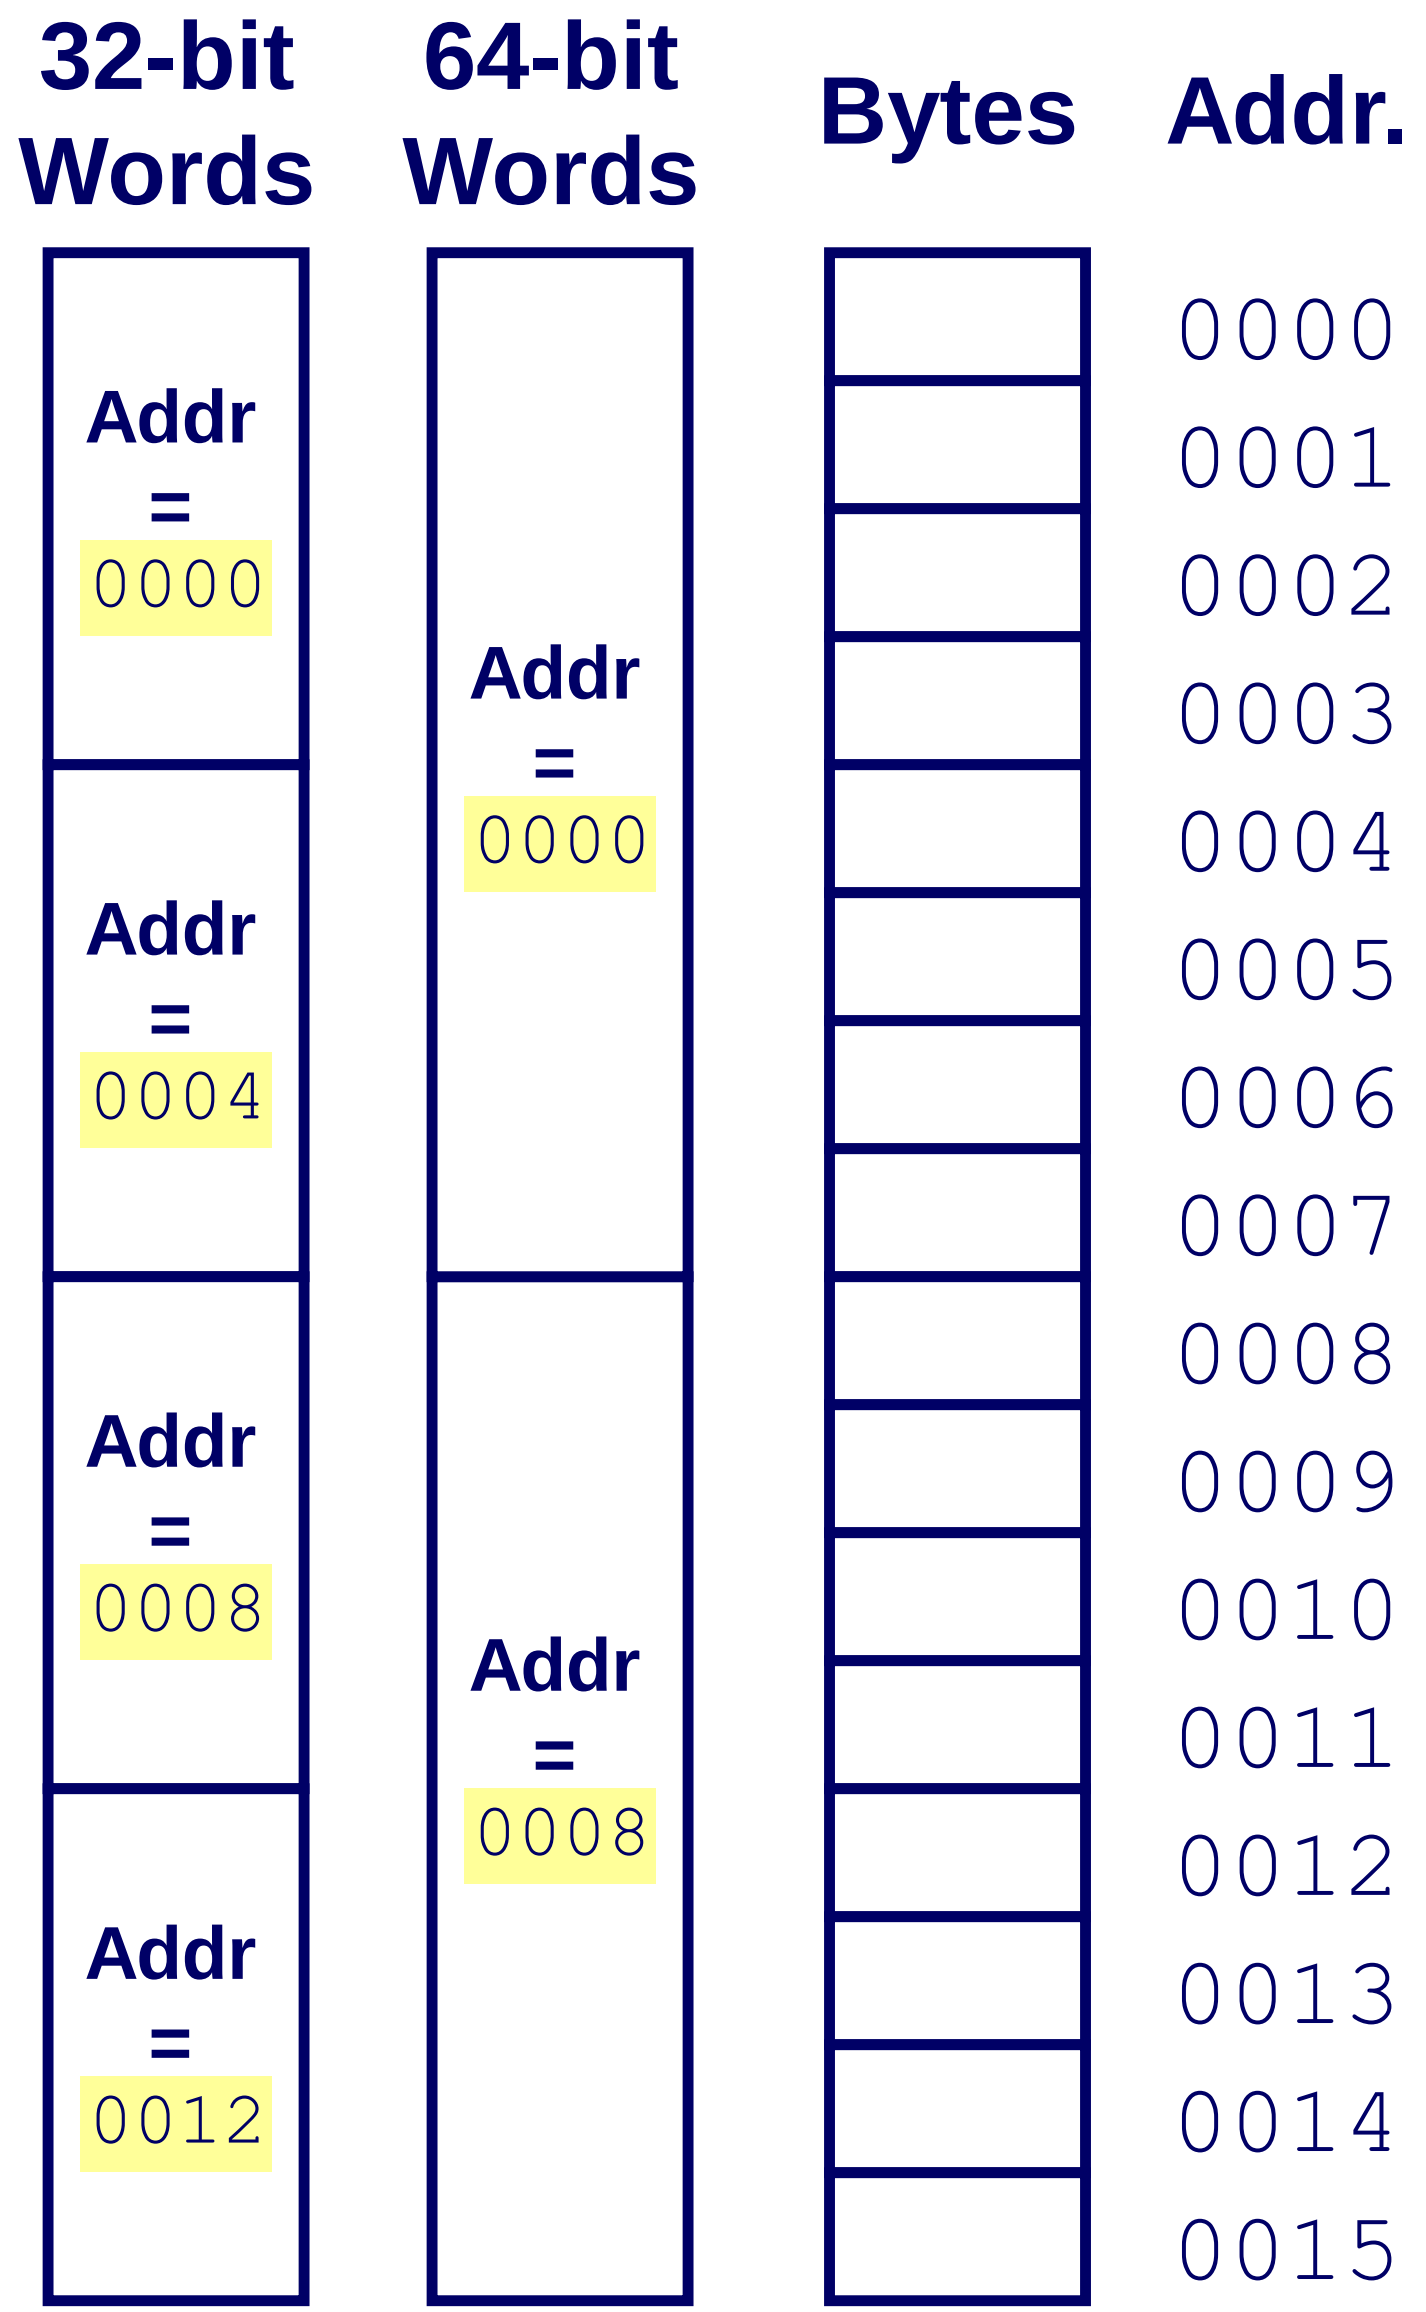

Data Representations

C Data Type	Typical 32-bit	Intel IA32	x86-64
char	1	1	1
short	2	2	2
int	4	4	4
long	4	4	8
long long	8	8	8
float	4	4	4
double	8	8	8
long double	8	10/12	10/16
pointer	4	4	8

Byte Ordering

- **How should bytes within a multi-byte word be ordered in memory?**
- **Conventions**
  - Big Endian: Sun, PPC Mac, Internet
    - Least significant byte has highest address
  - Little Endian: x86
    - Least significant byte has lowest address

Byte Ordering Example

- **Big Endian**
  - Least significant byte has highest address
- **Little Endian**
  - Least significant byte has lowest address
- **Example**
  - Variable x has 4-byte representation 0x01234567
  - Address given by &x is 0x100

Big Endian

		0x100	0x101	0x102	0x103		
		01	23	45	67		

Little Endian

		0x100	0x101	0x102	0x103		
		67	45	23	01		

Reading Byte-Reversed Listings

- **Disassembly**
  - Text representation of binary machine code
  - Generated by program that reads the machine code
- **Example Fragment**

Address	Instruction Code	Assembly Rendition	
`8048365:`	`5b`	`pop`	`%ebx`
`8048366:`	`81 c3 ab 12 00 00`	`add`	`$0x12ab,%ebx`
`804836c:`	`83 bb 28 00 00 00 00`	`cmpl`	`$0x0,0x28(%ebx)`

- **Deciphering Numbers**
  - Value: 0x12ab
  - Pad to 32 bits: 0x000012ab
  - Split into bytes: 00 00 12 ab
  - Reverse: ab 12 00 00

Representing Integers

Decimal:	15213			
Binary:	0011	1011	0110	1101
Hex:	3	B	6	D

int A = 15213;

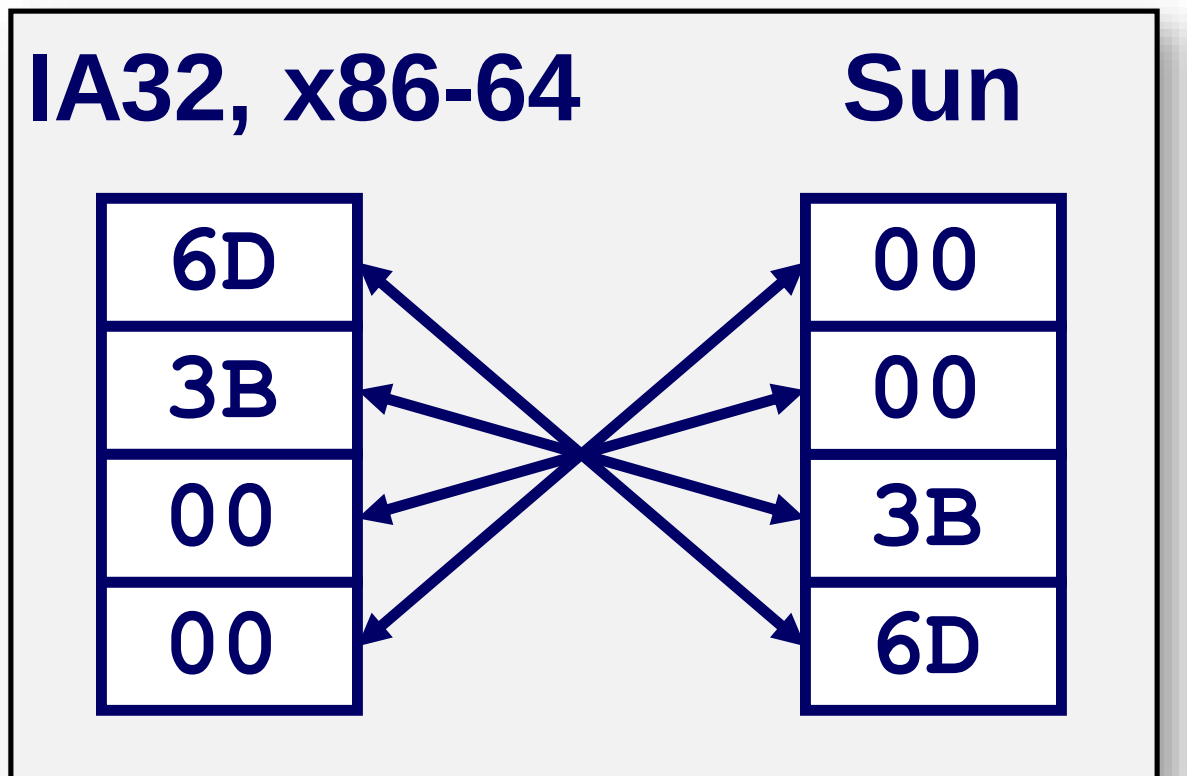

int B = -15213;

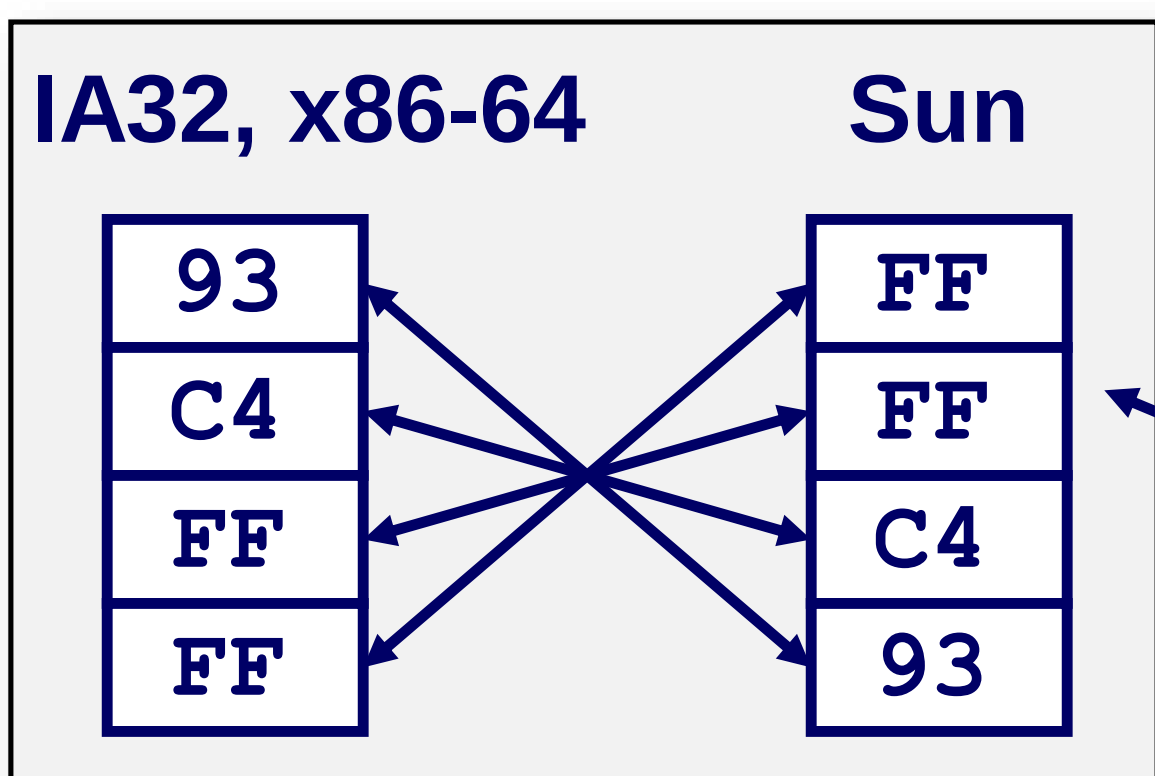

long int C = 15213;

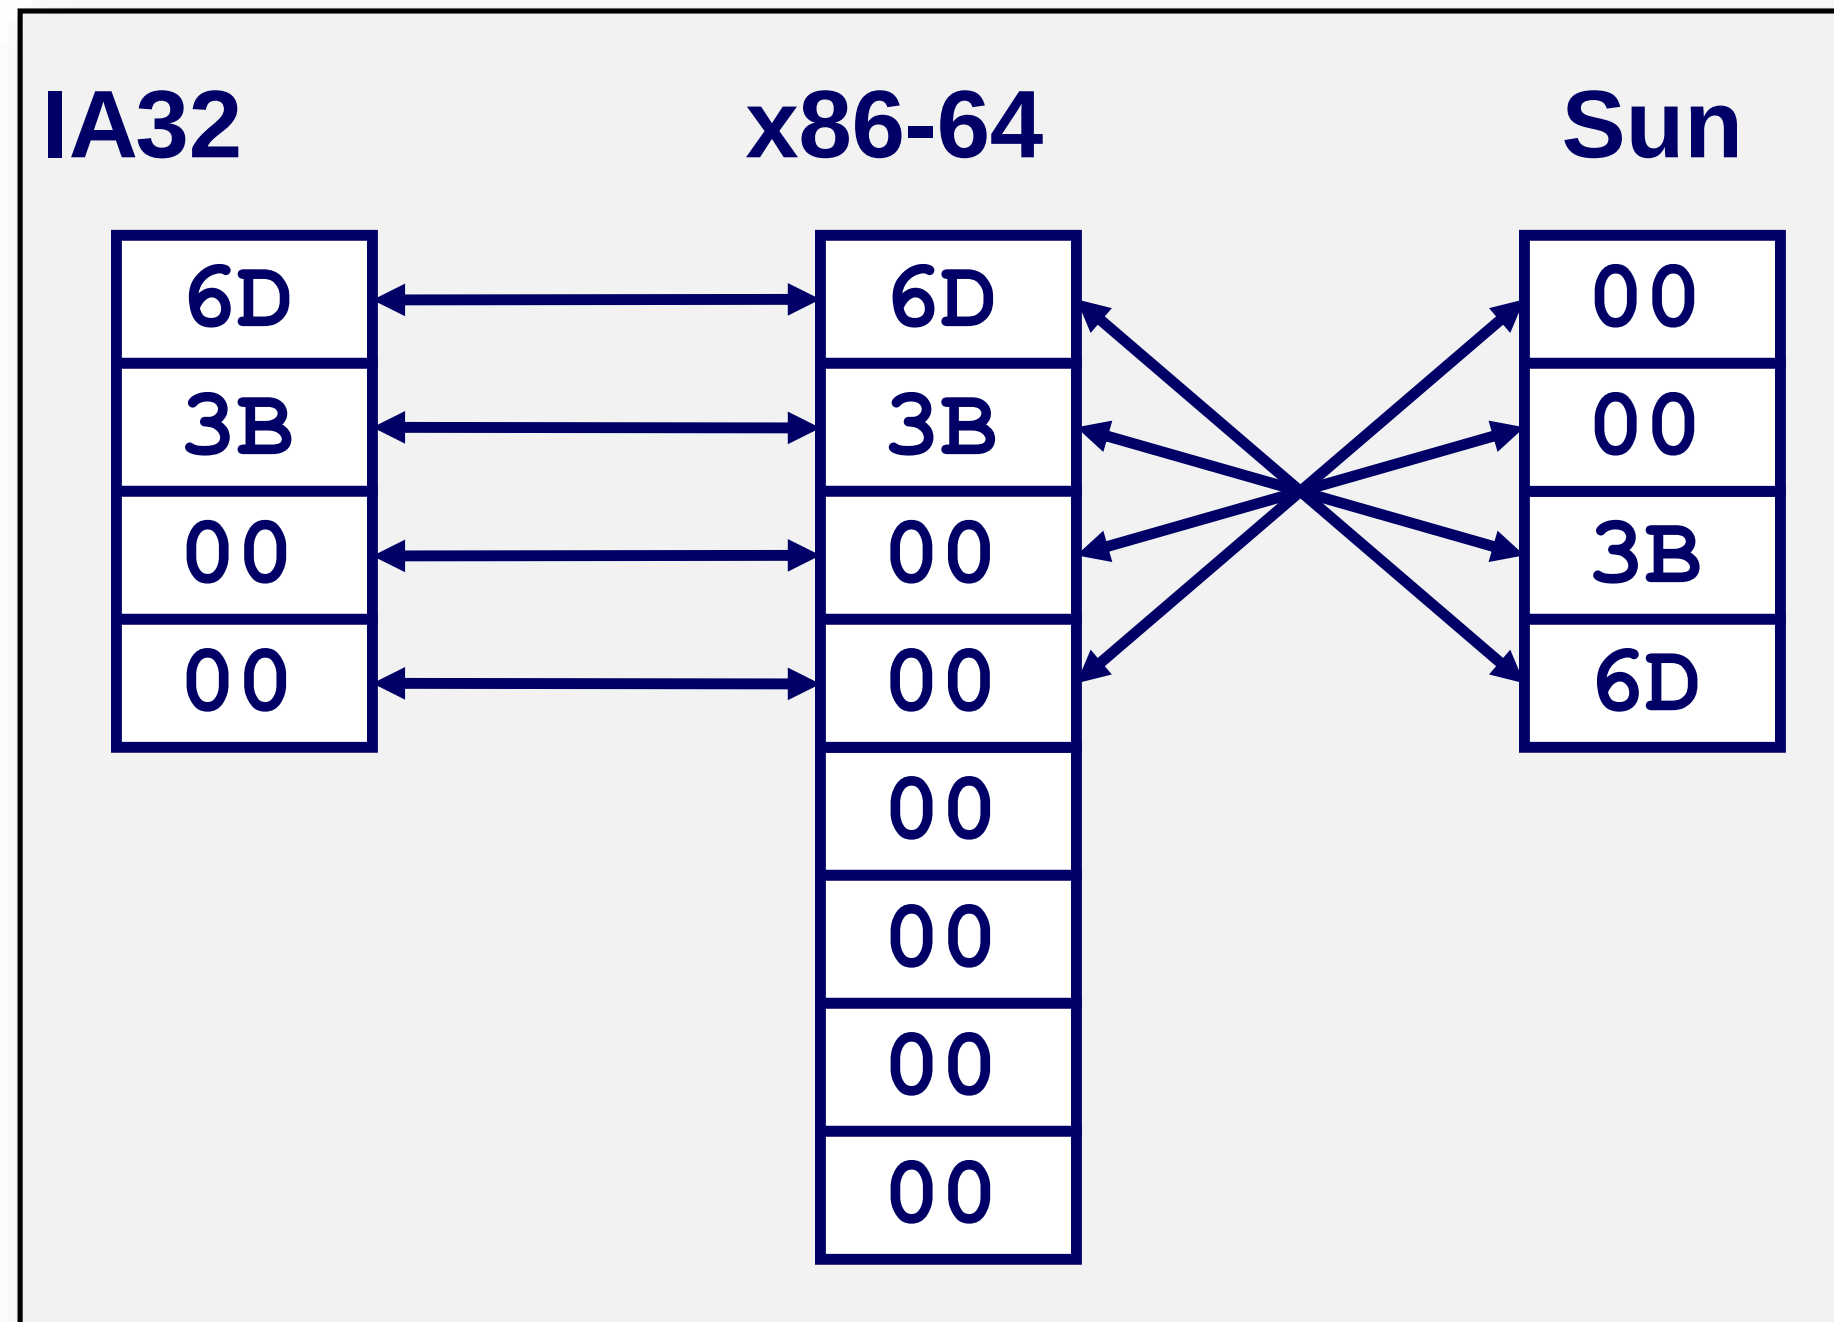

Two's complement representation (Covered later)

Representing Strings

```
char S[6] = "18243";
```

- **Strings in C**
  - Represented by array of characters
  - Each character encoded in ASCII format
    - Standard 7-bit encoding of character set
    - Character “0” has code 0x30
      - Digit *i* has code 0x30+*i*
  - String should be null-terminated
    - Final character = 0
- **Compatibility**
  - Byte ordering not an issue

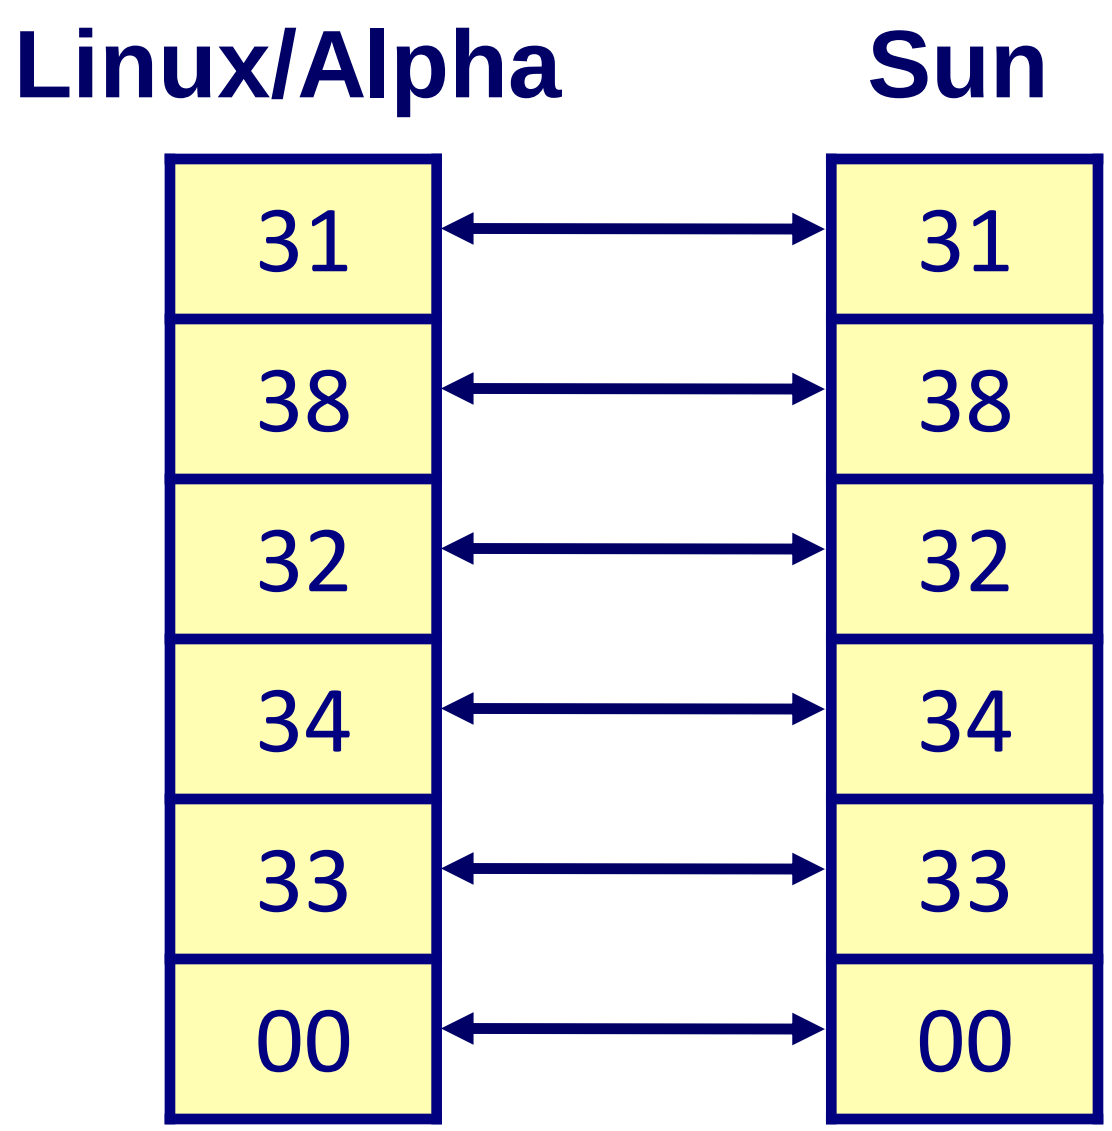

Today: Bits, Bytes, and Integers

- Representing information as bits
- **Bit-level manipulations**
- Integers
  - Representation: unsigned and signed
  - Conversion, casting
  - Expanding, truncating
  - Addition, negation, multiplication, shifting
- Summary

Boolean Algebra

- **Developed by George Boole in 19th Century**
  - Algebraic representation of logic
    - Encode "True" as 1 and "False" as 0

And

- **A&B = 1 when both A=1 and B=1**

&	0	1
0	0	0
1	0	1

Or

- **A|B = 1 when either A=1 or B=1**

|	0	1
0	0	1
1	1	1

Not

- **~A = 1 when A=0**

~	
0	1
1	0

Exclusive-Or (Xor)

- **A^B = 1 when either A=1 or B=1, but not both**

^	0	1
0	0	1
1	1	0

General Boolean Algebras

- **Operate on Bit Vectors**
  - Operations applied bitwise

```
  01101001      01101001      01101001
& 01010101    | 01010101    ^ 01010101    ~ 01010101
  01000001      01111101      00111100      10101010
```

- **All of the Properties of Boolean Algebra Apply**

Representing & Manipulating Sets

- **Representation**
  - Width w bit vector represents subsets of {0, …, w–1}
  - $a_j = 1$ if $j \in A$
    - 01101001 { 0, 3, 5, 6 }
    - *76543210*
    - 01010101 { 0, 2, 4, 6 }
    - *76543210*
- **Operations**
  - & Intersection 01000001 { 0, 6 }
  - | Union 01111101 { 0, 2, 3, 4, 5, 6 }
  - ^ Symmetric difference 00111100 { 2, 3, 4, 5 }
  - ~ Complement 10101010 { 1, 3, 5, 7 }

Bit-Level Operations in C

- **Operations &, |, ~, ^ Available in C**
  - Apply to any “integral” data type
    - long, int, short, char, unsigned
  - View arguments as bit vectors
  - Arguments applied bit-wise
- **Examples (Char data type)**
  - ~0x41 = 0xBE
    - ~01000001_2 = 10111110_2
  - ~0x00 = 0xFF
    - ~00000000_2 = 11111111_2
  - 0x69 & 0x55 = 0x41
    - 01101001_2 & 01010101_2 = 01000001_2
  - 0x69 | 0x55 = 0x7D
    - 01101001_2 | 01010101_2 = 01111101_2

Contrast: Logic Operations in C

- **Contrast to Logical Operators**
  - &&, ||, !
    - View 0 as "False"
    - Anything nonzero as "True"
    - Always return 0 or 1
    - Early termination
- **Examples (char data type)**
  - !0x41 = 0x00
  - !0x00 = 0x01
  - !!0x41 = 0x01
  - 0x69 && 0x55 = 0x01
  - 0x69 || 0x55 = 0x01

Shift Operations

- **Left Shift: x << y**
  - Shift bit-vector x left y positions
    - Throw away extra bits on left
    - Fill with 0's on right
- **Right Shift: x >> y**
  - Shift bit-vector x right y positions
    - Throw away extra bits on right
  - Logical shift
    - Fill with 0's on left
  - Arithmetic shift
    - Replicate most significant bit on right
- **Undefined Behavior**
  - Shift amount < 0 or ≥ word size

Argument x	01100010
<< 3	00010*000*
Log. >> 2	*00*011000
Arith. >> 2	*00*011000

Argument x	10100010
<< 3	00010*000*
Log. >> 2	*00*101000
Arith. >> 2	*11*101000

Today: Bits, Bytes, and Integers

- Representing information as bits
- Bit-level manipulations
- **Integers**
  - **Representation: unsigned and signed**
  - Conversion, casting
  - Expanding, truncating
  - Addition, negation, multiplication, shifting
- Summary

Encoding Integers

Unsigned

$$B2U(X) = \sum_{i=0}^{w-1} x_i \cdot 2^i$$

Two's Complement

$$B2T(X) = -x_{w-1} \cdot 2^{w-1} + \sum_{i=0}^{w-2} x_i \cdot 2^i$$

Sign Bit

```
short int x =  15213;
short int y = -15213;
```

- **C `short` 2 bytes long**

	Decimal	Hex	Binary
`x`	15213	`3B 6D`	`00111011 01101101`
`y`	-15213	`C4 93`	`11000100 10010011`

- **Sign Bit**
  - For 2's complement, most significant bit indicates sign
    - 0 for nonnegative
    - 1 for negative

Encoding Example (Cont.)

```
x =      15213: 00111011 01101101
y =     -15213: 11000100 10010011
```

Weight	15213		-15213	
1	1	1	1	1
2	0	0	1	2
4	1	4	0	0
8	1	8	0	0
16	0	0	1	16
32	1	32	0	0
64	1	64	0	0
128	0	0	1	128
256	1	256	0	0
512	1	512	0	0
1024	0	0	1	1024
2048	1	2048	0	0
4096	1	4096	0	0
8192	1	8192	0	0
16384	0	0	1	16384
-32768	0	0	1	-32768
Sum		**15213**		**-15213**

Values for Different Word Sizes

	W			
	8	**16**	**32**	**64**
UMax	255	65,535	4,294,967,295	18,446,744,073,709,551,615
TMax	127	32,767	2,147,483,647	9,223,372,036,854,775,807
TMin	-128	-32,768	-2,147,483,648	-9,223,372,036,854,775,808

- **Observations**
  - $|TMin| = TMax + 1$
    - Asymmetric range
  - $UMax = 2 * TMax + 1$

- **C Programming**
  - #include <limits.h>
  - Declares constants, e.g.,
    - ULONG_MAX
    - LONG_MAX
    - LONG_MIN
  - Values platform specific

Today: Bits, Bytes, and Integers

- Representing information as bits
- Bit-level manipulations
- **Integers**
  - Representation: unsigned and signed
  - **Conversion, casting**
  - Expanding, truncating
  - Addition, negation, multiplication, shifting
- Summary

Conversion Visualized

- **2's Comp. □ Unsigned**
  - Ordering Inversion
  - Negative □ Big Positive

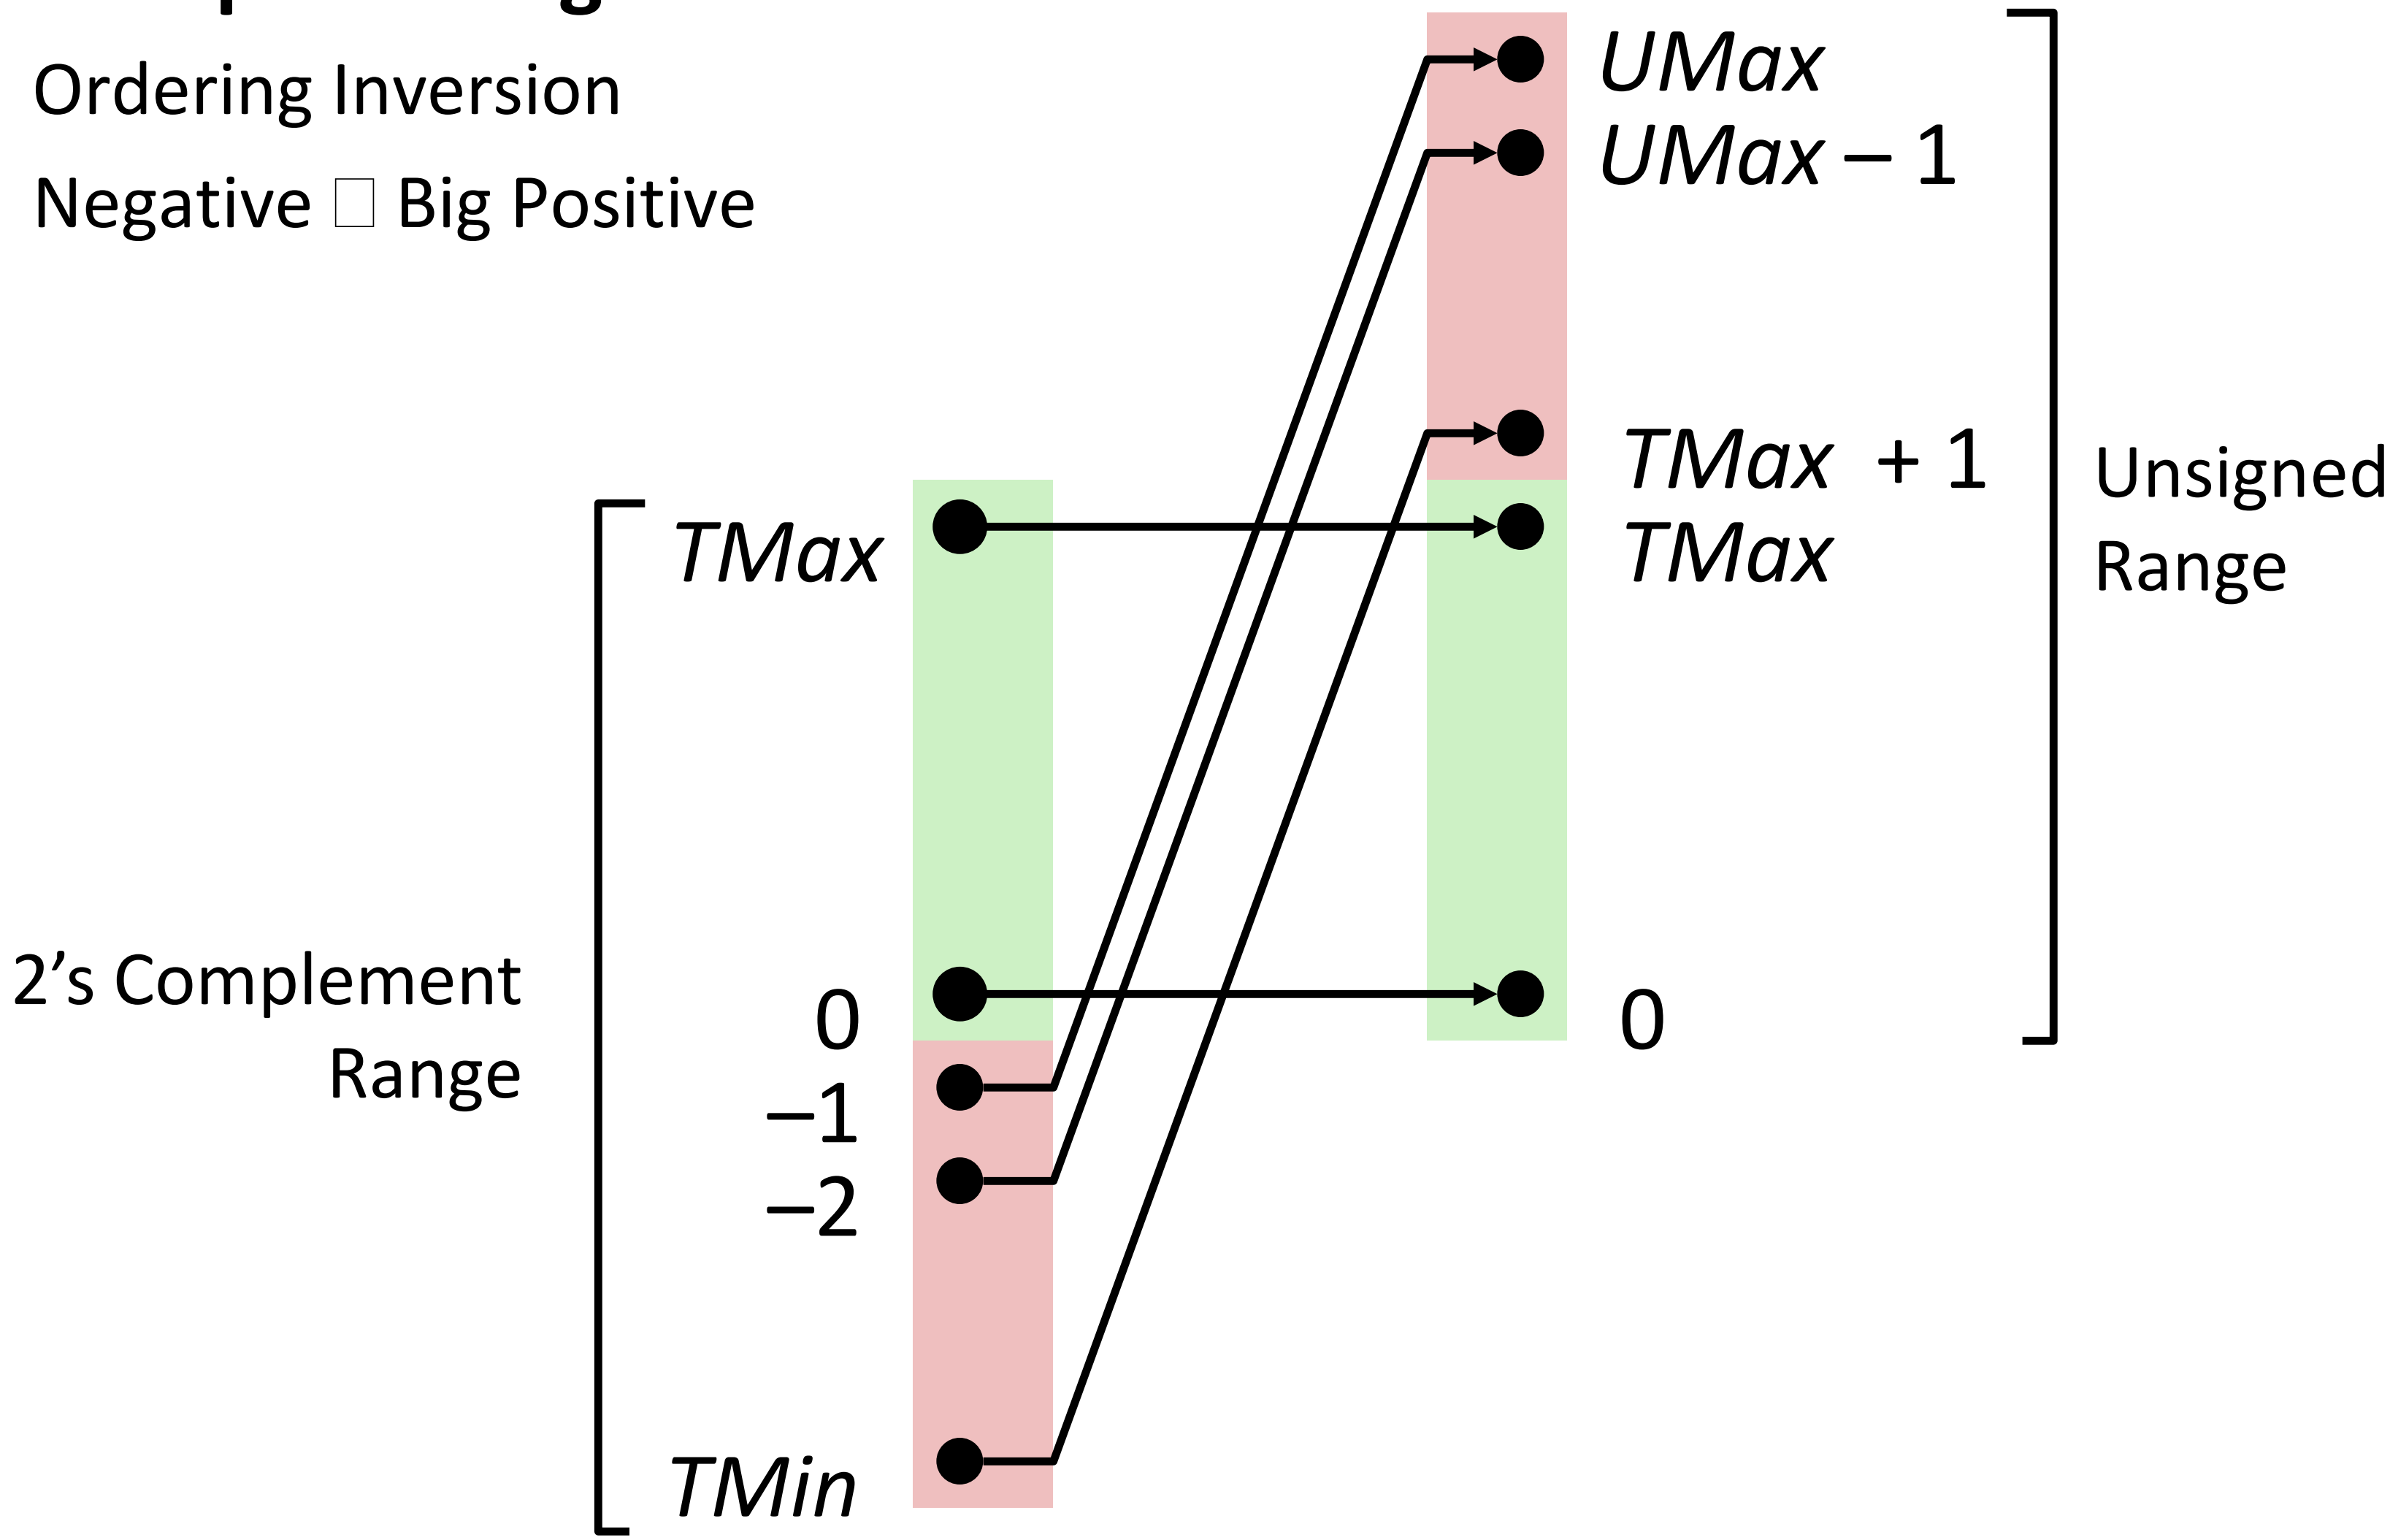

Signed vs. Unsigned in C

- **Constants**
  - By default are considered to be signed integers
  - Unsigned if have "U" as suffix

    ```
    0U, 4294967259U
    ```

- **Casting**
  - Explicit casting between signed & unsigned same as U2T and T2U

    ```
    int tx, ty;
    unsigned ux, uy;
    tx = (int) ux;
    uy = (unsigned) ty;
    ```

  - Implicit casting also occurs via assignments and procedure calls

    ```
    tx = ux;
    uy = ty;
    ```

Casting Surprises

- **Expression Evaluation**
  - If there is a mix of unsigned and signed in single expression, ***signed values implicitly cast to unsigned***
  - Including comparison operations **<, >, ==, <=, >=**
  - Examples for $W = 32$: **TMIN = -2,147,483,648 ,** **TMAX = 2,147,483,647**

Constant$_1$	Constant$_2$	Relation	Evaluation
0	0U	==	unsigned
-1	0	<	signed
-1	0U	>	unsigned
2147483647	-2147483647-1	>	signed
2147483647U	-2147483647-1	<	unsigned
-1	-2	>	signed
(unsigned)-1	-2	>	unsigned
2147483647	2147483648U	<	unsigned
2147483647	(int) 2147483648U	>	signed

Summary
Casting Signed ↔ Unsigned: Basic Rules

- Bit pattern is maintained
- But reinterpreted
- Can have unexpected effects: adding or subtracting 2^w

- Expression containing signed and unsigned int
  - `int` is cast to `unsigned`!!

Today: Bits, Bytes, and Integers

- Representing information as bits
- Bit-level manipulations
- **Integers**
  - Representation: unsigned and signed
  - Conversion, casting
  - **Expanding, truncating**
  - Addition, negation, multiplication, shifting
- Summary

Sign Extension

- **Task:**
  - Given w-bit signed integer x
  - Convert it to $w+k$-bit integer with same value
- **Rule:**
  - Make k copies of sign bit:
  - $X' = \underbrace{x_{w-1}, \ldots, x_{w-1}}_{k \text{ copies of MSB}}, x_{w-1}, x_{w-2}, \ldots, x_0$

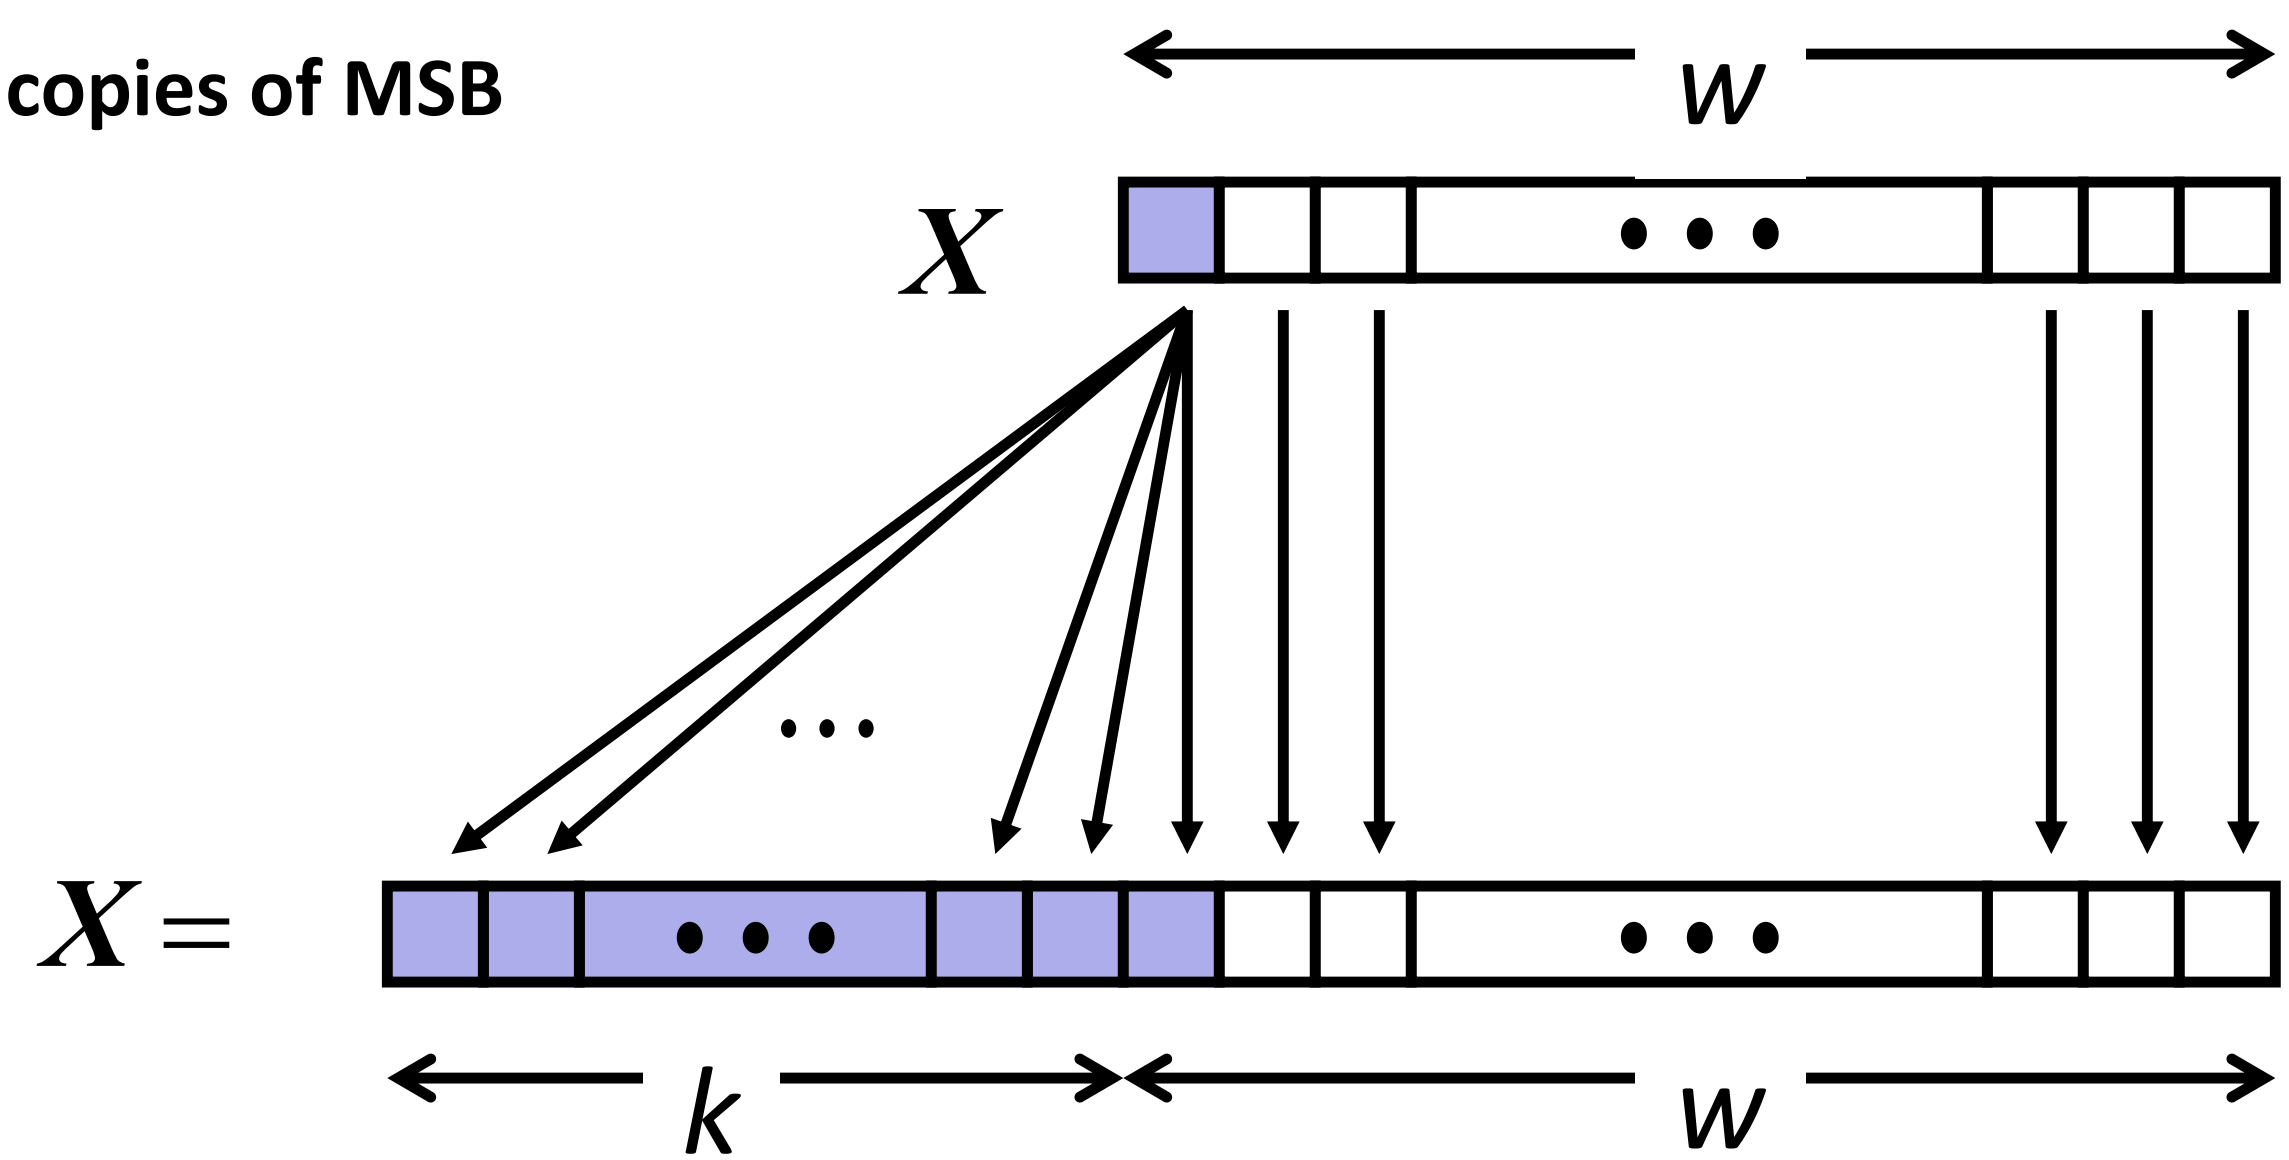

Sign Extension Example

```
short int x =  15213;
int      ix = (int) x;
short int y = -15213;
int      iy = (int) y;
```

	Decimal	Hex	Binary
x	15213	3B 6D	00111011 01101101
ix	15213	00 00 3B 6D	00000000 00000000 00111011 01101101
y	-15213	C4 93	11000100 10010011
iy	-15213	FF FF C4 93	11111111 11111111 11000100 10010011

- Converting from smaller to larger integer data type
- C automatically performs sign extension

Summary: Expanding, Truncating: Basic Rules

- **Expanding (e.g., short int to int)**
  - Unsigned: zeros added
  - Signed: sign extension
  - Both yield expected result

- **Truncating (e.g., unsigned to unsigned short)**
  - Unsigned/signed: bits are truncated
  - Result reinterpreted
  - Unsigned: mod operation
  - Signed: similar to mod
  - For small numbers yields expected behaviour

Today: Bits, Bytes, and Integers

- Representing information as bits
- Bit-level manipulations
- **Integers**
  - Representation: unsigned and signed
  - Conversion, casting
  - Expanding, truncating
  - **Addition, negation, multiplication, shifting**
- Summary

Negation: Complement & Increment

- **Claim: Following Holds for 2's Complement**

  `~x + 1 == -x`

- **Complement**
  - Observation: `~x + x == 1111…111 == -1`

	x	1	0	0	1	1	1	0	1
+	~x	0	1	1	0	0	0	1	0
	-1	1	1	1	1	1	1	1	1

- **Complete Proof?**

Complement & Increment Examples

x = 15213

	Decimal	Hex	Binary
`x`	15213	`3B 6D`	`00111011 01101101`
`~x`	-15214	`C4 92`	`11000100 10010010`
`~x+1`	-15213	`C4 93`	`11000100 10010011`
`y`	-15213	`C4 93`	`11000100 10010011`

x = 0

	Decimal	Hex	Binary
`0`	0	`00 00`	`00000000 00000000`
`~0`	-1	`FF FF`	`11111111 11111111`
`~0+1`	0	`00 00`	`00000000 00000000`

Unsigned Addition

Operands: *w* bits

True Sum: *w*+1 bits

Discard Carry: *w* bits

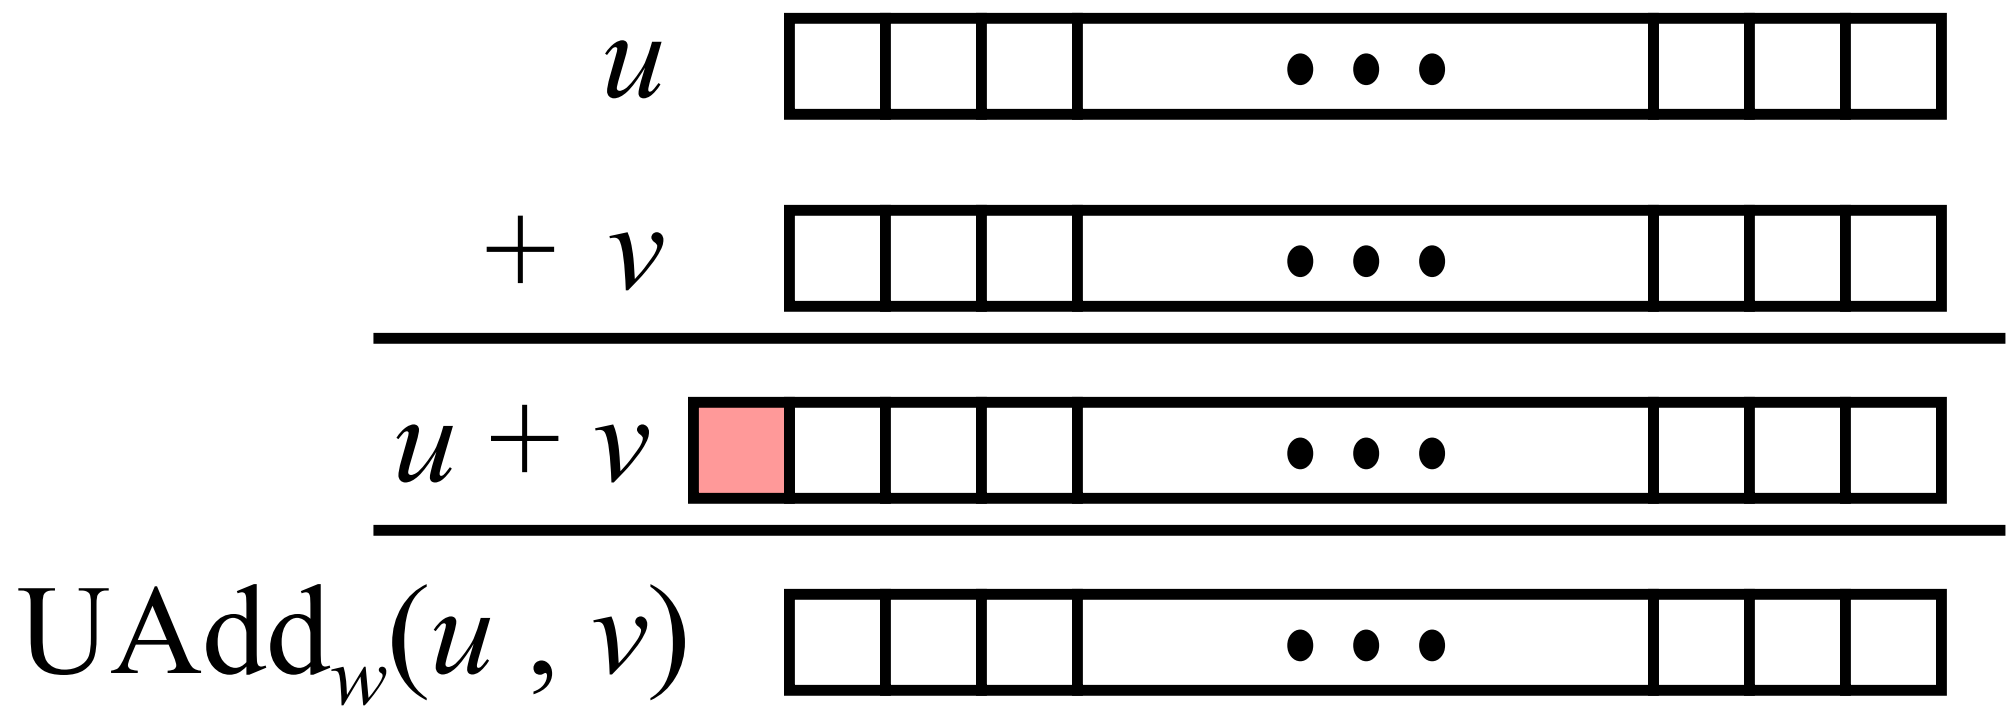

- **Standard Addition Function**
  - Ignores carry output
- **Implements Modular Arithmetic**

  s = $\mathrm{UAdd}_w(u\ ,\ v)$ = $u + v \bmod 2^w$

$$UAdd_w(u,v) \;=\; \begin{cases} u+v & u+v < 2^w \\ u+v-2^w & u+v \geq 2^w \end{cases}$$

Two's Complement Addition

Operands: *w* bits

True Sum: *w*+1 bits

Discard Carry: *w* bits

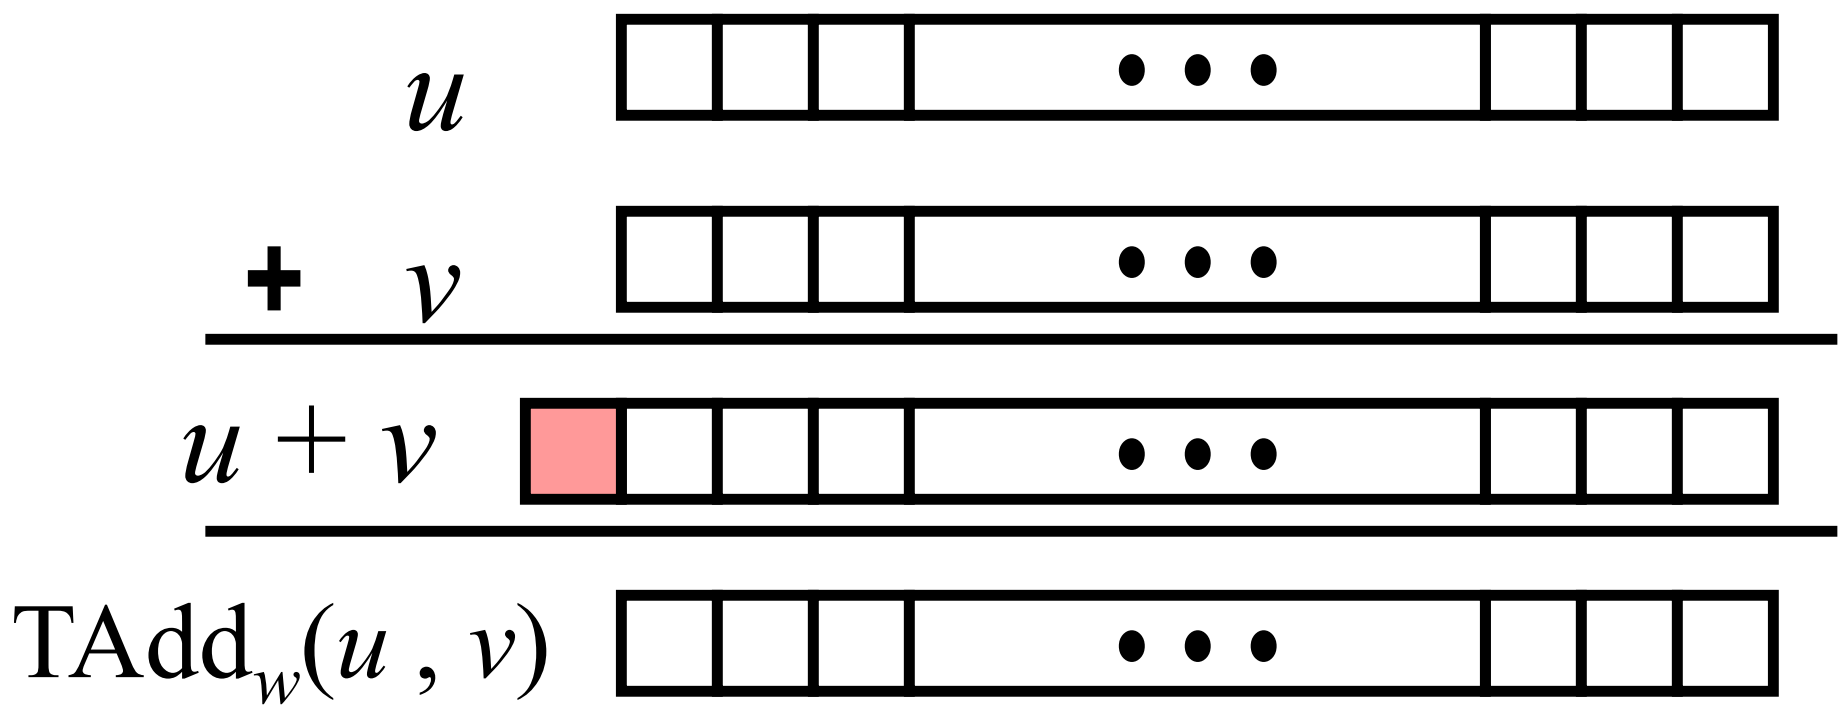

- **TAdd and UAdd have Identical Bit-Level Behavior**
  - Signed vs. unsigned addition in C:

```
int s, t, u, v;
s = (int) ((unsigned) u + (unsigned) v);
t = u + v
```

  - Will give `s == t`

TAdd Overflow

- **Functionality**
  - True sum requires w+1 bits
  - Drop off MSB
  - Treat remaining bits as 2's comp. integer

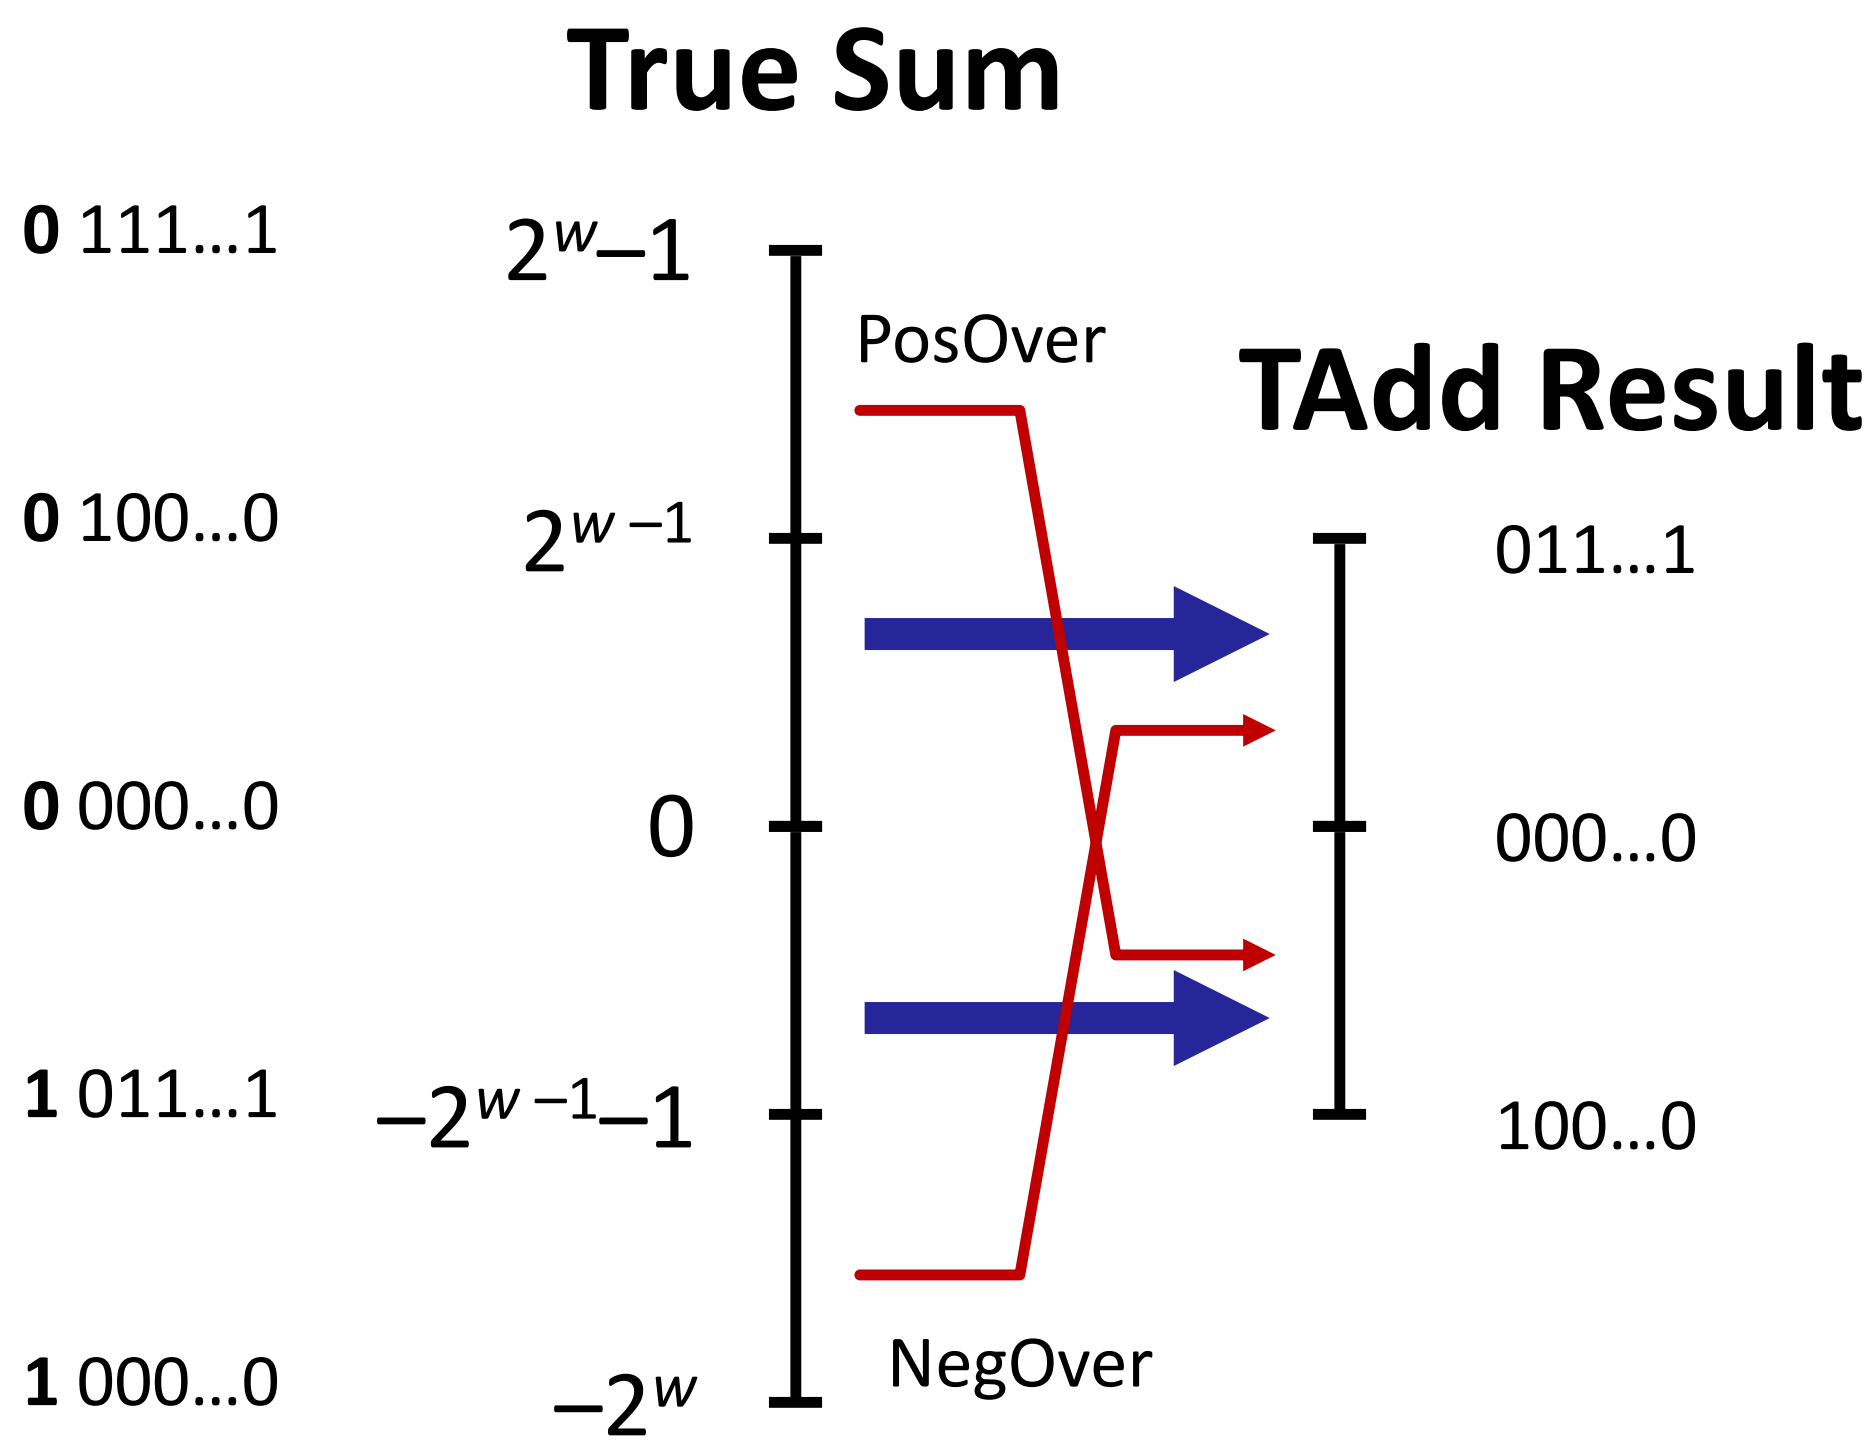

Multiplication

- **Computing Exact Product of *w*-bit numbers *x*, *y***
  - Either signed or unsigned
- **Ranges**
  - Unsigned: $0 \le x * y \le (2^w - 1)^2 = 2^{2w} - 2^{w+1} + 1$
    - Up to $2w$ bits
  - Two's complement min: $x * y \ge (-2^{w-1})*(2^{w-1}-1) = -2^{2w-2} + 2^{w-1}$
    - Up to $2w-1$ bits
  - Two's complement max: $x * y \le (-2^{w-1})^2 = 2^{2w-2}$
    - Up to $2w$ bits, but only for $(TMin_w)^2$
- **Maintaining Exact Results**
  - Would need to keep expanding word size with each product computed
  - Done in software by "arbitrary precision" arithmetic packages

Unsigned Multiplication in C

Operands: *w* bits

True Product: 2**w* bits

Discard *w* bits: *w* bits

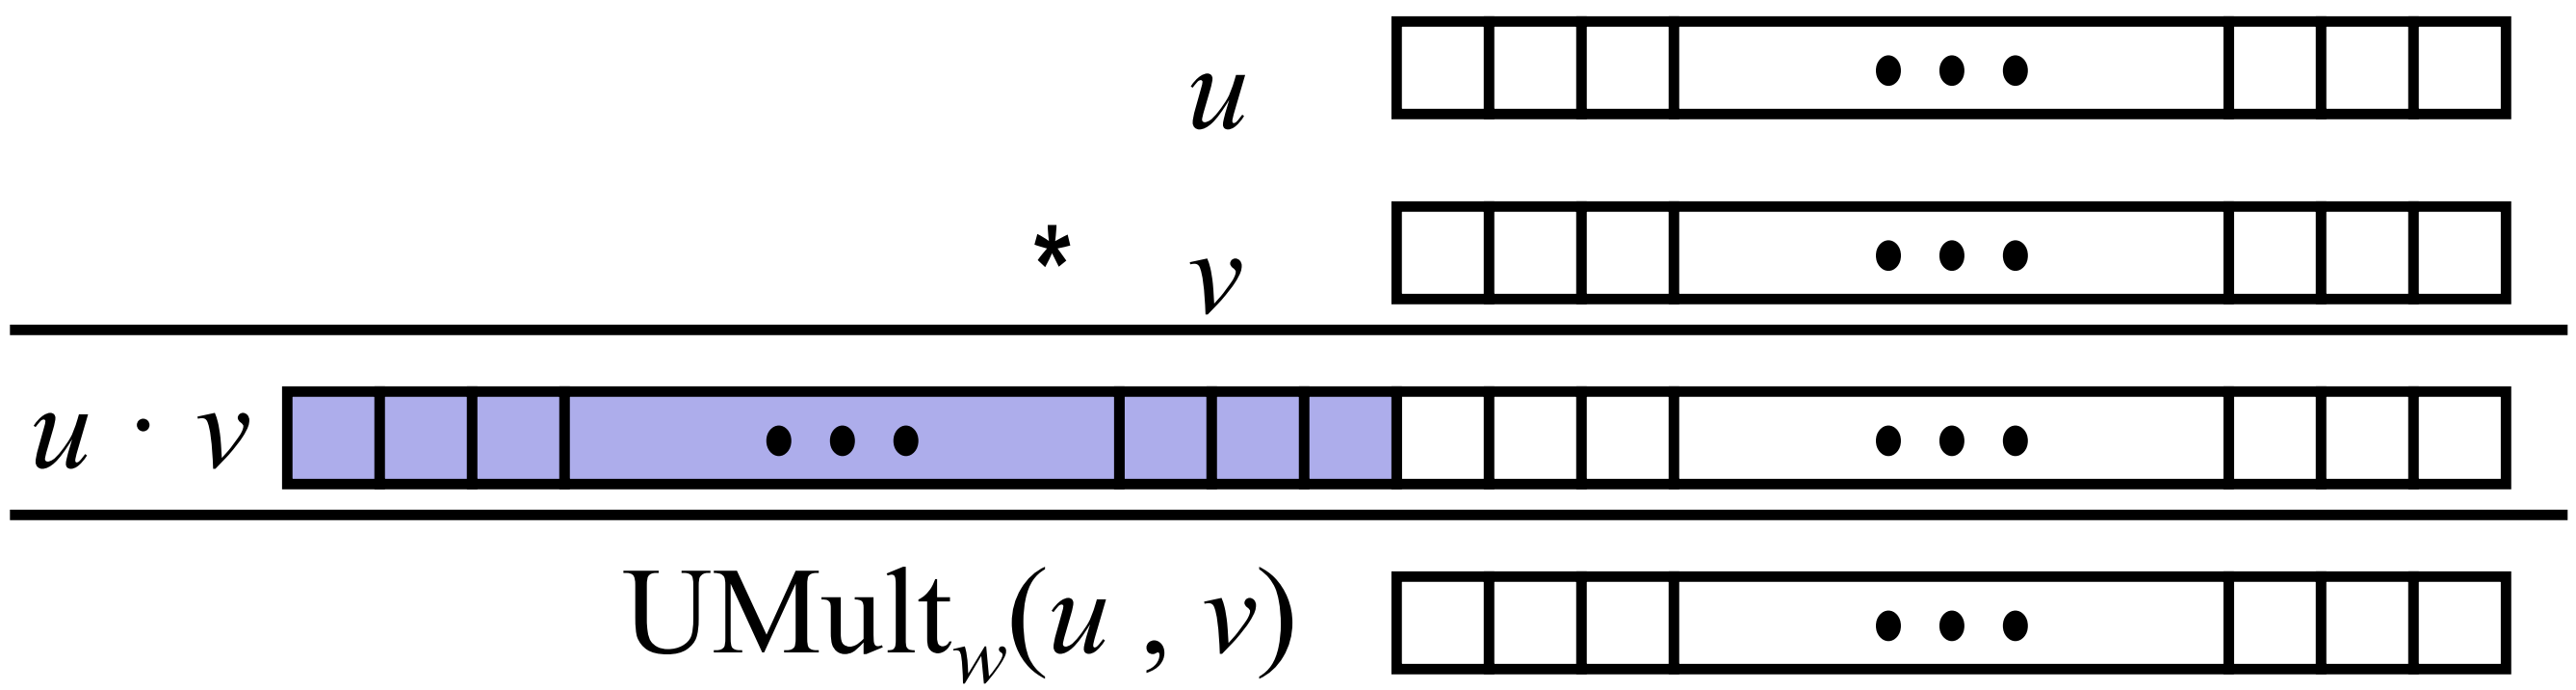

- **Standard Multiplication Function**
  - Ignores high order *w* bits
- **Implements Modular Arithmetic**

$\mathrm{UMult}_w(u, v) = u \cdot v \bmod 2^w$

Signed Multiplication in C

Operands: *w* bits

True Product: 2**w* bits

Discard *w* bits: *w* bits

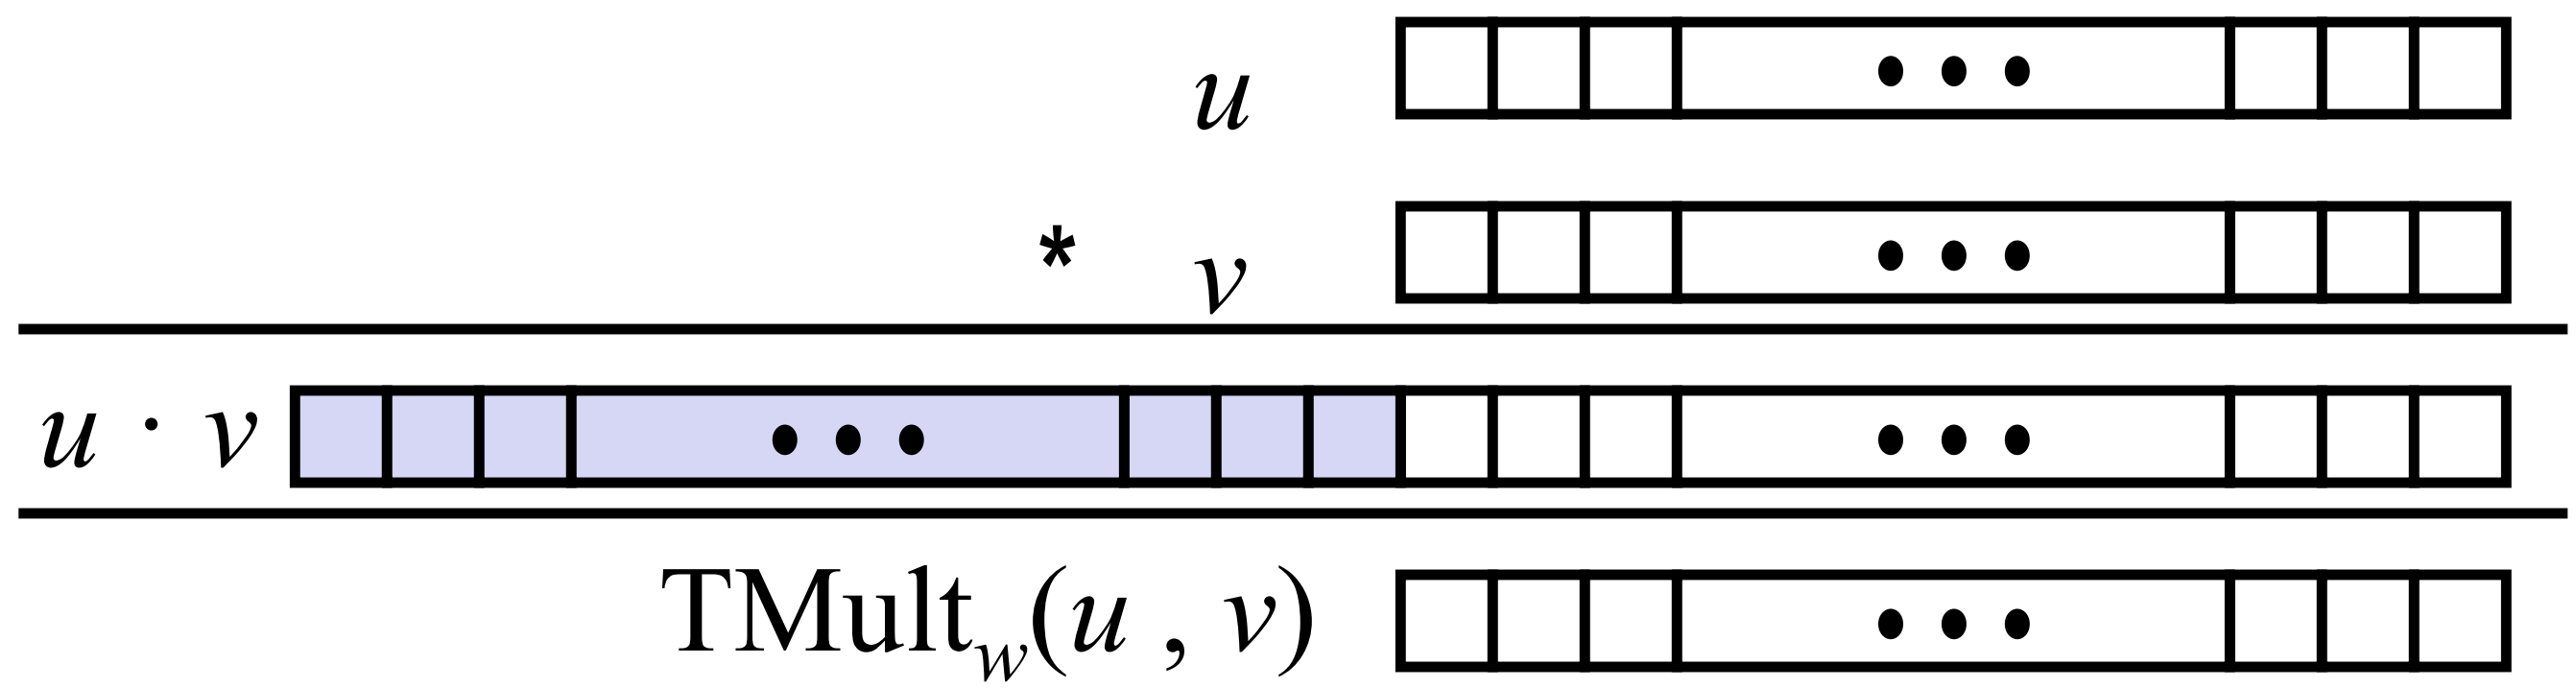

- **Standard Multiplication Function**
  - Ignores high order *w* bits
  - Some of which are different for signed vs. unsigned multiplication
  - Lower bits are the same

Power-of-2 Multiply with Shift

- **Operation**
  - `u << k` gives `u * 2`^{k}
  - Both signed and unsigned

Operands: *w* bits

True Product: *w*+*k* bits

Discard *k* bits: *w* bits

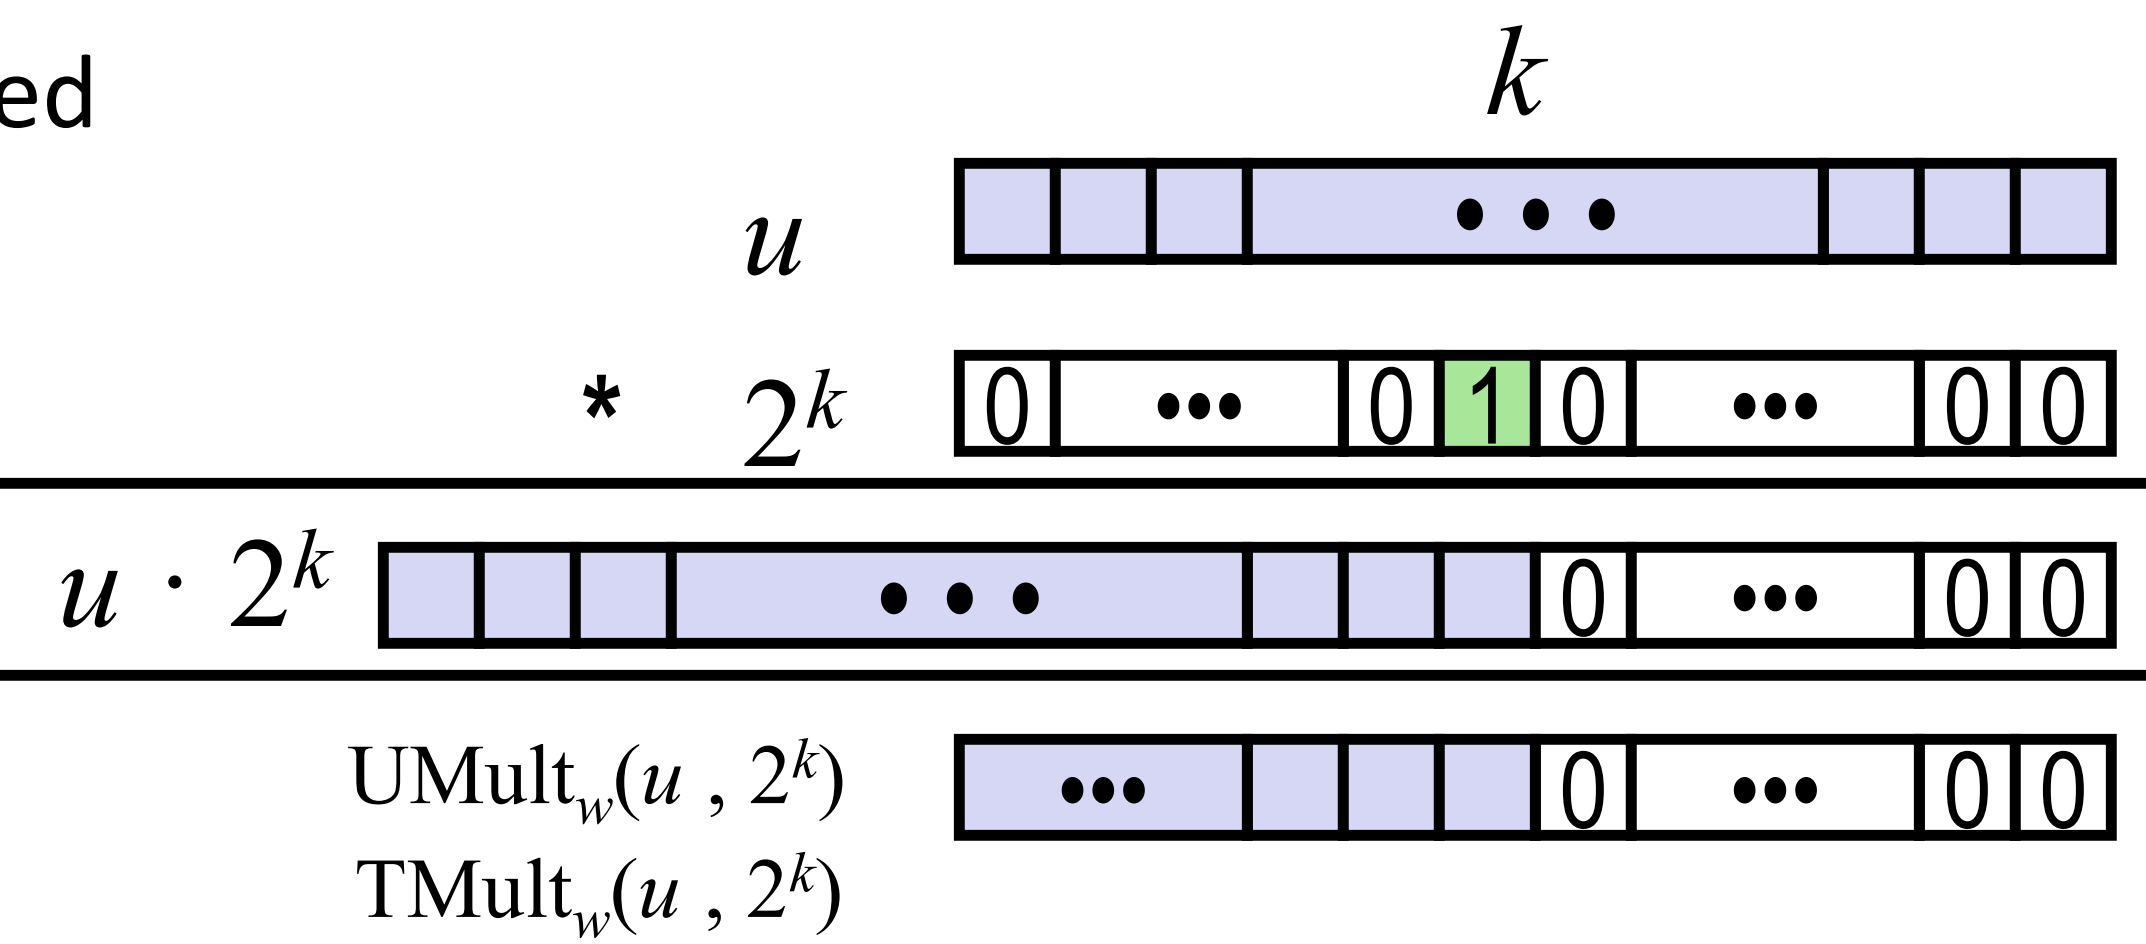

- **Examples**
  - `u << 3`   `==`   `u * 8`
  - `u << 5 - u << 3`   `==`   `u * 24`
  - Most machines shift and add faster than multiply
    - Compiler generates this code automatically

Compiled Multiplication Code

C Function

```
int mul12(int x)
{
  return x*12;
}
```

Compiled Arithmetic Operations

```
  leal (%eax,%eax,2), %eax
  sall $2, %eax
```

Explanation

```
  t <- x+x*2
  return t << 2;
```

- **C compiler automatically generates shift/add code when multiplying by constant**

Unsigned Power-of-2 Divide with Shift

- **Quotient of Unsigned by Power of 2**
  - `u >> k` gives $\lfloor \texttt{u} / 2^k \rfloor$
  - Uses logical shift

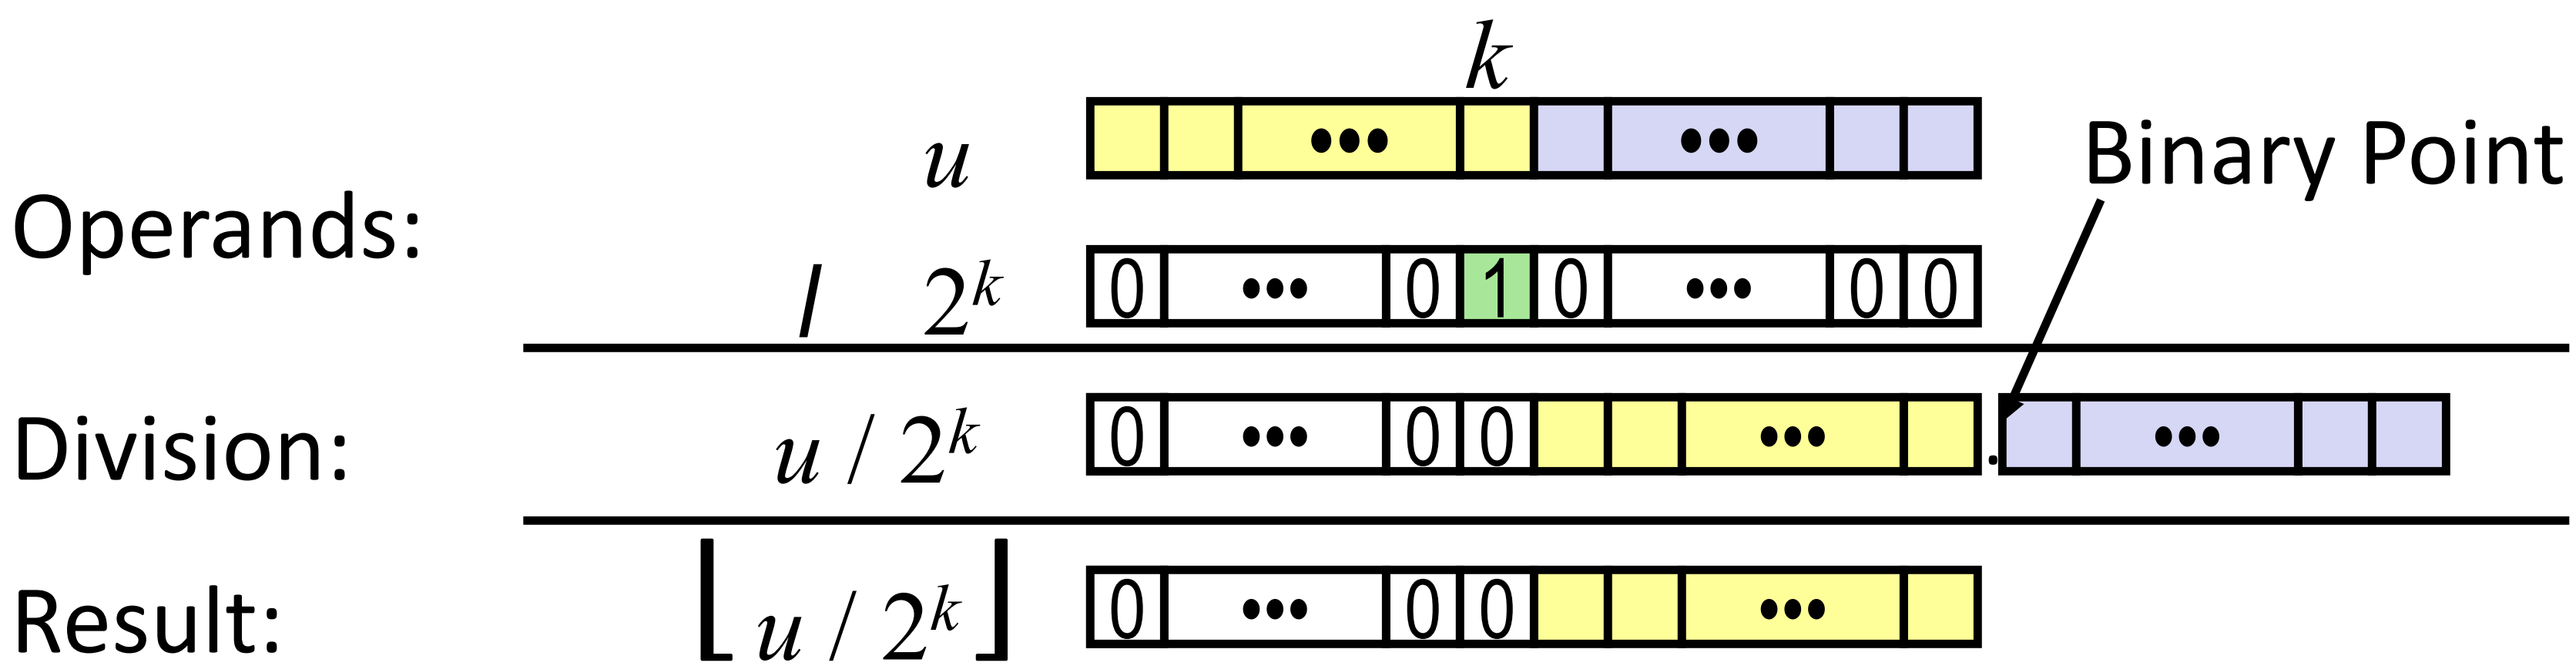

	Division	Computed	Hex	Binary
`x`	15213	15213	`3B 6D`	`00111011 01101101`
`x >> 1`	7606.5	7606	`1D B6`	`00011101 10110110`
`x >> 4`	950.8125	950	`03 B6`	`00000011 10110110`
`x >> 8`	59.4257813	59	`00 3B`	`00000000 00111011`

Compiled Unsigned Division Code

C Function

```
unsigned udiv8(unsigned x)
{
  return x/8;
}
```

Compiled Arithmetic Operations

```
  shrl $3, %eax
```

Explanation

```
  # Logical shift
  return x >> 3;
```

- Uses logical shift for unsigned
- For Java Users
  - Logical shift written as >>>

Signed Power-of-2 Divide with Shift

- **Quotient of Signed by Power of 2**
  - `x >> k` gives $\lfloor \mathbf{x} / 2^k \rfloor$
  - Uses arithmetic shift
  - Rounds wrong direction when `u < 0`

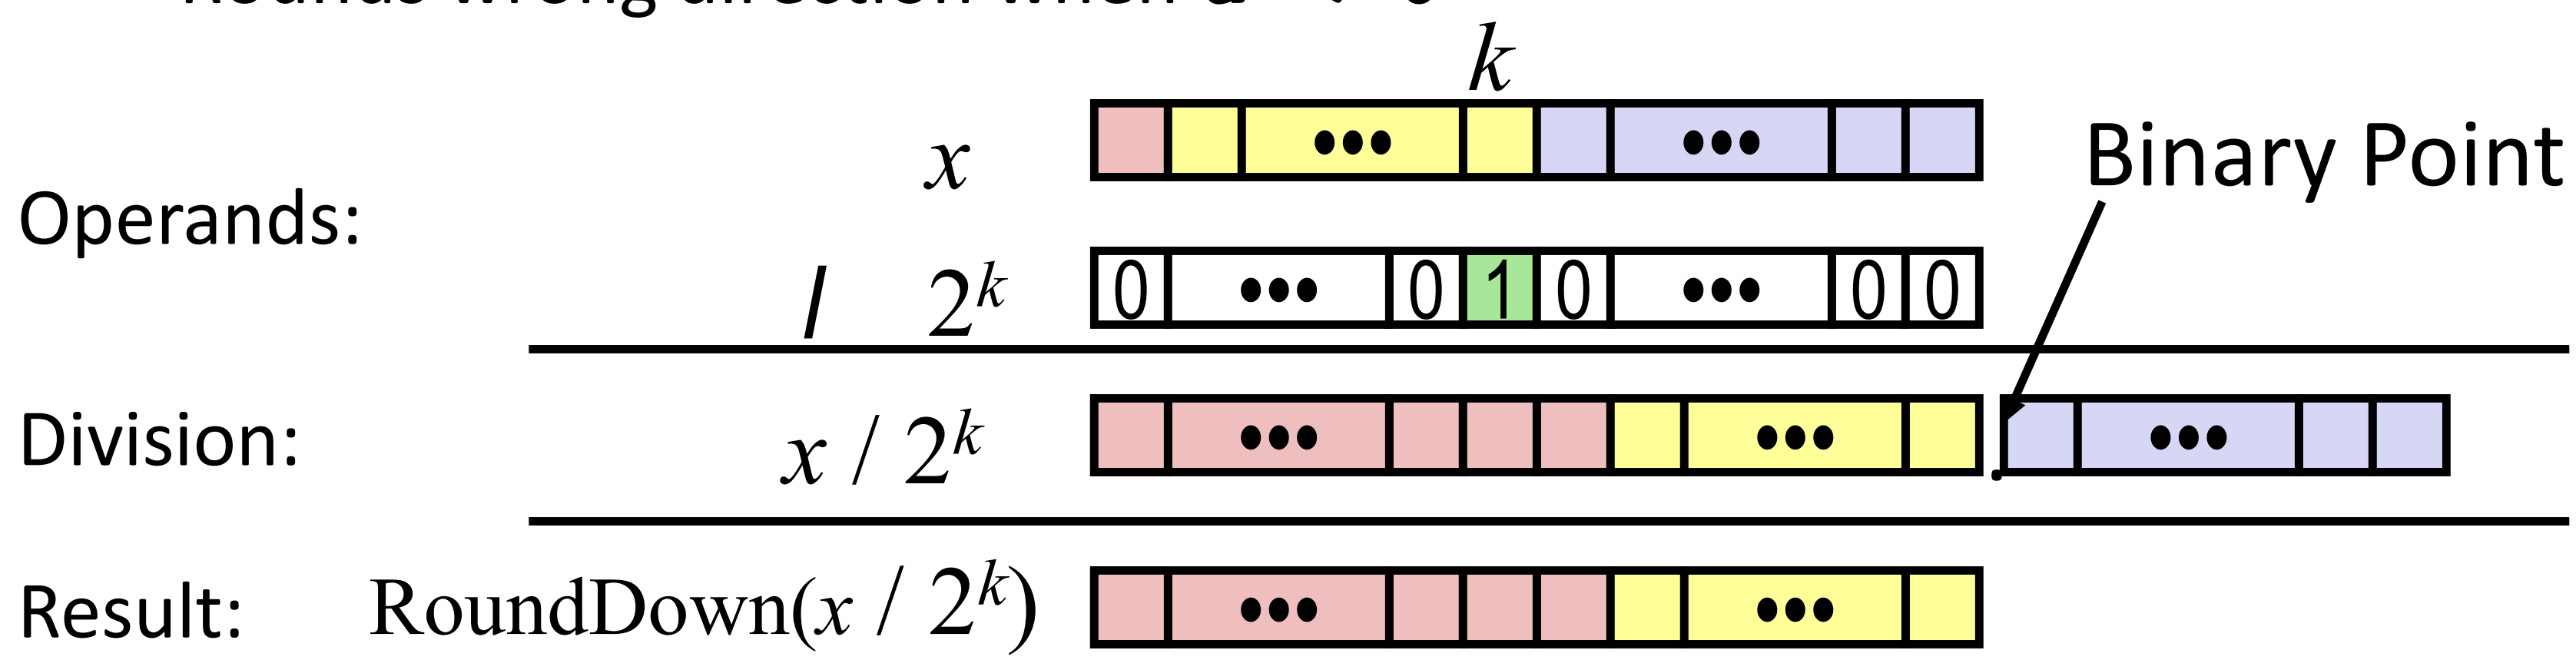

	Division	Computed	Hex	Binary
`y`	-15213	-15213	`C4 93`	`11000100 10010011`
`y >> 1`	-7606.5	-7607	`E2 49`	`11100010 01001001`
`y >> 4`	-950.8125	-951	`FC 49`	`11111100 01001001`
`y >> 8`	-59.4257813	-60	`FF C4`	`11111111 11000100`

Correct Power-of-2 Divide

- **Quotient of Negative Number by Power of 2**
  - Want $\lceil$ `x / 2`^{k} $\rceil$ (Round Toward 0)
  - Compute as $\lfloor$ `(x+2`^{k}`-1) / 2`^{k} $\rfloor$
  - In C: `(x + (1<<k)-1) >> k`
    - Biases dividend toward 0

Case 1: No rounding

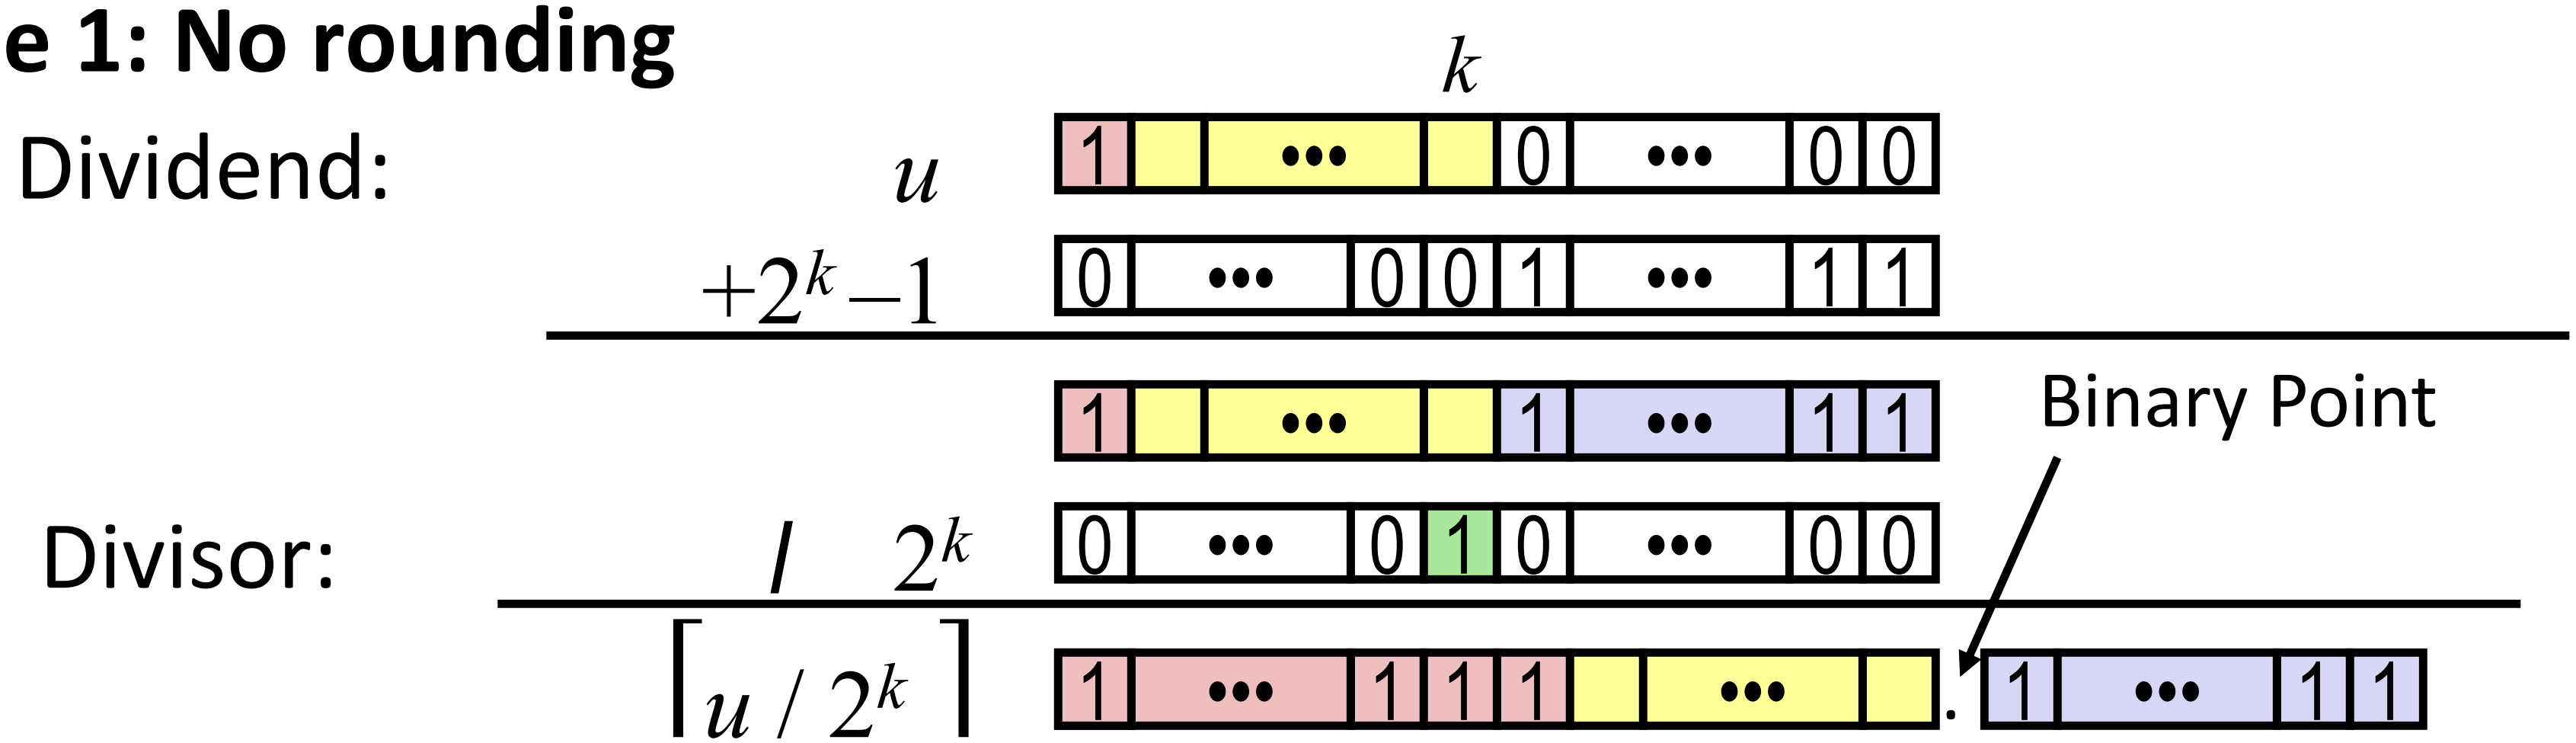

Biasing has no effect

Correct Power-of-2 Divide (Cont.)

Case 2: Rounding

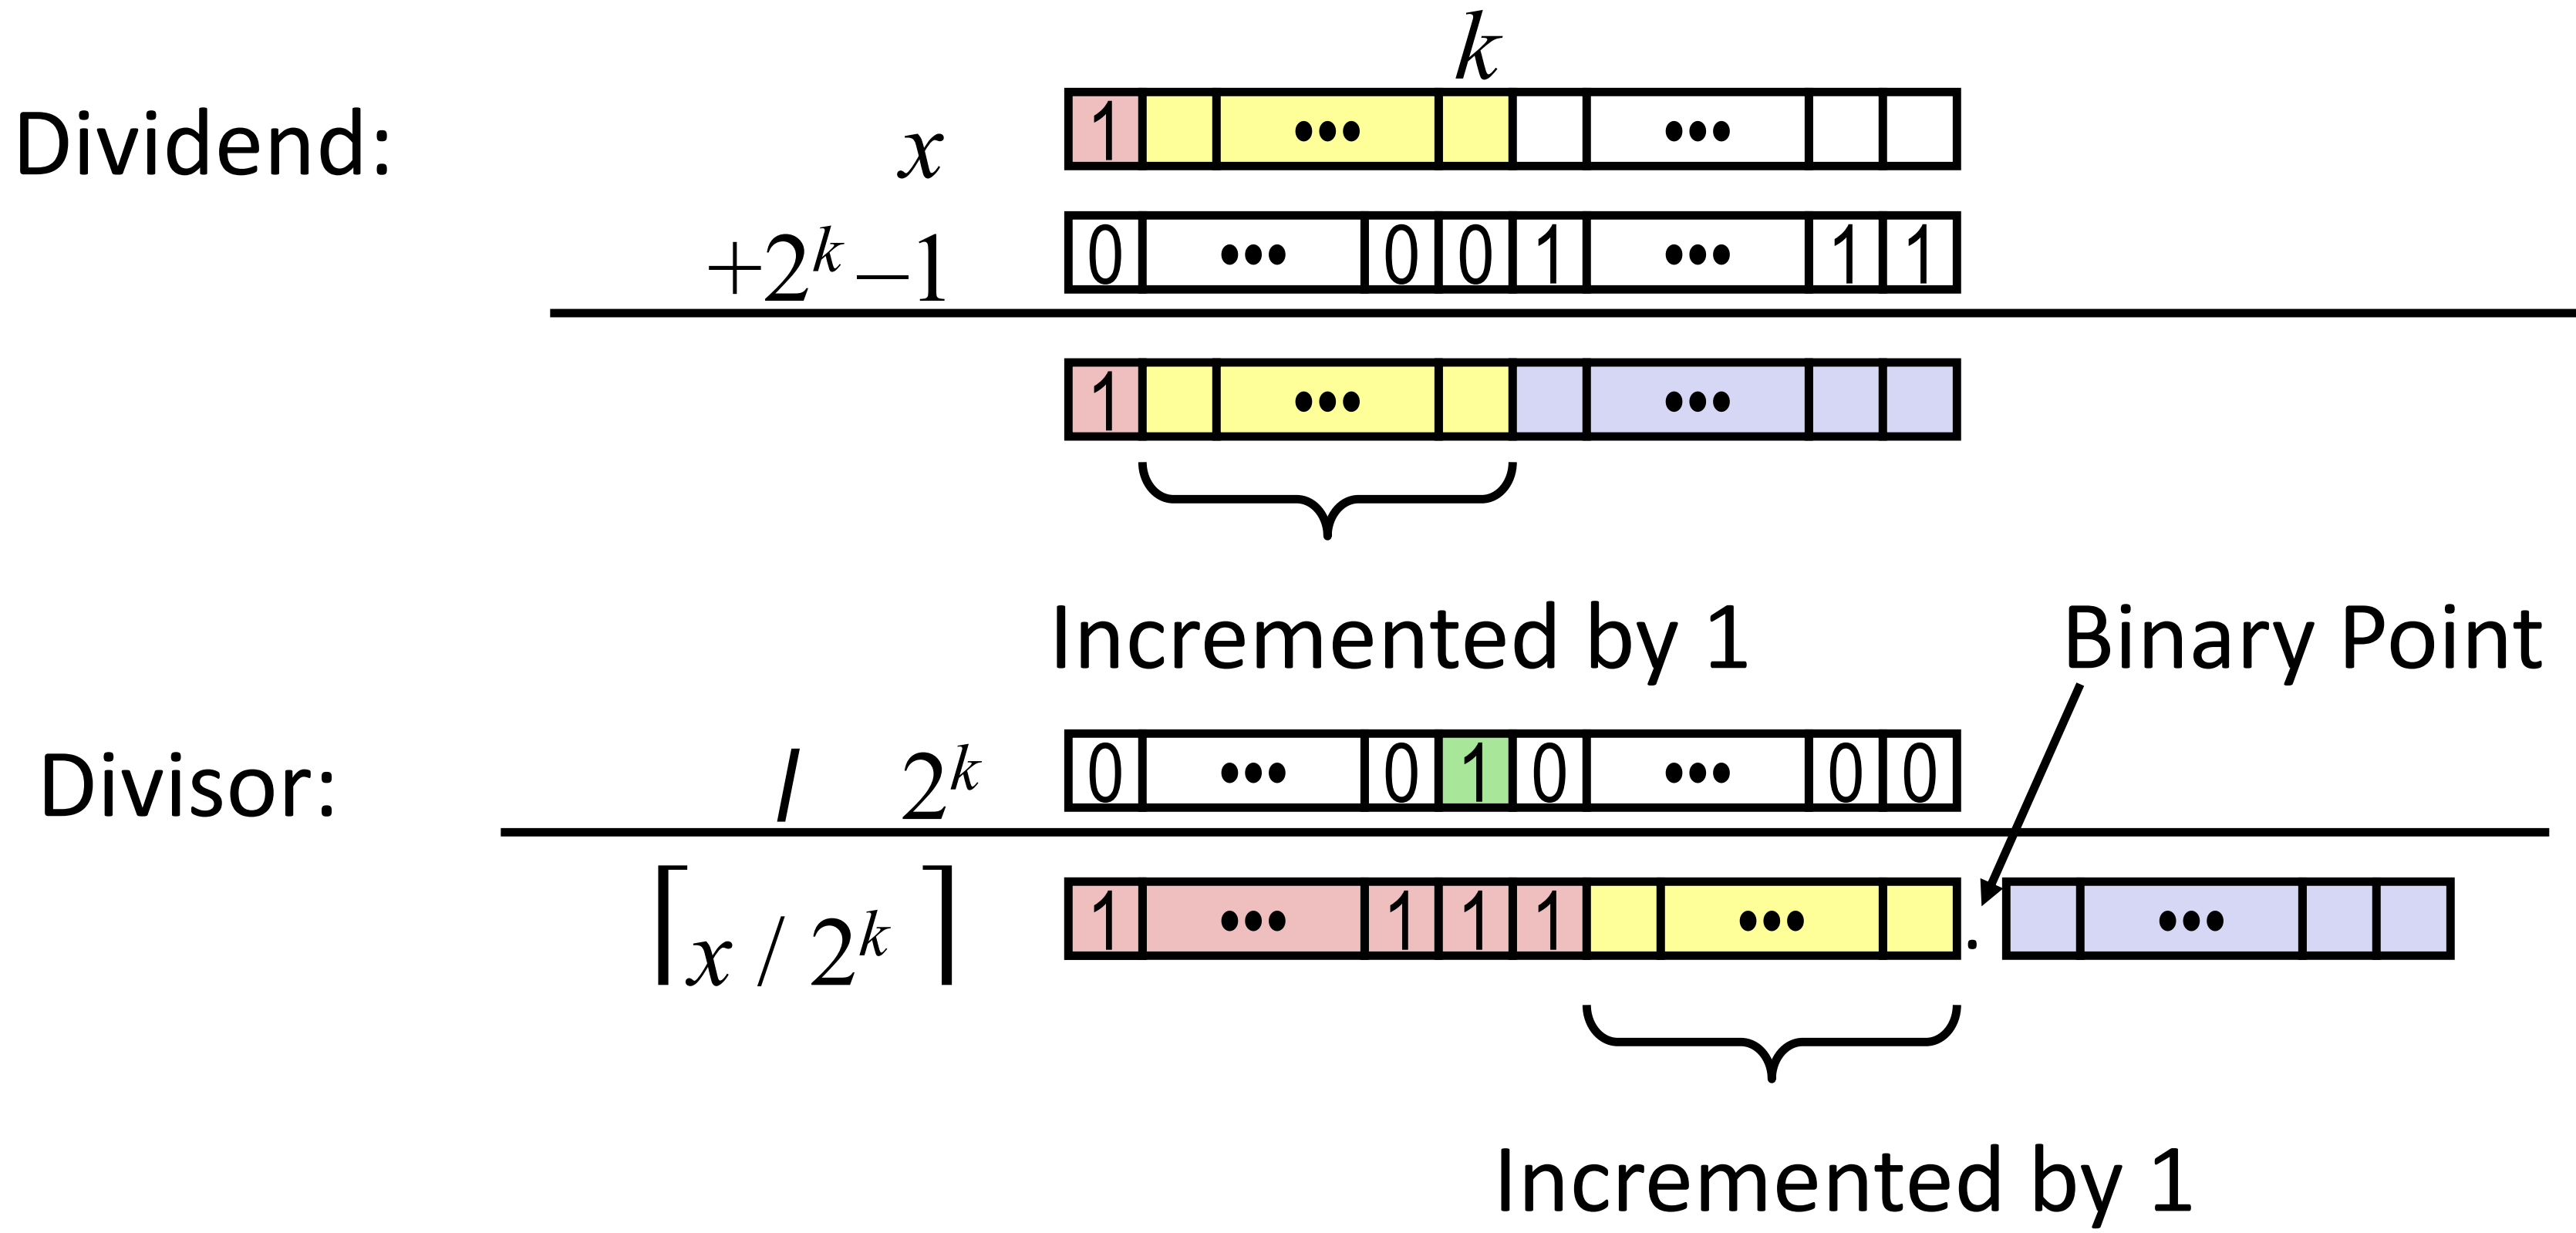

Biasing adds 1 to final result

Compiled Signed Division Code

C Function

```
int idiv8(int x)
{
  return x/8;
}
```

Compiled Arithmetic Operations

```
  testl %eax, %eax
  js    L4
L3:
  sarl $3, %eax
  ret
L4:
  addl $7, %eax
  jmp  L3
```

Explanation

```
  if x < 0
    x += 7;
  # Arithmetic shift
  return x >> 3;
```

- **Uses arithmetic shift for int**
- **For Java Users**
  - Arith. shift written as >>

Today: Integers

- Representation: unsigned and signed
- Conversion, casting
- Expanding, truncating
- Addition, negation, multiplication, shifting
- Summary