Machine-Level Programming II: Arithmetic & Control

Today

- **Complete addressing mode, address computation (leal)**
- **Arithmetic operations**
- **Control: Condition codes**
- **Conditional branches**
- **While loops**

Complete Memory Addressing Modes

- **Most General Form**
- **D(Rb,Ri,S) Mem[Reg[Rb]+S*Reg[Ri]+ D]**
  - D: Constant "displacement" 1, 2, or 4 bytes
  - Rb: Base register: Any of 8 integer registers
  - Ri: Index register: Any, except for `%esp`
    - Unlikely you'd use `%ebp`, either
  - S: Scale: 1, 2, 4, or 8 (***why these numbers?***)

- **Special Cases**
- **(Rb,Ri) Mem[Reg[Rb]+Reg[Ri]]**
- **D(Rb,Ri) Mem[Reg[Rb]+Reg[Ri]+D]**
- **(Rb,Ri,S) Mem[Reg[Rb]+S*Reg[Ri]]**

Address Computation Instruction

- **`leal` *Src,Dest***
  - *Src* is address mode expression
  - Set *Dest* to address denoted by expression

- **Uses**
  - Computing addresses without a memory reference
    - E.g., translation of **`p = &x[i];`**
  - Computing arithmetic expressions of the form x + k*y
    - k = 1, 2, 4, or 8

- **Example**

```
int mul12(int x)
{
  return x*12;
}
```

Converted to ASM by compiler:

```
leal (%eax,%eax,2), %eax  ;t <- x+x*2
sall $2, %eax             ;return t<<2
```

Today

- Complete addressing mode, address computation (leal)
- **Arithmetic operations**
- Control: Condition codes
- Conditional branches
- While loops

Some Arithmetic Operations

- **Two Operand Instructions:**

Format	*Computation*		
`addl`	*Src,Dest*	Dest = Dest + Src	
`subl`	*Src,Dest*	Dest = Dest – Src	
`imull`	*Src,Dest*	Dest = Dest * Src	
`sall`	*Src,Dest*	Dest = Dest << Src	***Also called shll***
`sarl`	*Src,Dest*	Dest = Dest >> Src	***Arithmetic***
`shrl`	*Src,Dest*	Dest = Dest >> Src	***Logical***
`xorl`	*Src,Dest*	Dest = Dest ^ Src	
`andl`	*Src,Dest*	Dest = Dest & Src	
`orl`	*Src,Dest*	Dest = Dest | Src	

- **Watch out for argument order!**
- **No distinction between signed and unsigned int (why?)**

Some Arithmetic Operations

- **One Operand Instructions**

`incl`	*Dest*	*Dest = Dest + 1*
`decl`	*Dest*	*Dest = Dest – 1*
`negl`	*Dest*	*Dest = – Dest*
`notl`	*Dest*	*Dest = ~Dest*

- **See book for more instructions**

Arithmetic Expression Example

```
int arith(int x, int y, int z)
{
  int t1 = x+y;
  int t2 = z+t1;
  int t3 = x+4;
  int t4 = y * 48;
  int t5 = t3 + t4;
  int rval = t2 * t5;
  return rval;
}
```

```
arith:
   pushl   %ebp
   movl    %esp, %ebp

   movl    8(%ebp), %ecx
   movl    12(%ebp), %edx
   leal    (%edx,%edx,2), %eax
   sall    $4, %eax
   leal    4(%ecx,%eax), %eax
   addl    %ecx, %edx
   addl    16(%ebp), %edx
   imull   %edx, %eax

   popl    %ebp
   ret
```

Set Up

Body

Finish

Today

- Complete addressing mode, address computation (leal)
- Arithmetic operations
- **Control: Condition codes**
- Conditional branches
- Loops

Processor State (IA32, Partial)

- **Information about currently executing program**
  - Temporary data (**%eax**, …)
  - Location of runtime stack (**%ebp**,**%esp**)
  - Location of current code control point (**%eip**, …)
  - Status of recent tests (**CF, ZF, SF, OF**)

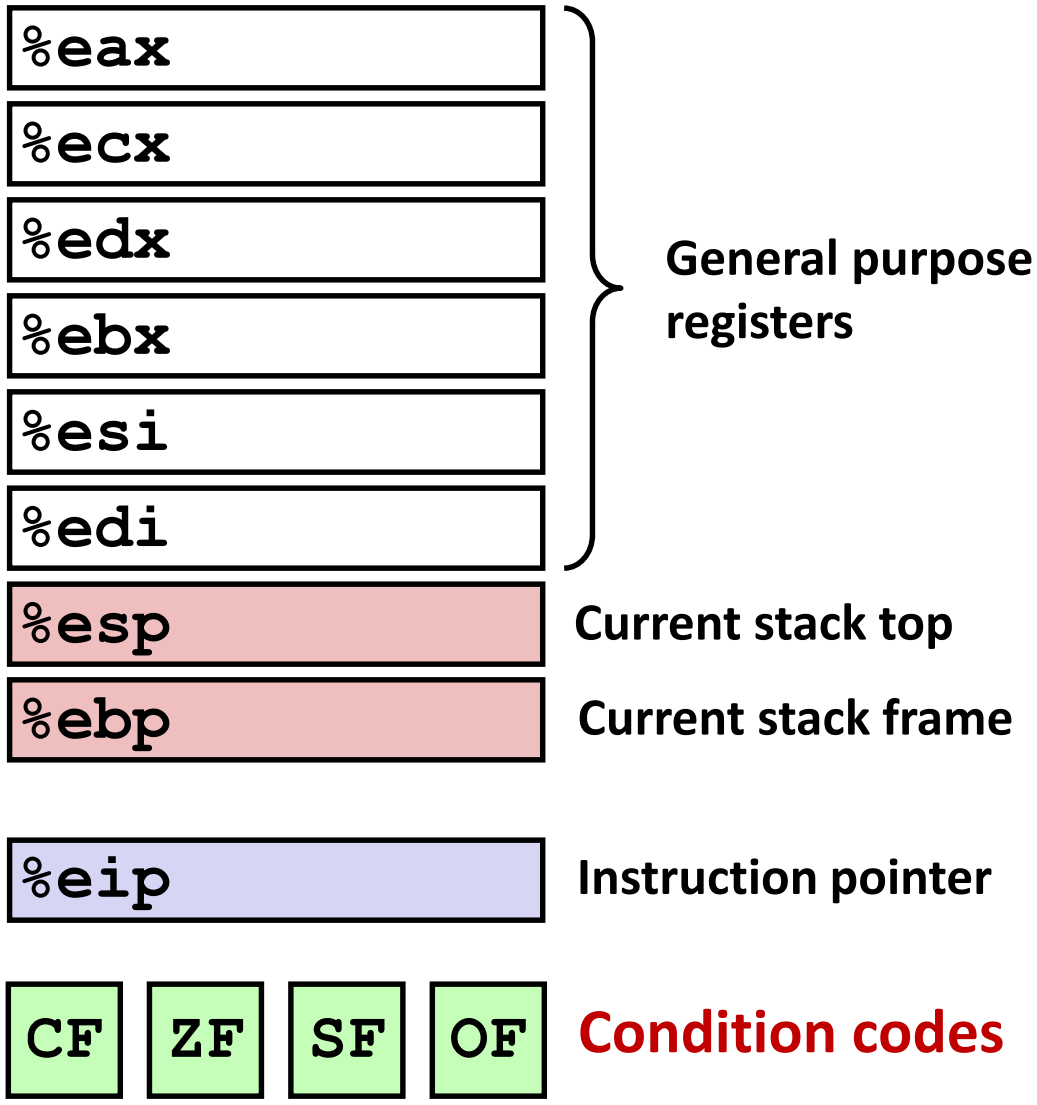

Condition Codes (Implicit Setting)

- **Single bit registers**
  - **CF** Carry Flag (for unsigned) **SF** Sign Flag (for signed)
  - **ZF** Zero Flag **OF** Overflow Flag (for signed)
- **Implicitly set (think of it as side effect) by arithmetic operations**

  Example: **`addl/addq`** *Src,Dest* ↔ **`t = a+b`**

  CF set if carry out from most significant bit (unsigned overflow)

  ZF set if **`t == 0`**

  SF set if **`t < 0`** (as signed)

  OF set if two's-complement (signed) overflow

  `(a>0 && b>0 && t<0) || (a<0 && b<0 && t>=0)`
- **Not set by `lea` instruction**
- **Full documentation (IA32), link on course website**

Condition Codes (Explicit Setting: Compare)

- **Explicit Setting by Compare Instruction**
  - **`cmpl/cmpq`** *Src2*, *Src1*
  - **`cmpl b,a`** like computing **`a-b`** without setting destination

  - **CF set** if carry out from most significant bit (used for unsigned comparisons)
  - **ZF set** if **`a == b`**
  - **SF set** if **`(a-b) < 0`** (as signed)
  - **OF set** if two's-complement (signed) overflow

```
(a>0 && b<0 && (a-b)<0) || (a<0 && b>0 && (a-b)>0)
```

Condition Codes (Explicit Setting: Test)

- **Explicit Setting by Test instruction**
  - **`testl`**/**`testq`** *Src2*, *Src1*
    `testl b,a` like computing **`a&b`** without setting destination
  - Sets condition codes based on value of *Src1* & *Src2*
  - Useful to have one of the operands be a mask
  - **ZF set** when **`a&b == 0`**
  - **SF set** when **`a&b < 0`**

Reading Condition Codes

- **SetX Instructions**
  - Set single byte based on combinations of condition codes

SetX	Condition	Description
`sete`	`ZF`	Equal / Zero
`setne`	`~ZF`	Not Equal / Not Zero
`sets`	`SF`	Negative
`setns`	`~SF`	Nonnegative
`setg`	`~(SF^OF)&~ZF`	Greater (Signed)
`setge`	`~(SF^OF)`	Greater or Equal (Signed)
`setl`	`(SF^OF)`	Less (Signed)
`setle`	`(SF^OF)|ZF`	Less or Equal (Signed)
`seta`	`~CF&~ZF`	Above (unsigned)
`setb`	`CF`	Below (unsigned)

Reading Condition Codes (Cont.)

- **SetX Instructions:**
  - Set single byte based on combination of condition codes
- **One of 8 addressable byte registers**
  - Does not alter remaining 3 bytes
  - Typically use **`movzbl`** to finish job

```
int gt (int x, int y)
{
  return x > y;
}
```

Body

```
movl 12(%ebp),%eax    # eax = y
cmpl %eax,8(%ebp)     # Compare x : y
setg %al              # al = x > y
movzbl %al,%eax       # Zero rest of %eax
```

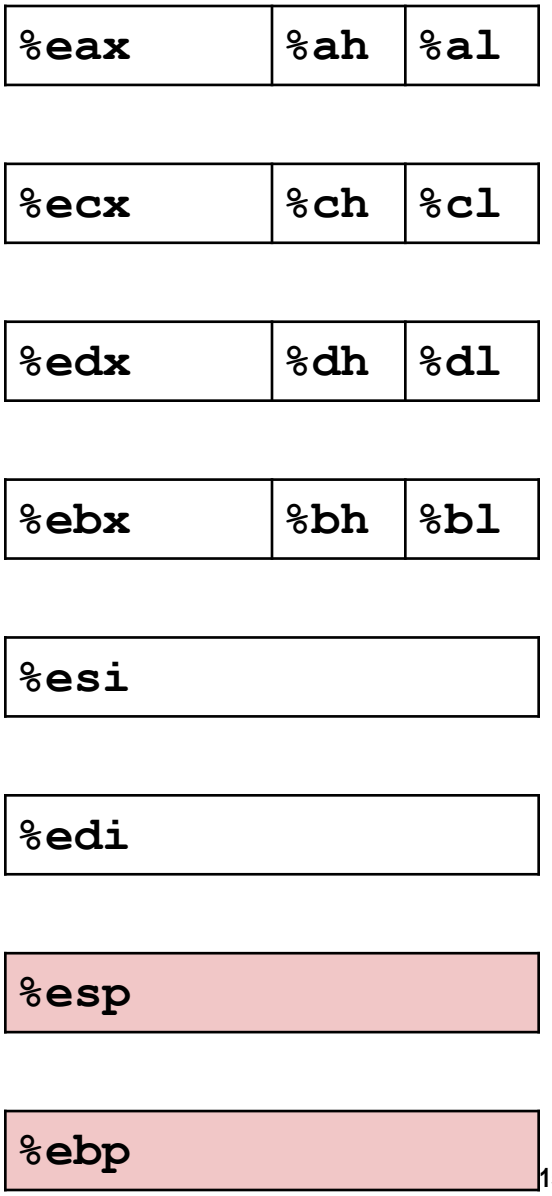

Reading Condition Codes: x86-64

- **SetX Instructions:**
  - Set single byte based on combination of condition codes
  - Does not alter remaining 3 bytes

```
int gt (long x, long y)
{
  return x > y;
}
```

```
long lgt (long x, long y)
{
  return x > y;
}
```

Bodies

```
cmpl %esi, %edi
setg %al
movzbl %al, %eax
```

```
cmpq %rsi, %rdi
setg %al
movzbl %al, %eax
```

Is `%rax` zero?

Yes: 32-bit instructions set high order 32 bits to 0!

Today

- Complete addressing mode, address computation (leal)
- Arithmetic operations
- x86-64
- Control: Condition codes
- **Conditional branches & Moves**
- Loops

Jumping

- **jX Instructions**
  - Jump to different part of code depending on condition codes

jX	Condition	Description
`jmp`	`1`	Unconditional
`je`	`ZF`	Equal / Zero
`jne`	`~ZF`	Not Equal / Not Zero
`js`	`SF`	Negative
`jns`	`~SF`	Nonnegative
`jg`	`~(SF^OF)&~ZF`	Greater (Signed)
`jge`	`~(SF^OF)`	Greater or Equal (Signed)
`jl`	`(SF^OF)`	Less (Signed)
`jle`	`(SF^OF)|ZF`	Less or Equal (Signed)
`ja`	`~CF&~ZF`	Above (unsigned)
`jb`	`CF`	Below (unsigned)

Conditional Branch Example

```
int absdiff(int x, int y)
{
    int result;
    if (x > y) {
      result = x-y;
    } else {
      result = y-x;
    }
    return result;
}
```

```
absdiff:
    pushl   %ebp
    movl    %esp, %ebp
    movl    8(%ebp), %edx
    movl    12(%ebp), %eax
    cmpl    %eax, %edx
    jle     .L6
    subl    %eax, %edx
    movl    %edx, %eax
    jmp .L7
.L6:
    subl %edx, %eax
.L7:
    popl %ebp
    ret
```

Setup

Body1

Body2a

Body2b

Finish

Conditional Branch Example (Cont.)

```
int goto_ad(int x, int y)
{
  int result;
  if (x <= y) goto Else;
  result = x-y;
  goto Exit;
Else:
  result = y-x;
Exit:
  return result;
}
```

- C allows "goto" as means of transferring control
  - Closer to machine-level programming style
- Generally considered bad coding style

```
absdiff:
    pushl   %ebp                    } Setup
    movl    %esp, %ebp              }
    movl    8(%ebp), %edx           } Body1
    movl    12(%ebp), %eax          }
    cmpl    %eax, %edx              }
    jle     .L6                     }
    subl    %eax, %edx              } Body2a
    movl    %edx, %eax              }
    jmp .L7                         }
.L6:
    subl %edx, %eax                 } Body2b
.L7:
    popl %ebp                       } Finish
    ret                             }
```

Using Conditional Moves

- **Conditional Move Instructions**
  - Instruction supports:

    if (Test) Dest ← Src
  - Supported in post-1995 x86 processors
  - GCC does not always use them
    - Wants to preserve compatibility with ancient processors
    - Enabled for x86-64
    - Use switch `-march=686` for IA32
- **Why?**
  - Branches are very disruptive to instruction flow through pipelines
  - Conditional move do not require control transfer

C Code

```
val = Test
    ? Then_Expr
    : Else_Expr;
```

Goto Version

```
  tval = Then_Expr;
  result = Else_Expr;
  t = Test;
  if (t) result = tval;
  return result;
```

Conditional Move Example: x86-64

```
int absdiff(int x, int y)  {
    int result;
    if (x > y) {
        result = x-y;
    } else {
        result = y-x;
    }
    return result;
}
```

x in %edi

y in %esi

```
absdiff:
   movl    %edi, %edx
   subl    %esi, %edx   # tval = x-y
   movl    %esi, %eax
   subl    %edi, %eax   # result = y-x
   cmpl    %esi, %edi   # Compare x:y
   cmovg   %edx, %eax   # If >, result = tval
   ret
```

Today

- Complete addressing mode, address computation (leal)
- Arithmetic operations
- x86-64
- Control: Condition codes
- Conditional branches and moves
- **Loops**

"Do-While" Loop Example

C Code

```
int pcount_do(unsigned x)
{
  int result = 0;
  do {
    result += x & 0x1;
    x >>= 1;
  } while (x);
  return result;
}
```

Goto Version

```
int pcount_do(unsigned x)
{
  int result = 0;
loop:
  result += x & 0x1;
  x >>= 1;
  if (x)
    goto loop;
  return result;
}
```

- Count number of 1's in argument x ("popcount")
- Use conditional branch to either continue looping or to exit loop

"Do-While" Loop Compilation

Goto Version

```
int pcount_do(unsigned x)  {
  int result = 0;
loop:
  result += x & 0x1;
  x >>= 1;
  if (x)
    goto loop;
  return result;
}
```

- Registers:

%edx	x
%ecx	result

```
  movl   $0, %ecx     #   result = 0
.L2:     # loop:
  movl   %edx, %eax
  andl   $1, %eax     #   t = x & 1
  addl   %eax, %ecx   #   result += t
  shrl   %edx         #   x >>= 1
  jne    .L2          #   If !0, goto loop
```

General "Do-While" Translation

C Code

```
do
   Body
   while (Test);
```

Goto Version

```
loop:
   Body
   if (Test)
      goto loop
```

- **Body:**

{
 Statement$_1$;
 Statement$_2$;
  …
 Statement$_n$;
}

- **Test returns integer**
  - = 0 interpreted as false
  - ≠ 0 interpreted as true

"While" Loop Example

C Code

```
int pcount_while(unsigned x) {
  int result = 0;
  while (x) {
    result += x & 0x1;
    x >>= 1;
  }
  return result;
}
```

Goto Version

```
int pcount_do(unsigned x) {
  int result = 0;
  if (!x) goto done;
loop:
  result += x & 0x1;
  x >>= 1;
  if (x)
    goto loop;
done:
  return result;
}
```

- Is this code equivalent to the do-while version?

General "While" Translation

While version

```
while (Test)
  Body
```



Do-While Version

```
  if (!Test)
    goto done;
  do
    Body
    while(Test);
done:
```

Goto Version

```
  if (!Test)
    goto done;
loop:
  Body
  if (Test)
    goto loop;
done:
```

“For” Loop Example

C Code

```
#define WSIZE 8*sizeof(int)
int pcount_for(unsigned x) {
  int i;
  int result = 0;
  for (i = 0; i < WSIZE; i++) {
    unsigned mask = 1 << i;
    result += (x & mask) != 0;
  }
  return result;
}
```

- Is this code equivalent to other versions?

“For” Loop Form

General Form

```
for (Init; Test; Update)
    Body
```

```
for (i = 0; i < WSIZE; i++) {
    unsigned mask = 1 << i;
    result += (x & mask) != 0;
  }
```

Init

```
i = 0
```

Test

```
i < WSIZE
```

Update

```
i++
```

Body

```
{
  unsigned mask = 1 << i;
  result += (x & mask) != 0;
}
```

“For” Loop → While Loop

For Version

```
for (Init; Test; Update)
    Body
```



While Version

```
Init;
while (Test) {
    Body
    Update;
}
```

"For" Loop → … → Goto

For Version

```
for (Init; Test; Update)
    Body
```

While Version

```
Init;
while (Test) {
    Body
    Update;
}
```

```
    Init;
    if (!Test)
        goto done;
    do
        Body
        Update
    while(Test);
done:
```

```
    Init;
    if (!Test)
        goto done;
loop:
    Body
    Update
    if (Test)
        goto loop;
done:
```

"For" Loop Conversion Example

C Code

```
#define WSIZE 8*sizeof(int)
int pcount_for(unsigned x) {
  int i;
  int result = 0;
  for (i = 0; i < WSIZE; i++) {
    unsigned mask = 1 << i;
    result += (x & mask) != 0;
  }
  return result;
}
```

- Initial test can be optimized away

Goto Version

```
int pcount_for_gt(unsigned x) {
  int i;
  int result = 0;
  i = 0;                          Init
  if (!(i < WSIZE))               !Test
    goto done;
 loop:
  {                               Body
    unsigned mask = 1 << i;
    result += (x & mask) != 0;
  }
  i++;                            Update
  if (i < WSIZE)                  Test
    goto loop;
 done:
  return result;
}
```

Summary

- **Today**
  - Complete addressing mode, address computation (leal)
  - Arithmetic operations
  - Control: Condition codes
  - Conditional branches & conditional moves
  - Loops
- **Next Time**
  - Switch statements
  - Stack
  - Call / return
  - Procedure call discipline

Machine-Level Programming III: Switch Statements and IA32 Procedures

Today

- **Switch statements**
- **IA 32 Procedures**
  - Stack Structure
  - Calling Conventions
  - Illustrations of Recursion & Pointers

```
long switch_eg
   (long x, long y, long z)
{
    long w = 1;
    switch(x) {
    case 1:
        w = y*z;
        break;
    case 2:
        w = y/z;
        /* Fall Through */
    case 3:
        w += z;
        break;
    case 5:
    case 6:
        w -= z;
        break;
    default:
        w = 2;
    }
    return w;
}
```

Switch Statement Example

- **Multiple case labels**
  - Here: 5 & 6
- **Fall through cases**
  - Here: 2
- **Missing cases**
  - Here: 4

Jump Table Structure

Switch Form

```
switch(x) {
  case val_0:
    Block 0
  case val_1:
    Block 1
    • • •
  case val_n-1:
    Block n–1
}
```

Jump Table

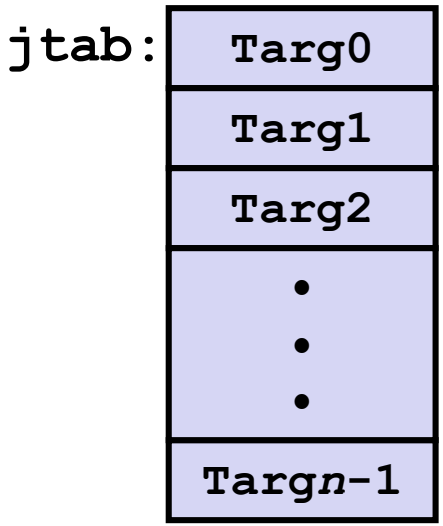

Jump Targets

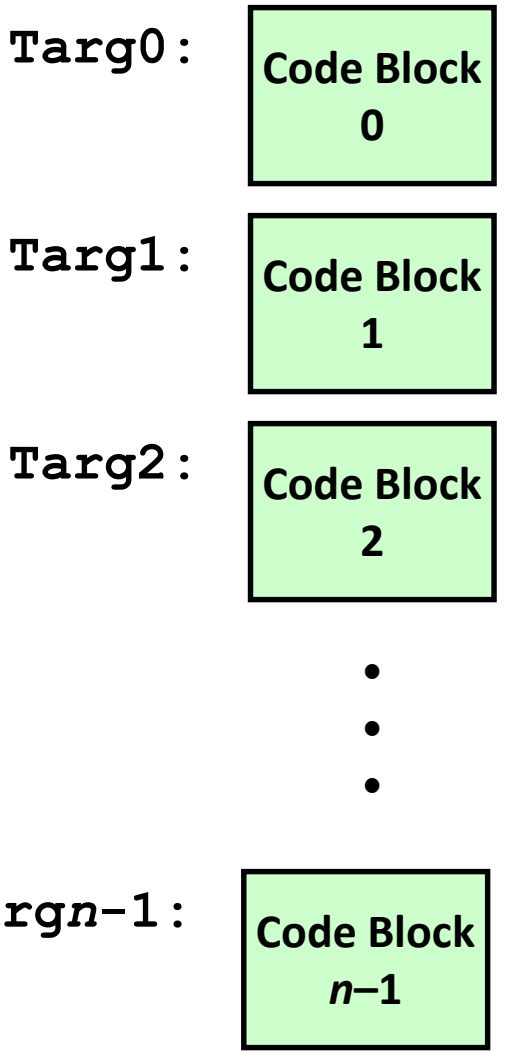

Approximate Translation

```
target = JTab[x];
goto *target;
```

Switch Statement Example (IA32)

```
long switch_eg(long x, long y, long z)
{
    long w = 1;
    switch(x) {
      . . .
    }
    return w;
}
```

Jump table

```
.section     .rodata
  .align 4
.L7:
  .long      .L2  # x = 0
  .long      .L3  # x = 1
  .long      .L4  # x = 2
  .long      .L5  # x = 3
  .long      .L2  # x = 4
  .long      .L6  # x = 5
  .long      .L6  # x = 6
```

Setup:

```
switch_eg:
   pushl   %ebp              # Setup
   movl    %esp, %ebp        # Setup
   movl    8(%ebp), %eax     # eax = x
   cmpl    $6, %eax          # Compare x:6
   ja      .L2               # If unsigned > goto default
   jmp     *.L7(,%eax,4)     # Goto *JTab[x]
```

Indirect jump

Assembly Setup Explanation

- **Table Structure**
  - Each target requires 4 bytes
  - Base address at `.L7`

Jump table

```
.section   .rodata
  .align 4
.L7:
  .long    .L2 # x = 0
  .long    .L3 # x = 1
  .long    .L4 # x = 2
  .long    .L5 # x = 3
  .long    .L2 # x = 4
  .long    .L6 # x = 5
  .long    .L6 # x = 6
```

- **Jumping**
  - **Direct:** `jmp .L2`
  - Jump target is denoted by label `.L2`
  - **Indirect:** `jmp *.L7(,%eax,4)`
  - Start of jump table: `.L7`
  - Must scale by factor of 4 (labels have 32-bits = 4 Bytes on IA32)
  - Fetch target from effective Address `.L7 + eax*4`
    - Only for $0 \le x \le 6$

x86-64 Switch Implementation

- Same general idea, adapted to 64-bit code
- Table entries 64 bits (pointers)
- Cases use revised code

```
    switch(x) {
    case 1:       // .L3
        w = y*z;
        break;
      . . .
    }
```

```
.L3:
   movq     %rdx, %rax
   imulq    %rsi, %rax
   ret
```

Jump Table

```
  .section  .rodata
  .align 8
.L7:
  .quad     .L2     # x = 0
  .quad     .L3     # x = 1
  .quad     .L4     # x = 2
  .quad     .L5     # x = 3
  .quad     .L2     # x = 4
  .quad     .L6     # X = 5
  .quad     .L6     # x = 6
```

IA32 Object Code

- **Setup**
  - Label `.L2` becomes address `0x8048422`
  - Label `.L7` becomes address `0x8048660`

Assembly Code

```
switch_eg:
  . . .
   ja      .L2             # If unsigned > goto default
   jmp     *.L7(,%eax,4)   # Goto *JTab[x]
```

Disassembled Object Code

```
08048410 <switch_eg>:
 . . .
 8048419: 77 07          ja     8048422 <switch_eg+0x12>
 804841b: ff 24 85 60 86 04 08  jmp    *0x8048660(,%eax,4)
```

Summarizing

- **C Control**
  - if-then-else
  - do-while
  - while, for
  - switch
- **Assembler Control**
  - Conditional jump
  - Conditional move
  - Indirect jump
  - Compiler generates code sequence to implement more complex control
- **Standard Techniques**
  - Loops converted to do-while form
  - Large switch statements use jump tables
  - Sparse switch statements may use decision trees

Today

- Switch statements
- **IA 32 Procedures**
  - Stack Structure
  - Calling Conventions
  - Illustrations of Recursion & Pointers

IA32 Stack

- Region of memory managed with stack discipline
- Grows toward lower addresses

- Register `%esp` contains lowest stack address
  - address of "top" element

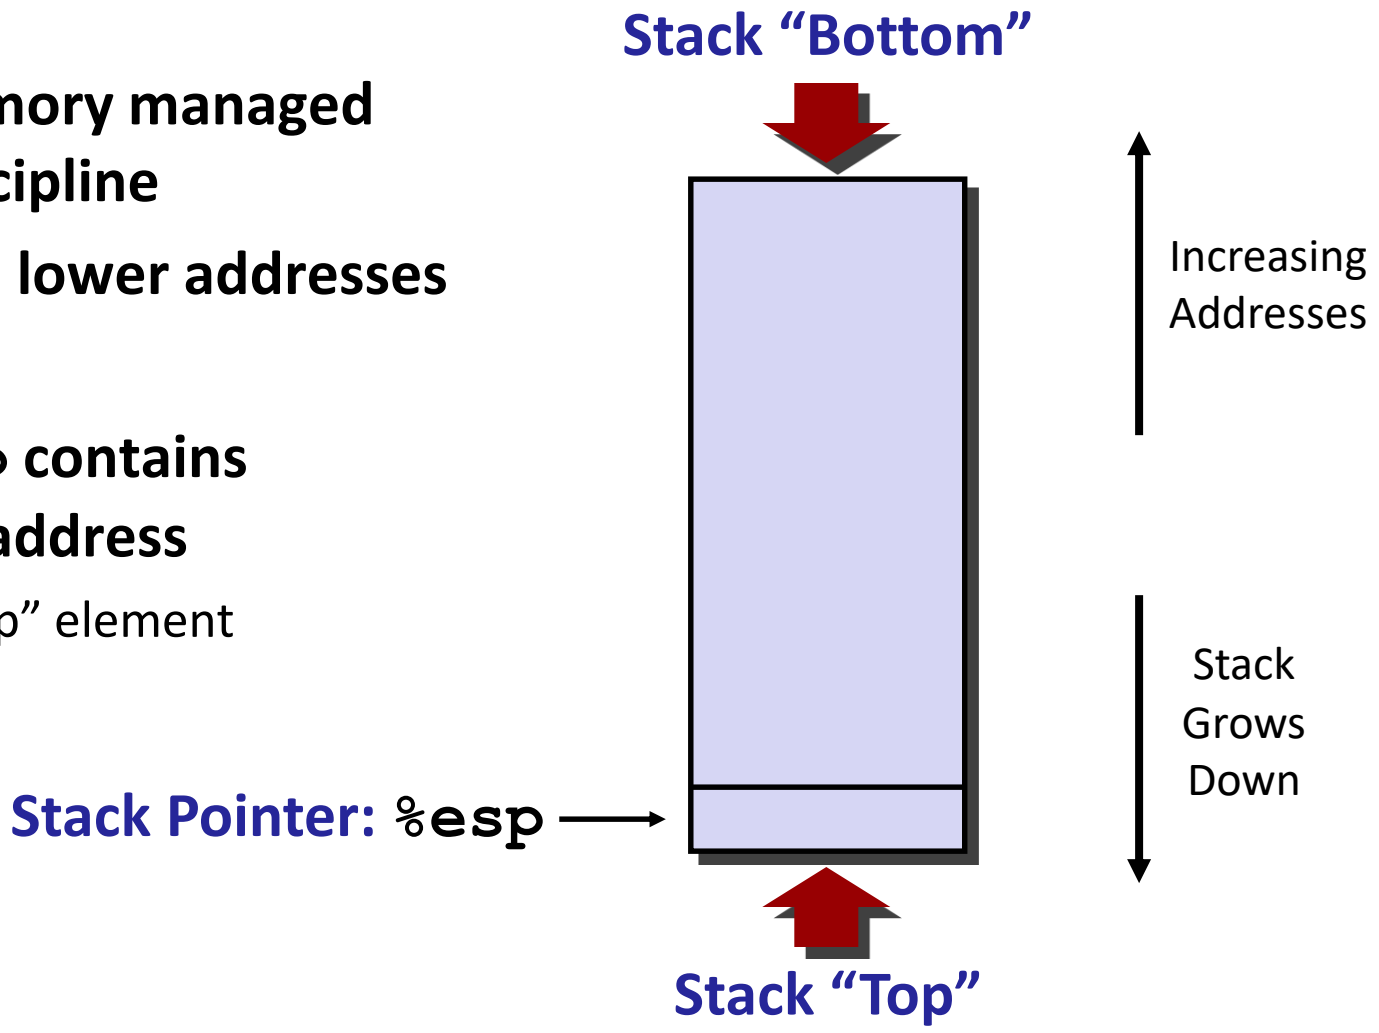

IA32 Stack

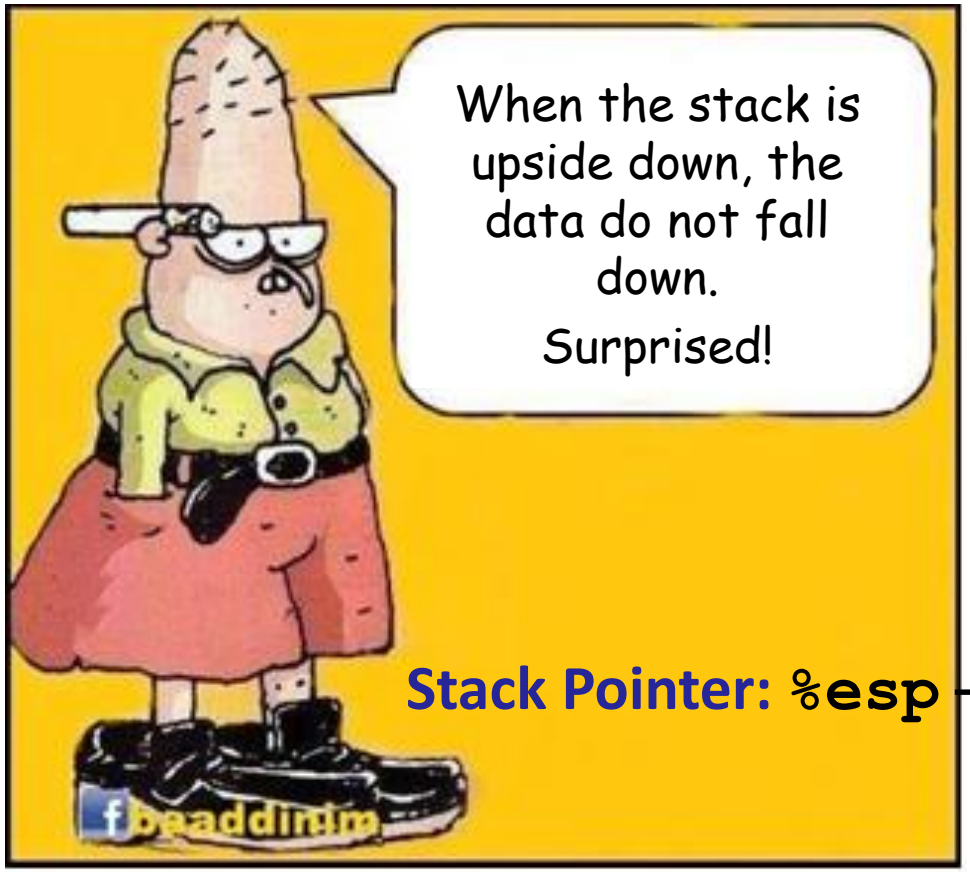

Stack "Bottom"

Stack Pointer: `%esp`

Stack "Top"

Increasing Addresses

Stack Grows Down

IA32 Stack: Push

- **`pushl` *Src***
  - Fetch operand at *Src*
  - Decrement **`%esp`** by 4
  - Write operand at address given by **`%esp`**

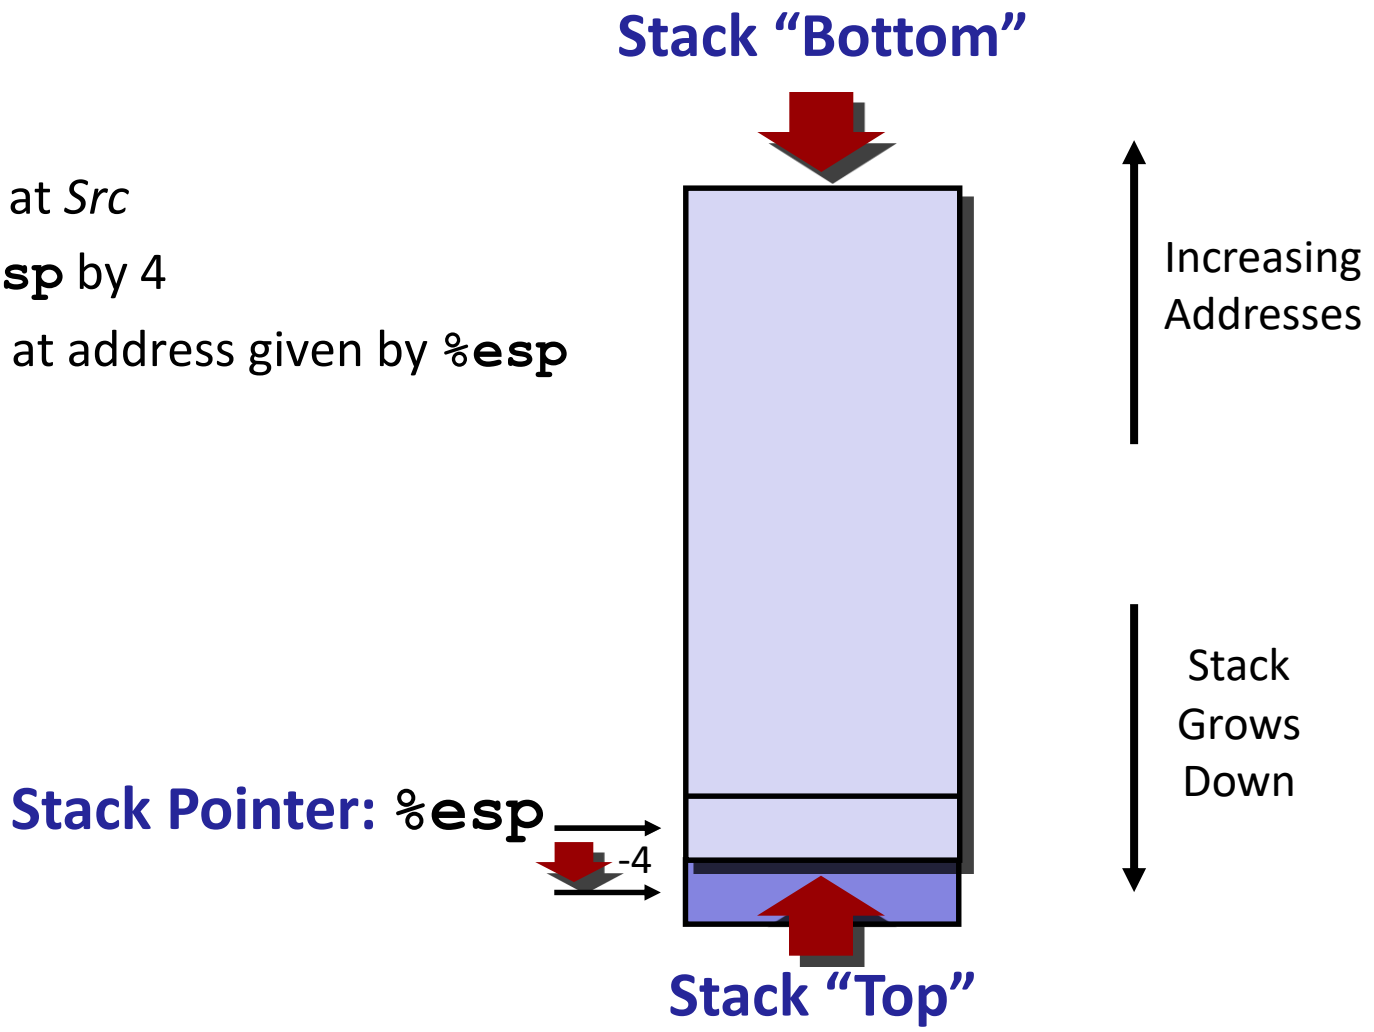

IA32 Stack: Pop

- **`popl`** *Dest*
  - Read operand at address `%esp`
  - Increment `%esp` by 4
  - Write operand to *Dest*

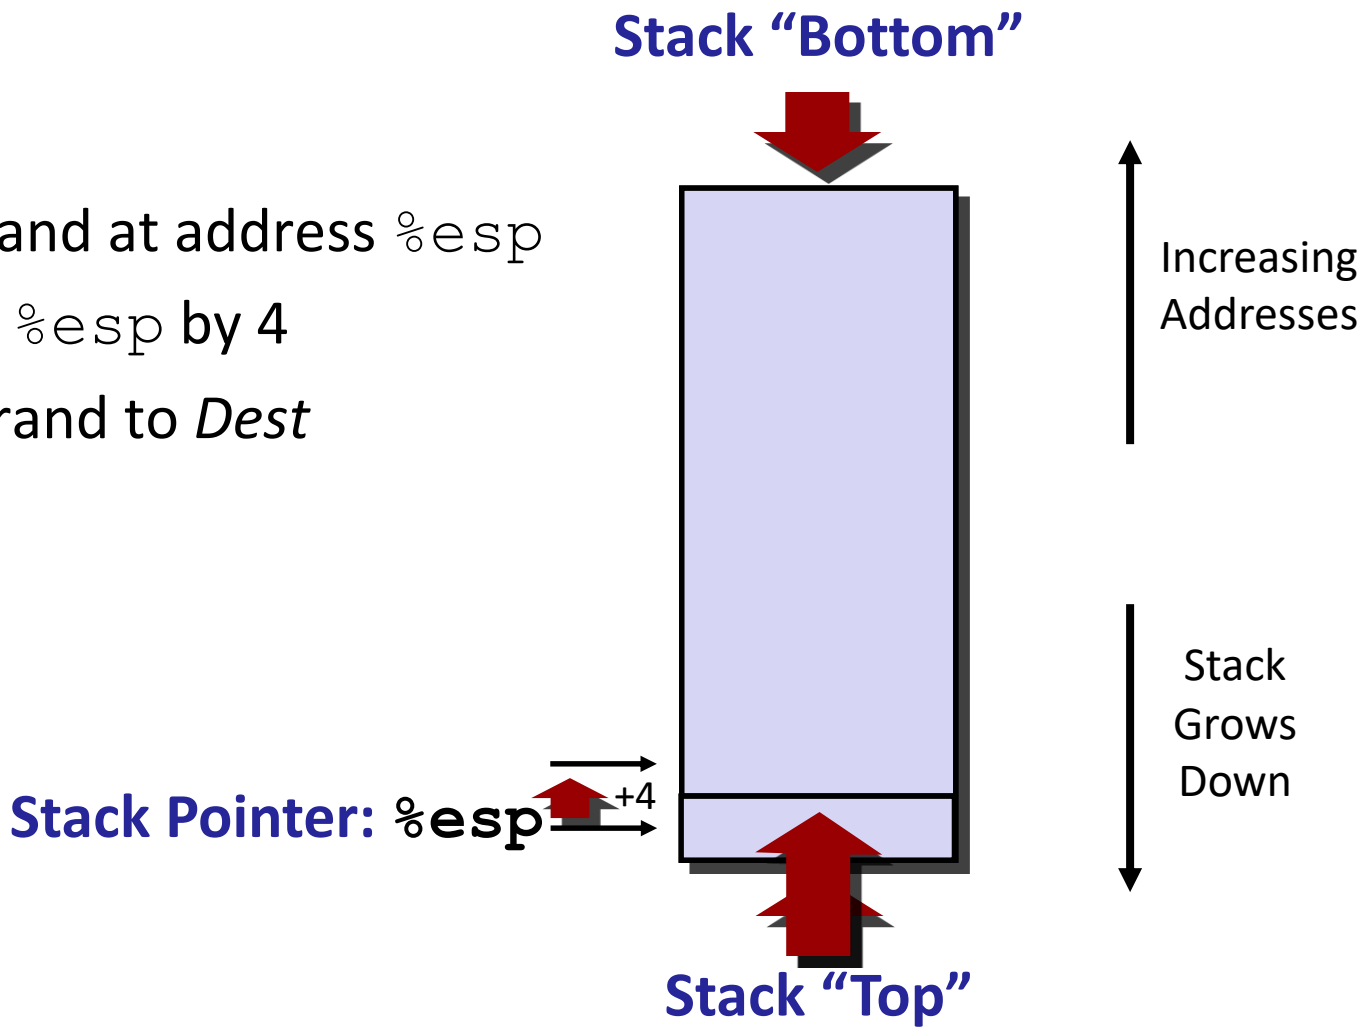

Procedure Control Flow

- **Use stack to support procedure call and return**
- **Procedure call: `call label`**
  - Push return address on stack
  - Jump to ***label***
- **Return address:**
  - Address of the next instruction right after call
  - Example from disassembly

```
804854e:  e8 3d 06 00 00     call   8048b90 <main>
8048553:  50                 pushl  %eax
```

  - Return address = `0x8048553`
- **Procedure return: `ret`**
  - Pop address from stack
  - Jump to address

Procedure Call Example

```
804854e:    e8 3d 06 00 00        call   8048b90 <main>
8048553:    50                    pushl  %eax
```

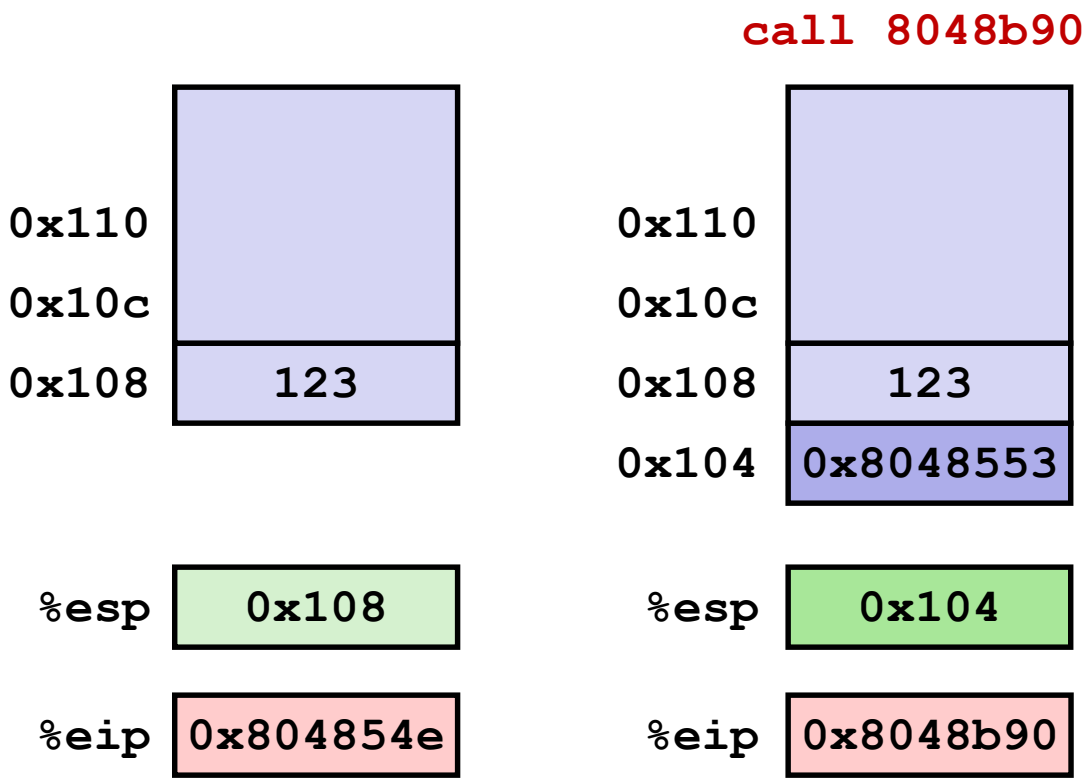

%eip: program counter

Procedure Return Example

```
8048591:    c3                  ret
```

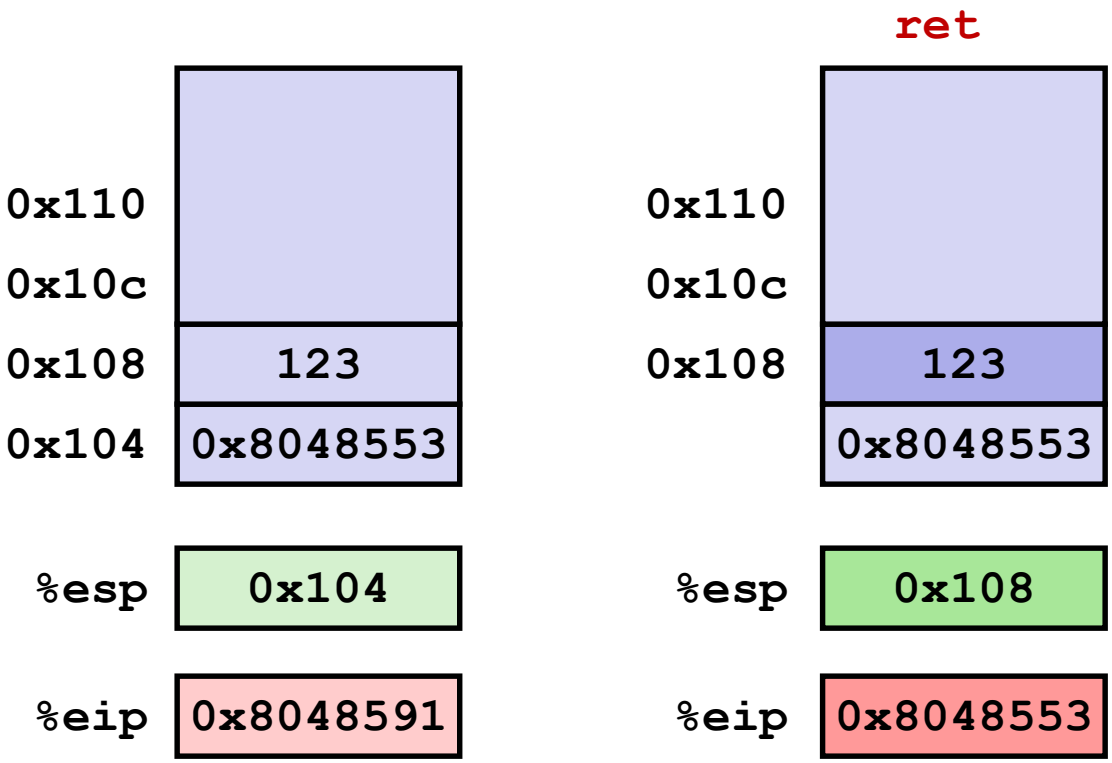

%eip: program counter

Stack-Based Languages

- **Languages that support recursion**
  - e.g., C, Pascal, Java
  - Code must be "*Reentrant*"
    - Multiple simultaneous instantiations of single procedure
  - Need some place to store state of each instantiation
    - Arguments
    - Local variables
    - Return pointer
- **Stack discipline**
  - State for given procedure needed for limited time
    - From when called to when return
  - Callee returns before caller does
- **Stack allocated in *Frames***
  - state for single procedure instantiation

Stack Frames

- **Contents**
  - Local variables
  - Return information
  - Temporary space

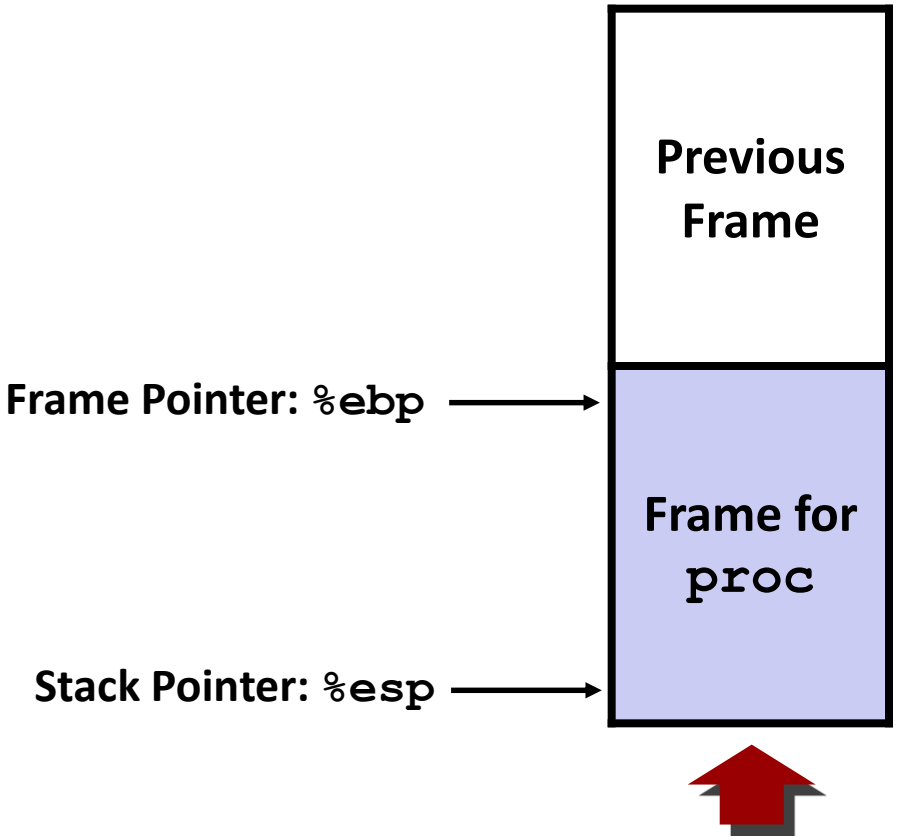

- **Management**
  - Space allocated when enter procedure
    - "Set-up" code
  - Deallocated when return
    - "Finish" code

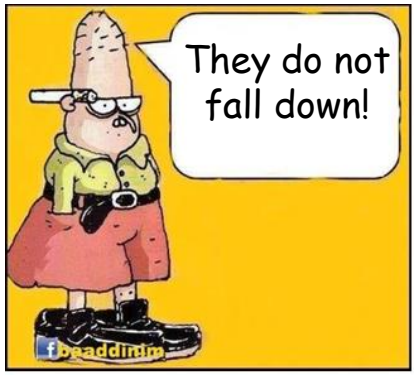

IA32/Linux Stack Frame

- **Current Stack Frame ("Top" to Bottom)**
  - "Argument build:"
    Parameters for function about to call
  - Local variables
    If can't keep in registers
  - Saved register context
  - Old frame pointer

- **Caller Stack Frame**
  - Return address
    - Pushed by `call` instruction
  - Arguments for this call

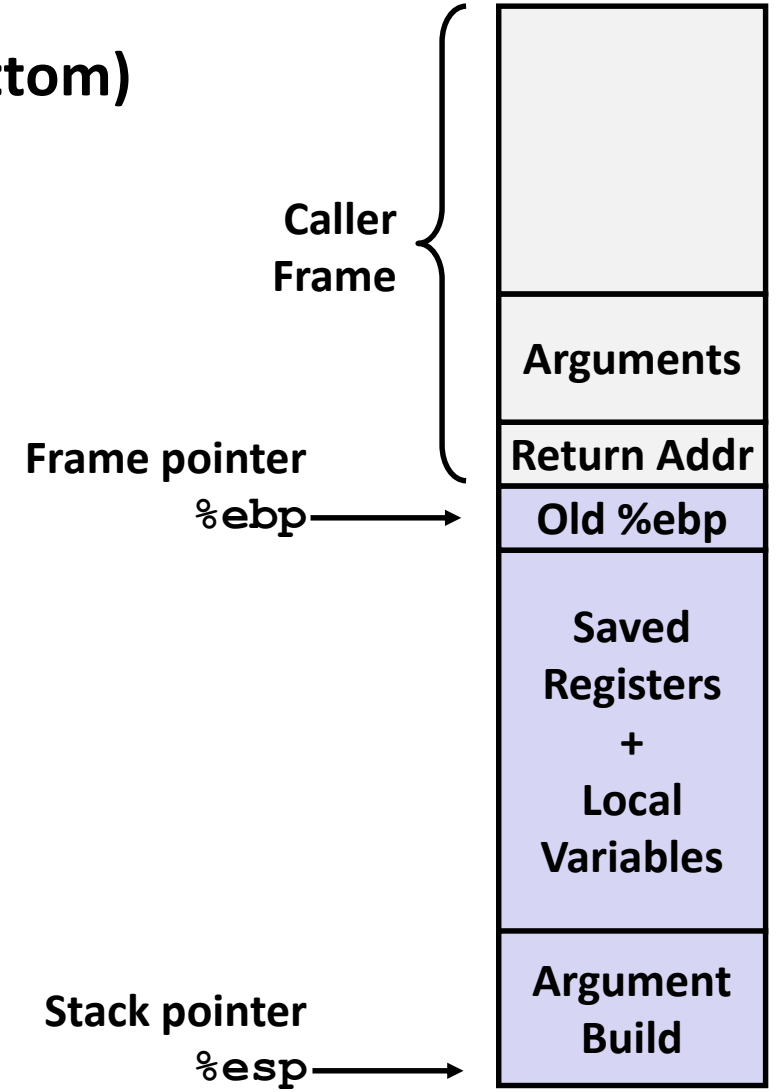

Today

- Switch statements
- **IA 32 Procedures**
  - Stack Structure
  - Calling Conventions
  - Illustrations of Recursion & Pointers

IA32/Linux+Windows Register Usage

- **`%eax`, `%edx`, `%ecx`**
  - Caller saves prior to call if values are used later
- **`%eax`**
  - also used to return integer value
- **`%ebx`, `%esi`, `%edi`**
  - Callee saves if wants to use them
- **`%esp`, `%ebp`**
  - special form of callee save
  - Restored to original values upon exit from procedure

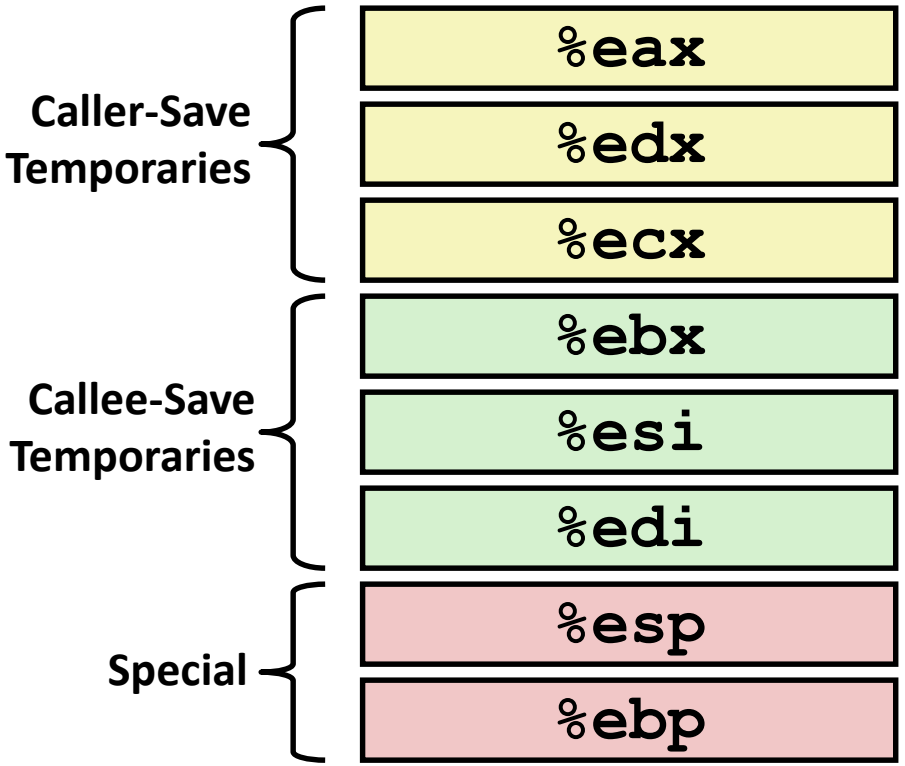

Today

- Switch statements
- **IA 32 Procedures**
  - Stack Structure
  - Calling Conventions
  - Illustrations of Recursion & Pointers

Recursive Function

```
/* Recursive popcount */
int pcount_r(unsigned x) {
  if (x == 0)
    return 0;
  else return
    (x & 1) + pcount_r(x >> 1);
}
```

- **Registers**
  - `%eax`, `%edx` used without first saving
  - `%ebx` used, but saved at beginning & restored at end

```
pcount_r:
    pushl  %ebp
    movl   %esp, %ebp
    pushl  %ebx
    subl   $4, %esp
    movl   8(%ebp), %ebx
    movl   $0, %eax
    testl  %eax, %ebx
    je   .L3
    movl %ebx, %eax
    shrl %eax
    movl %eax, (%esp)
    call pcount_r
    movl %ebx, %edx
    andl $1, %edx
    leal(%edx,%eax), %eax
.L3:
    addl$4, %esp
    popl %ebx
    popl %ebp
    ret
```

Recursive Call #1

```
/* Recursive popcount */
int pcount_r(unsigned x) {
  if (x == 0)
    return 0;
  else return
    (x & 1) + pcount_r(x >> 1);
}
```

```
pcount_r:
    pushl %ebp
    movl  %esp, %ebp
    pushl  %ebx
    subl   $4, %esp
    movl 8(%ebp), %ebx
     • • •
```

- **Actions**
  - Save old value of **%ebx** on stack
  - Allocate space for argument to recursive call
  - Store x in **%ebx**



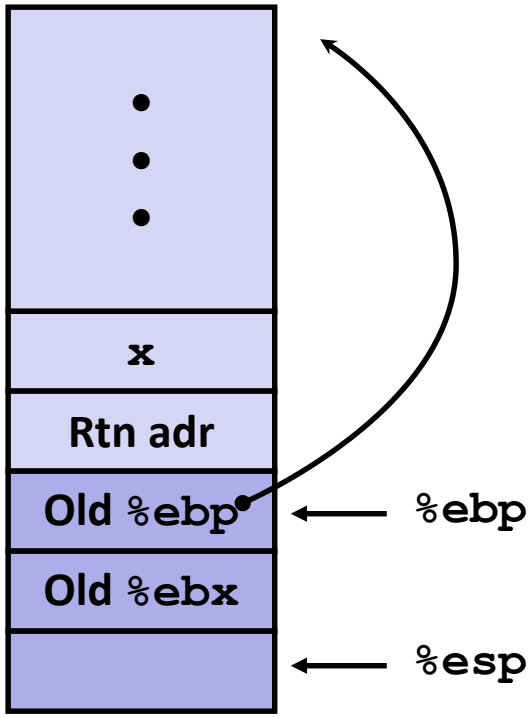

Observations About Recursion

- **Handled Without Special Consideration**
  - Stack frames mean that each function call has private storage
    - Saved registers & local variables
    - Saved return pointer
  - Register saving conventions prevent one function call from corrupting another's data
  - Stack discipline follows call / return pattern
    - If P calls Q, then Q returns before P
    - Last-In, First-Out
- **Also works for mutual recursion**
  - P calls Q; Q calls P

Pointer Code

Generating Pointer

```
/* Compute x + 3 */
int add3(int x) {
  int localx = x;
  incrk(&localx, 3);
  return localx;
}
```

Referencing Pointer

```
/* Increment value by k */
void incrk(int *ip, int k) {
  *ip += k;
}
```

- add3 creates pointer and passes it to `incrk`

Creating and Initializing Local Variable

```
int add3(int x) {
  int localx = x;
  incrk(&localx, 3);
  return localx;
}
```

- Variable localx must be stored on stack
  - Because: Need to create pointer to it
- Compute pointer as -4(%ebp)

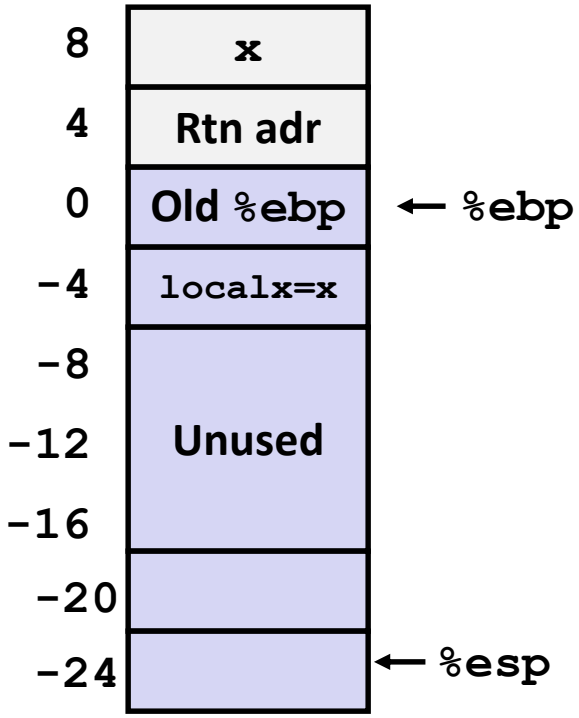

First part of add3

```
add3:
   pushl%ebp
   movl %esp, %ebp
   subl $24, %esp     # Alloc. 24 bytes
   movl 8(%ebp), %eax
   movl %eax, -4(%ebp)# Set localx to x
```

Creating Pointer as Argument

```
int add3(int x) {
  int localx = x;
  incrk(&localx, 3);
  return localx;
}
```

- Use leal instruction to compute address of localx

Middle part of add3

```
  movl $3, 4(%esp)   # 2nd arg = 3
  leal -4(%ebp), %eax# &localx
  movl %eax, (%esp)  # 1st arg = &localx
  call incrk
```

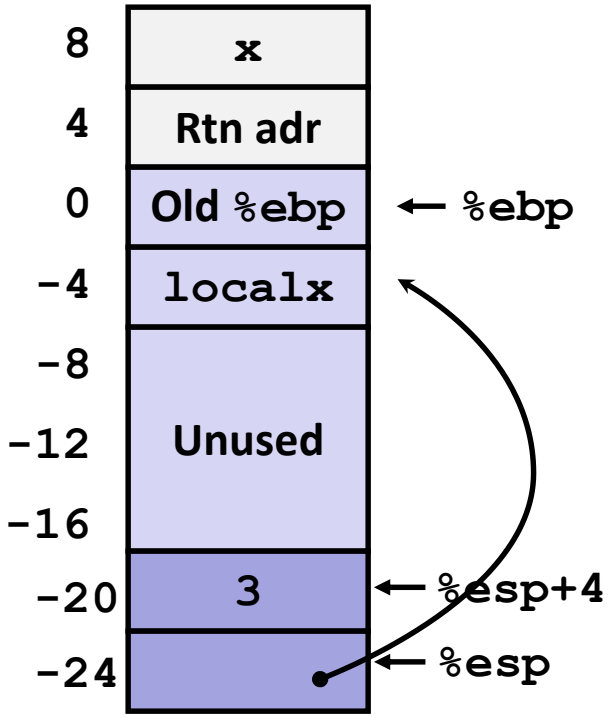

Retrieving local variable

```
int add3(int x) {
  int localx = x;
  incrk(&localx, 3);
  return localx;
}
```

- Retrieve localx from stack as return value

Final part of add3

```
movl -4(%ebp), %eax # Return val= localx
leave
ret
```

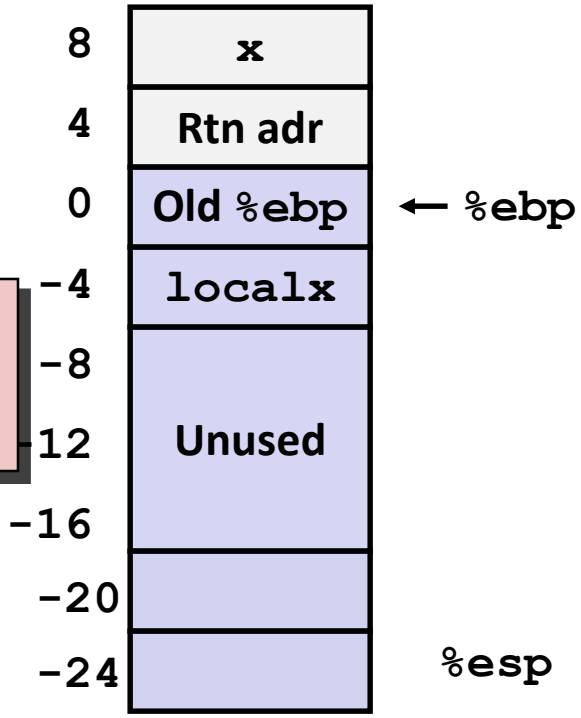

IA 32 Procedure Summary

- **Important Points**
  - Stack is the right data structure for procedure call / return
    - If P calls Q, then Q returns before P
- **Recursion (& mutual recursion) handled by normal calling conventions**
  - Can safely store values in local stack frame and in callee-saved registers
  - Put function arguments at top of stack
  - Result return in **`%eax`**
- **`Pointers are addresses of values`**
  - **`On stack or global`**