

CHE 565 -- Homework 5

Soki Sem

April 30, 2026

Introduction

This homework was completed using Python with the Control Systems Library. The report uses the same block-diagram logic as the Simulink assignment, but the systems are constructed programmatically using transfer functions, state-space conversions, and `ct.interconnect`.

The cascade-control problems compare the response with and without the inner feedback loop. The first controller is treated as an ideal PI controller, while the inner controller is P-only. For the no-cascade case, the inner feedback is disconnected and the inner controller gain is set to 1.

$$G_{c,1}(s) = K_{c,1} \left(1 + \frac{1}{\tau_{I,1}s} \right)$$

$$G_{c,2}(s) = K_{c,2}$$

$$IAE = \int_0^T |r(t) - y(t)| dt$$

```
1 # P-only, but represented as a transfer function so ct.ss() works.
2 return ct.tf([Kc], [1])
3
4 Gc2 = p_only_controller(Kc2)
5 Gc2_blk = ct.ss(Gc2, name='Gc2', inputs='E2', outputs='Yc2')%
```

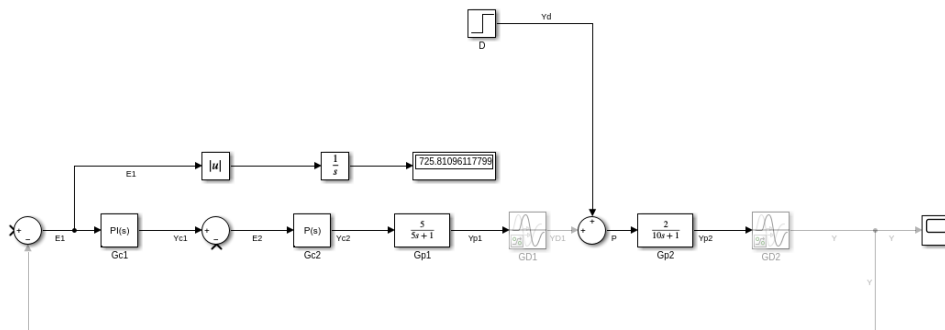


Figure 1: Simulink block diagram for the cascade-control system.

Problems 1--3: Cascade Control

Problem 1: System Without Cascade Control

For the no-cascade case, the inner feedback path was disconnected and the P-only inner controller gain was set to $K_{c,2} = 1$. The outer PI controller was then tuned by minimizing the IAE.

$$K_{c,1} = 3604932548414123070440737630846976.0000, \quad \tau_{I,1} = 207034715.1867, \quad I_1 = 0.0000$$

Case	$K_{c,1}$	$\tau_{I,1}$	IAE
Disturbance	3604932548414123070440737630846976.0000	207034715.1867	0.0000
Setpoint	3604932548414123070440737630846976.0000	207034715.1867	154.8202

Table 1: Problem 1 results without cascade control.

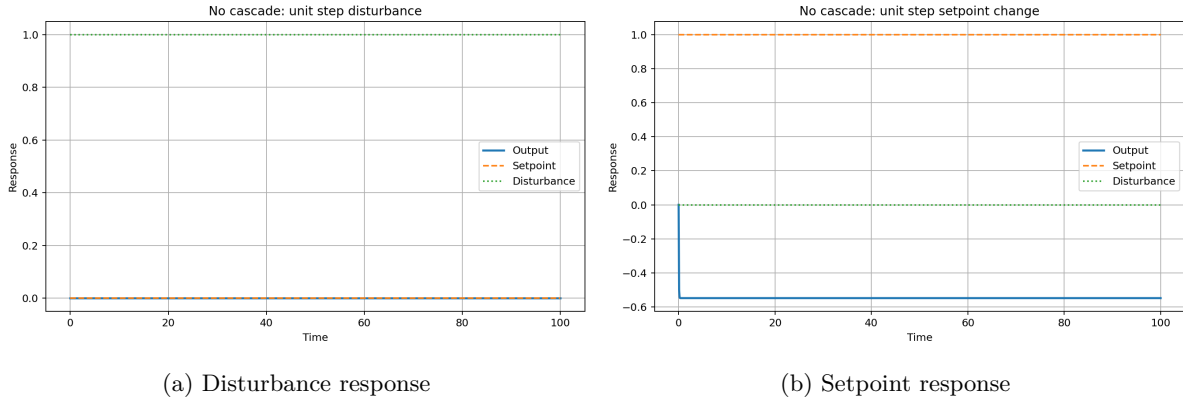


Figure 2: Problem 1 responses without cascade control.

Problem 2: System With Cascade Control

For the cascade case, the inner feedback path was connected and the inner P-only controller gain was set to $K_{c,2} = 0.4$. The outer controller was tuned again because the outer loop sees a different equivalent process.

$$K_{c,1} = 50365186339204098824734525882368.0000, \quad \tau_{I,1} = 1883000003466100998144.0000, \quad I_1 = 0.0000$$

Case	$K_{c,2}$	$K_{c,1}$	$\tau_{I,1}$	IAE
Disturbance	0.4000	50365186339204098824734525882368.0000	1883000003466100998144.0000	0.0000
Setpoint	0.4000	50365186339204098824734525882368.0000	1883000003466100998144.0000	11.7938

Table 2: Problem 2 results with cascade control.

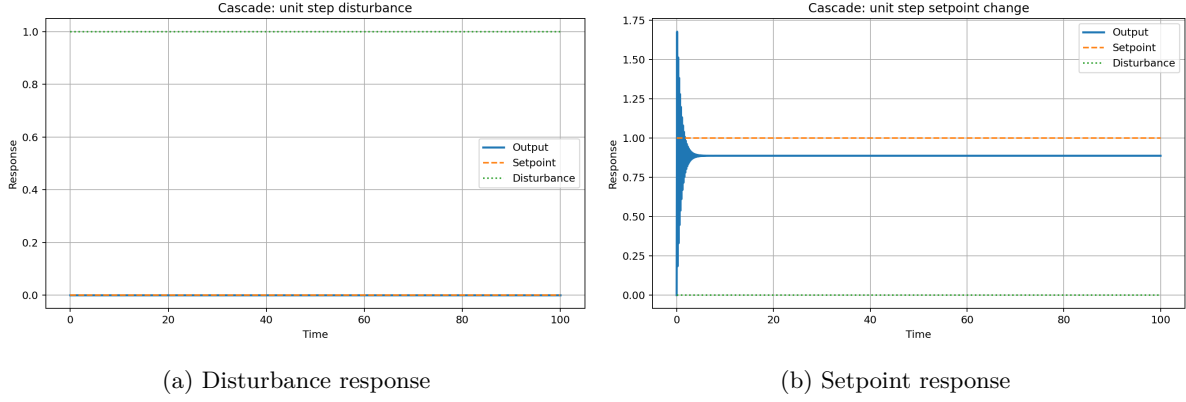


Figure 3: Problem 2 responses with cascade control.

Problem 3: Comparison of Cascade and No-Cascade Results

Test	No Cascade IAE	Cascade IAE	Change
Disturbance	0.0000	0.0000	0.0000
Setpoint	154.8202	11.7938	-143.0264

Table 3: Comparison of no-cascade and cascade-control performance.

Cascade control is expected to make the largest difference for disturbance rejection. The disturbance enters at the intermediate process variable, so the inner loop can react before the effect fully propagates to the final output. For setpoint tracking, cascade control may still change the response, but the benefit is usually less direct because the setpoint must pass through both the outer and inner loops.

Problem 4: Relative Gain Array for the 4 by 4 Process

$$\Lambda = K \circ (K^{-1})^T$$

$$K = \begin{bmatrix} 0.4300 & 0.4300 & 0.2300 & 0.2200 \\ -0.3300 & 0.3200 & -0.2000 & 0.2000 \\ 0.2200 & 0.2300 & 0.4200 & 0.4100 \\ -0.2200 & 0.2200 & -0.3200 & 0.3200 \end{bmatrix}$$

$$\Lambda = \begin{bmatrix} 0.6795 & 0.7167 & -0.1958 & -0.2004 \\ 0.8768 & 0.8566 & -0.3548 & -0.3786 \\ -0.1885 & -0.2078 & 0.6999 & 0.6964 \\ -0.3678 & -0.3654 & 0.8507 & 0.8826 \end{bmatrix}$$

y_i	u_1	u_2	u_3	u_4
y1	0.6795	0.7167	-0.1958	-0.2004
y2	0.8768	0.8566	-0.3548	-0.3786
y3	-0.1885	-0.2078	0.6999	0.6964
y4	-0.3678	-0.3654	0.8507	0.8826

Table 4: Relative gain array for Problem 4.

Output	Manipulated Variable	λ_{ij}
y1	u2	0.7167
y2	u4	-0.3786
y3	u1	-0.1885
y4	u3	0.8507

Table 5: Suggested pairings for Problem 4.

The suggested pairings are chosen from positive RGA values that are relatively close to one while avoiding negative pairings. Negative relative gains are avoided because they indicate that closing other loops can reverse the apparent gain direction.

Problem 5: Relative Gain Array for the 2 by 2 Process

$$K = \begin{bmatrix} 5 & 2 \\ 3 & 6 \end{bmatrix}$$

$$\Lambda = \begin{bmatrix} 1.2500 & -0.2500 \\ -0.2500 & 1.2500 \end{bmatrix}$$

y_i	u_1	u_2
y1	1.2500	-0.2500
y2	-0.2500	1.2500

Table 6: Relative gain array for Problem 5.

The diagonal pairings are preferred because the diagonal RGA values are positive and greater than one, while the off-diagonal values are negative. Therefore, the best pairing is y1 with u1 and y2 with u2.

Problems 6--10: MIMO Control, Cross Terms, and Decoupling

Problem 6: Two Single-Loop Controllers with Cross Terms Neglected

$$K_c = \frac{\tau_p}{K_p(\lambda + \theta)}, \quad \tau_I = \tau_p$$

Loop	K_p	τ_p	θ	λ	K_c	τ_I
G11	5.0000	4.0000	5.0000	5.0000	0.0800	4.0000
G22	6.0000	10.0000	3.0000	5.0000	0.2083	10.0000

Table 7: PI tuning values for the two diagonal loops.

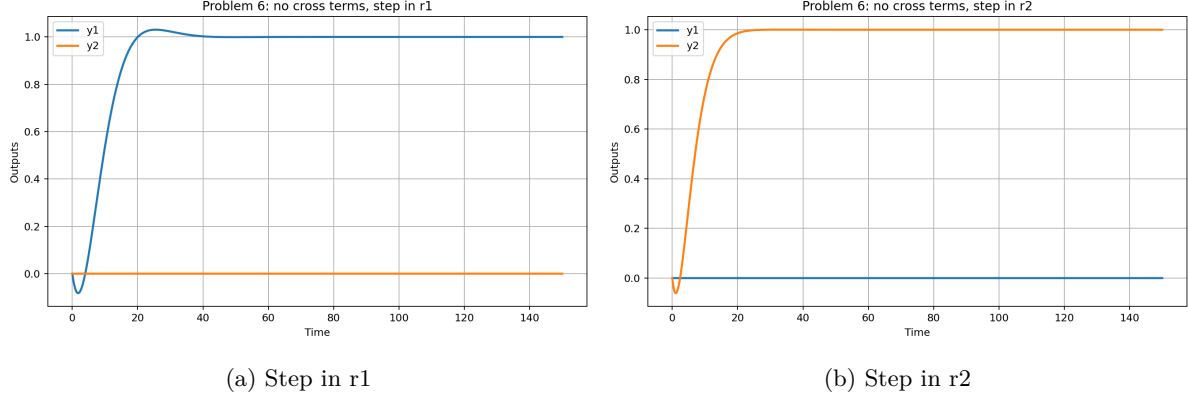


Figure 4: Problem 6 responses with cross terms neglected.

Problem 7: Cross Terms Included

Test	Controlled-output IAE	Interaction area
Step in r1	12.4987	6.0371
Step in r2	9.9989	4.3096

Table 8: Problem 7 performance with cross terms included.

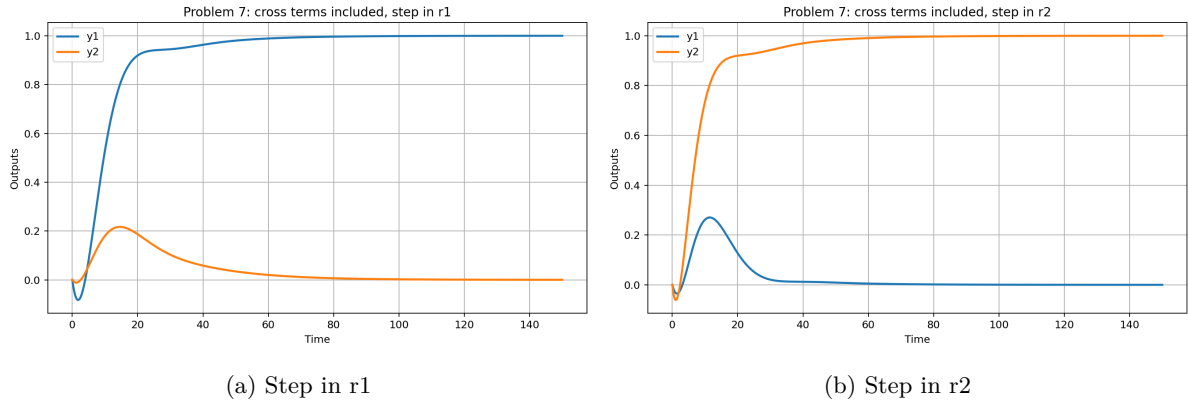


Figure 5: Problem 7 responses with cross terms included.

Problem 8: Static Decouplers

$$D_{12} = -\frac{K_{12}}{K_{11}} = -\frac{2}{5}, \quad D_{21} = -\frac{K_{21}}{K_{22}} = -\frac{3}{6}$$

Test	Controlled-output IAE	Interaction area
Step in r1	12.4998	0.7781
Step in r2	9.9998	1.7950

Table 9: Problem 8 performance with static decouplers.

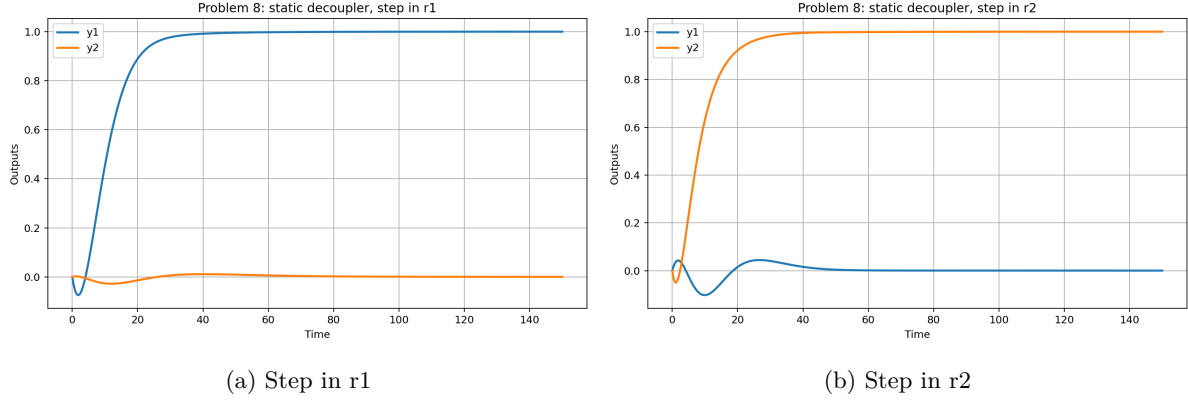


Figure 6: Problem 8 responses with static decouplers.

Problem 9: Dynamic Decouplers

$$D_{12}(s) = -\frac{G_{12}}{G_{11}} = -\frac{2}{5} \frac{4s+1}{8s+1} e^s$$

$$D_{21}(s) = -\frac{G_{21}}{G_{22}} = -\frac{3}{6} \frac{10s+1}{12s+1}$$

The term $e^{\{s\}}$ in D_{12} is noncausal because it is equivalent to a negative delay. Therefore, the realizable dynamic decoupler uses only the rational part of D_{12} .

$$D_{12,realizable}(s) = -\frac{2}{5} \frac{4s+1}{8s+1}$$

Test	Controlled-output IAE	Interaction area
Step in r1	12.4998	0.0000
Step in r2	9.9998	0.5159

Table 10: Problem 9 performance with dynamic decouplers.

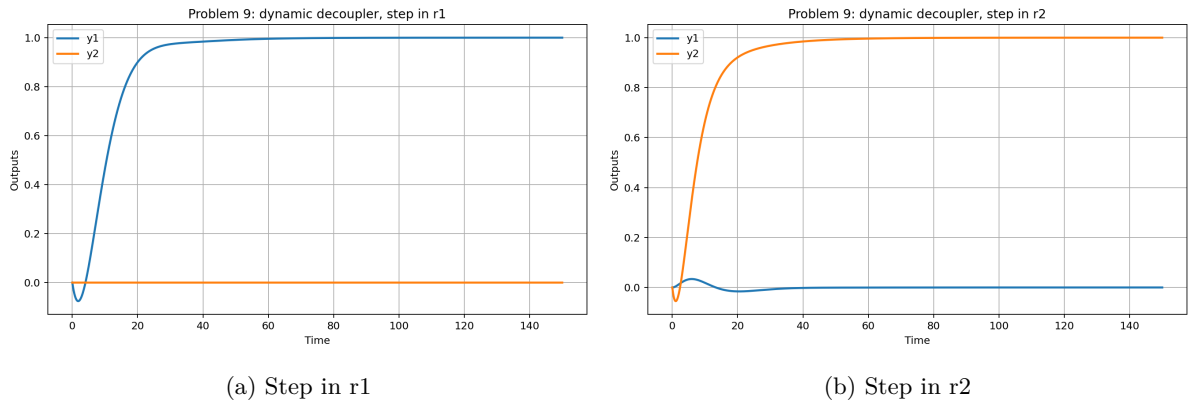


Figure 7: Problem 9 responses with dynamic decouplers.

Problem 10: Comments on MIMO Results

Case	Step in r1: IAE y1	Step in r1: y2 area	Step in r2: y1 area	Step in r2: IAE y2
No cross terms	10.7171	0.0000	0.0000	8.0037
Cross terms	12.4987	6.0371	4.3096	9.9989
Static decoupler	12.4998	0.7781	1.7950	9.9998
Dynamic decoupler	12.4998	0.0000	0.5159	9.9998

Table 11: Summary of MIMO response metrics for Problems 6--10.

When the cross terms are added, a change in one loop causes movement in the other output, showing loop interaction. Static decouplers reduce the steady-state interaction because they cancel the cross-gains at zero frequency. However, static decoupling cannot remove all transient interaction because the cross terms have different delays and time constants. Dynamic decouplers account for those dynamics and should reduce interaction further, but any noncausal negative-delay terms must be removed or approximated with a realizable transfer function.