


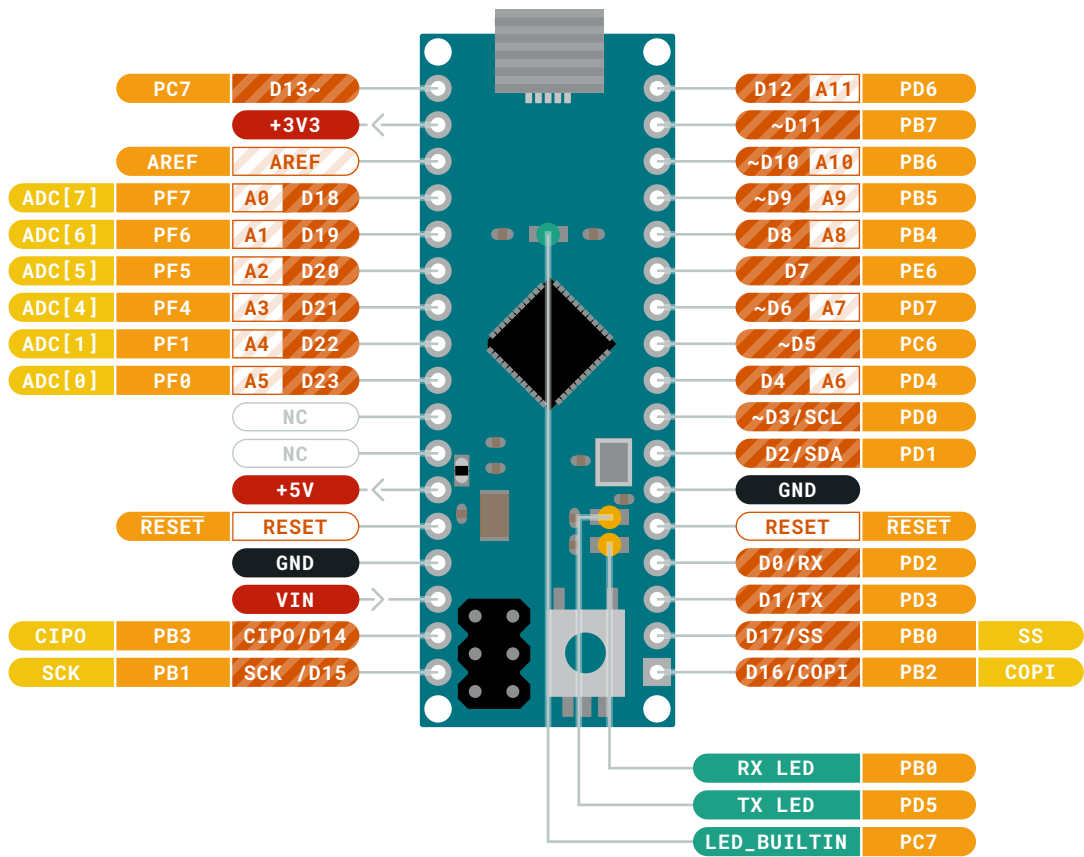

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default


MAXIMUM current per I/O pin is 40mA

MAXIMUM current per +3.3V pin is 50mA

VIN 6-9 V input to the board.

NOTE: CIP0/COPI have previously been referred to as MISO/MOSI



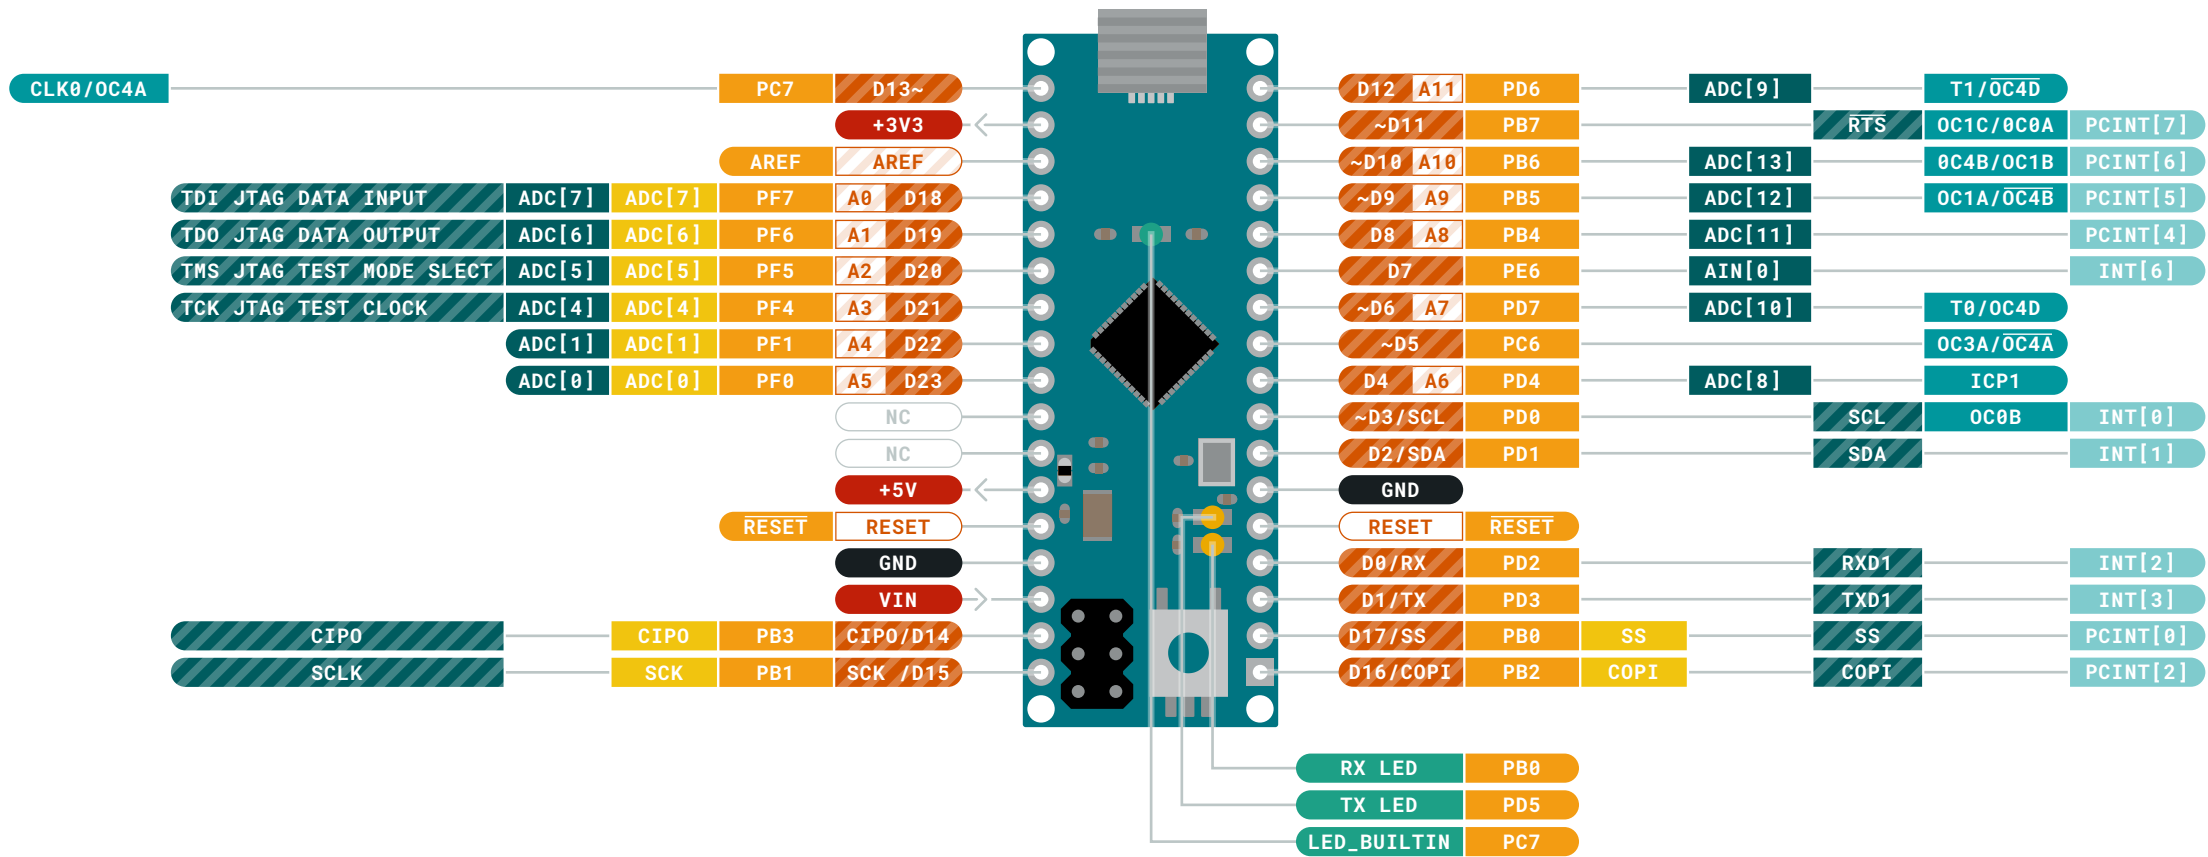

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default
- Analog
- Communication
- Timer
- Interrupt
- Sercom


MAXIMUM current per I/O pin is 40mA

MAXIMUM current per +3.3V pin is 50mA

VIN 6-9 V input to the board.

NOTE: CIP0/COPI have previously been referred to as MISO/MOSI



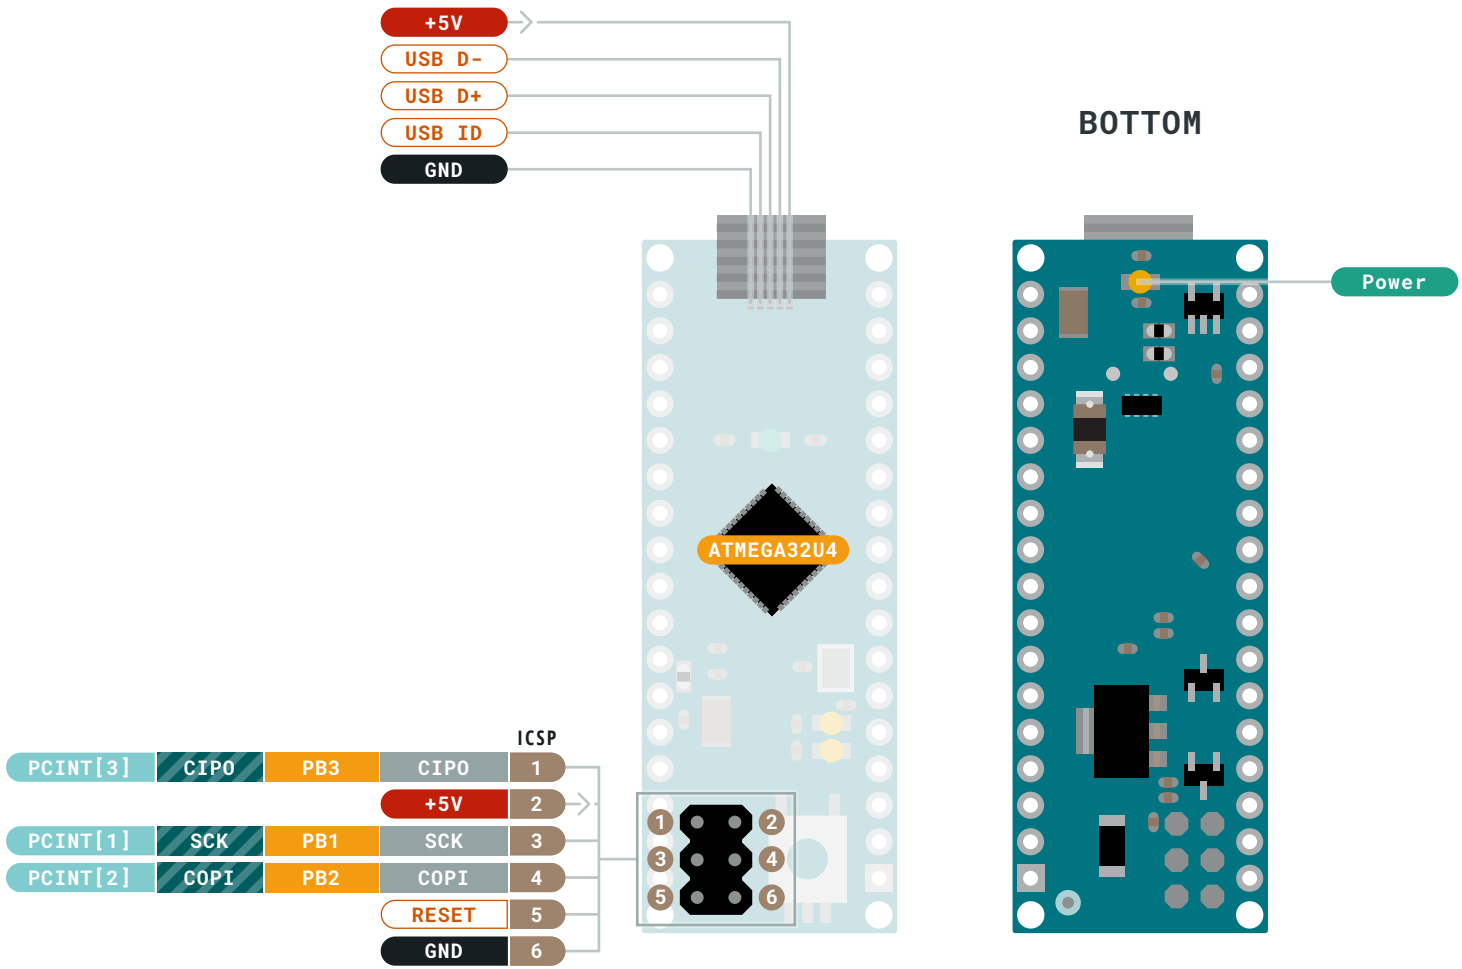

- | | | |
|--------------|------------------------|---------------|
| Ground | Digital Pin | Analog |
| Power | Analog Pin | Communication |
| LED | Other Pin | Timer |
| Internal Pin | Microcontroller's Port | Interrupt |
| SWD Pin | Default | Sercom |

MAXIMUM current per I/O pin is 40mA

MAXIMUM current per +3.3V pin is 50mA

VIN 6-9 V input to the board.

NOTE: CIPO/COPI have previously been referred to as MISO/MOSI

