NAMA PEMILIK PROYEK : **PT PERTAMINA EP**

NAMA PROYEK : **JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR**

LOKASI : **SP TANJUNG MIRING BARAT & KARANG TIMUR - FIELD LIMAU**

NO. KONTRAK : **SA02035383B**

REV.	TGL.	DESKRIPSI	DISIAPKAN	DIPERIKSA	DISETUJUI	DIPERIKSA	DISETUJUI
A	18-12-25	Issued For Review	NA	AS	RTN		
			PT. PROSYMPAC OIL & GAS			PT. PERTAMINA EP	

TABEL REVISI

Rev.	Tanggal	Deskripsi

COMMENT RESPONSE SHEET

No.	Page	Company's Comment	Contractor's Response	Remarks

PGG	JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	Doc. No: TMBP-SP001-PS-DST-D104
		PAGE 1 of 1
		Date: 18-Dec-25

DATASHEET OF FIRE EXTINGUISHER SYSTEM (FM-200)

1	**1. General Information**						
2	Service	:	FM-200 (HFC-227ea)	Item No.	:	-	
3	Location	:	Indoor	Type	:	-	
4	Standard	:	NFPA 2001	Approval	:	UL Listed/FM Approved	
5							
6	**2. Operating Conditions**						
7	Class of Fire	:	C (Electrical) NFPA 2001	Protected Room	:	Electrical Room	Battery Room
8	Ambient Temperature	:	27 °C			Instrument Room	Operator Room
9							
10	**3. Scope of Supply and Installed**						
11	FM-200 Agents			Galvanized Anchor Bolt/Nut for Skid Installation			
12	FM-200 Cylinders (Tanks and Valve Assembly)			Cylinder Rack			
13	Reserve FM-200 Cylinders (Tanks and Valve Assembly)			Spare Parts for Commissioning and 2 years operation			
14	Control Panel (PLC Based)			Test and Inspection			
15	Distribution System (Piping, Valve, Nozzle, etc)			Others	:	Design (P&ID, GA Dwaring, Calculation as per NFPA 2001	
16	Electrical Cabelling or Wiring			Others	:	FM 200 Cylinder is Stored Pressure	
17							
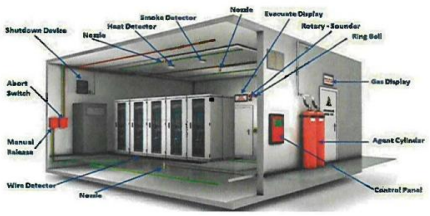
18	**4. Design Features**			
19	Agent	Agent Type	FM-200 (HFC-227ea)	
20		Total Flooding Discharge Time	10 Seconds	
21		Design Concentration	7,5 %	
22		Protected Room Temperature	27	
23		Total Agent Required	300 kg	
24	Cylinder	Cylinder Quantity Req.	6	
25		Cylinder Capacity	50 kg	
26		Gross Weight	VTA kg/cylinder	
27		Cylinder Pressure	VTA barG	
28		Storage Temperature	Ambient	
29		Material	VTA	
30		Dimension	VTA	
31		Operation Mode	Automatic and Manual Release	
32		Installation Mode	Cylinder Rack	
33		Features/Accessories	Pressure Relieve Device	Name Plate
34			Pressure Gauge (IP 65)	Cabinet
35			Pressure Switch, (IP 65)	Operational Instruction
36			Safety Hatch	Others
37			Others	Others
38	Control Panel	Dimension	: VTA	
39		Features/Accessories (as per applicable)	Inhibit-Auto Selector Key	
40			Inhibit mode indication	
41			Master-Reserve Exchange	
42			Release Indication (audio-visual) for each room	
43			Junction Box	
44			AC to DC Converter	
45			Battery Back Up	
46	Distribution System	Piping Material	VTA	
47		Nozzle Material	VTA	
48		Valve Material	VTA	
49		Nozzle Quantity	VTA	
50		Features/Accessories	Pressure Gauge	
51			Pressure Switch	
52	Other Accessories	Release Indicator/Sign (audio&visual)		
53		Manual Release Push Button		
54		Manual ABORT/HOLD Push Button		
55		Warning Sign/Indicator (audio and visual) for eva		
56				
57				
58	**5. DRAWING**			
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72