Exp 9 IMPLEMENTATION OF SUBNETTING IN CISCO PACKET TRACER SIMULATION

Classless IP subnetting is a technique that allows for more efficient use of IP address by allowing for subnet mask.

Creating a network topology


To create a network topology in packet trace, select "new" button in top, then select Network & generic

Adding the device :-

To add a device, select the device from bottom left and drag it onto network topology.

Subnetting

To subnet the network address of 192.168.1.0/24 to provide enough space for atleast 5 address for end devices switch and router.

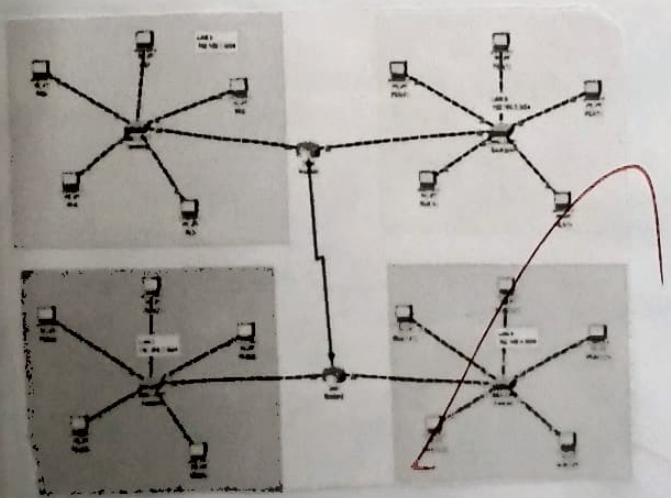

configuring the device

Right click on router & select "CLI". This will open by configuring the router. Right click CLI enter following commands

enable

interface Fast Ethernet 0/0

ip address [IP address] [Subnet mask]

no shutdown

exit

- interface Fast Ethernet 0/1

ip address [IP address] [subnet mask] no shutdown

exit

RESULT:-

The implementation has been completed successfully.