















#### <u>Foxtech</u>

#### Insight Series Data/Video Wireless Transmission System

	(No Reviews)	Write A Review						
\$429.00 - \$490.00								
SKU:	S2009181							
Weight:	2.00 KGS							
Version: Requ	uired							
Insight Pro	1080P Lite Ins	sight Pro 1080P FHD	Insight Pro 4K UHD					
	D TO CART							
SEND MOUNT MOW								

### Description\_

Insight series is a cost-effective digital transmission system, which supports HDMI output and up to 4 images split-screen display, allowing you to watch the video in real-time. The operation hours of the Pro receiver are as long as 4 hours with a built-in 3000 mAh Li-Po battery. There are four types to choose with different transmission range to accommodate different scenarios. The longest range reaches up to 3km.

### Your Purchase Includes:

Insight S: lx Pro Receiver lx SE's 200 mW Transmitter 2x Transmitter Antenna 2x Receiver Antenna lx USB Charger lx Cable Package


Insight Pro 1080P Lite: 1x Pro Receiver 1x Pro Transmitter 2x Transmitter Antenna 2x Receiver Antenna 1x USB Charger 1x Cable Package


Insight Pro 1080P FHD: 1x Pro Receiver 1x Pro Transmitter 2x Transmitter Antenna


SEND INQUIRY CHAT NOW



Insight Pro 4K UHD:
Ix Pro Receiver
Ix Pro Transmitter
2x Transmitter Antenna
2x Receiver Antenna
Ix USB Charger

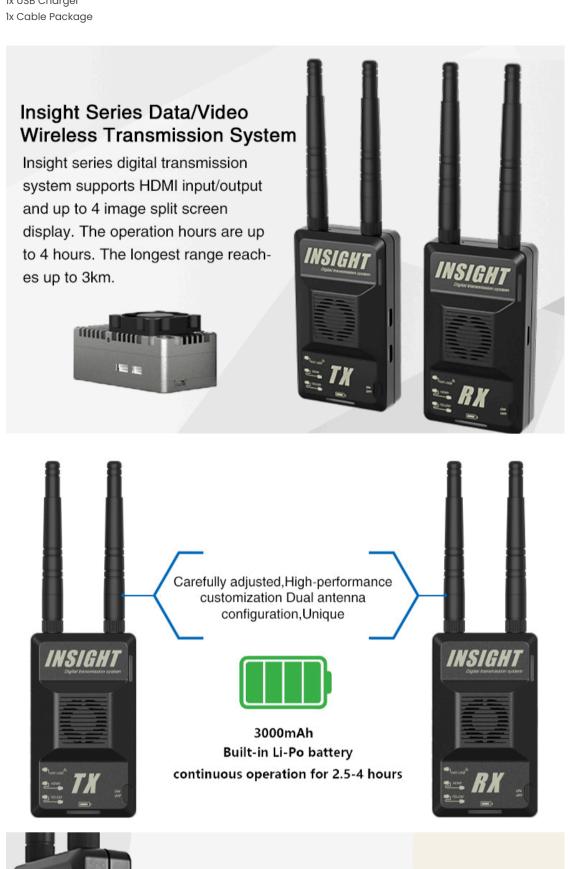

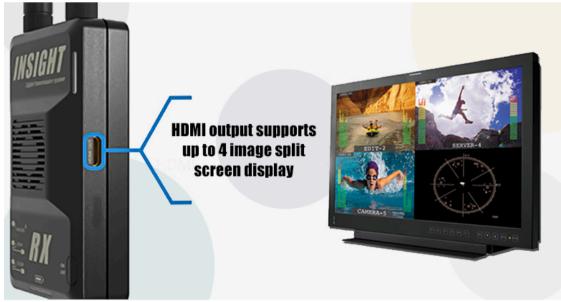


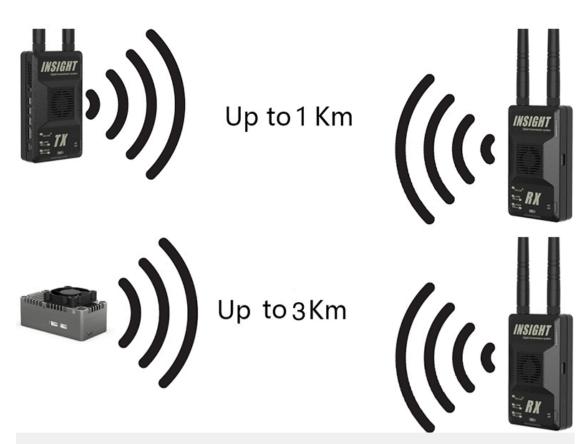




Careful selection, excellent craftsmanship
User standard pure copper SMA antenna
Interface, Not only maintain quality also
provide users with a wider range of
extended performance


Built-in fan — Ultra-quite design

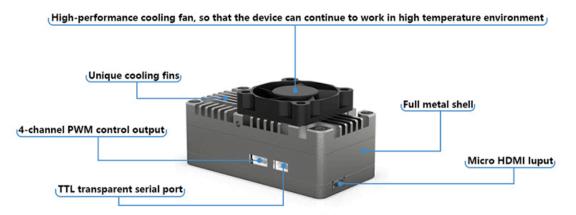

Size: 67\*37\*20mm weight: 70g



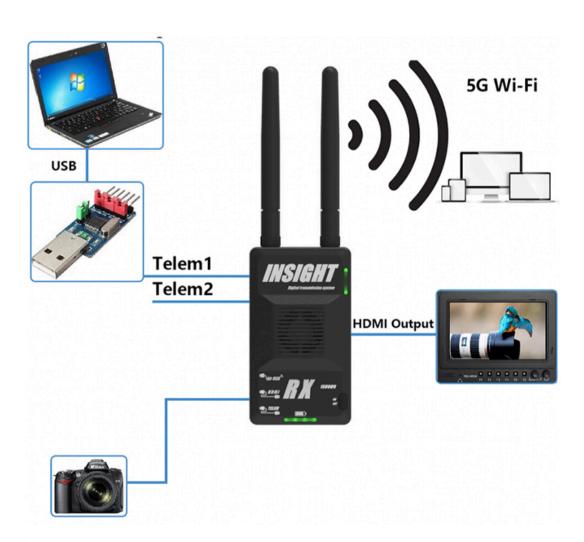

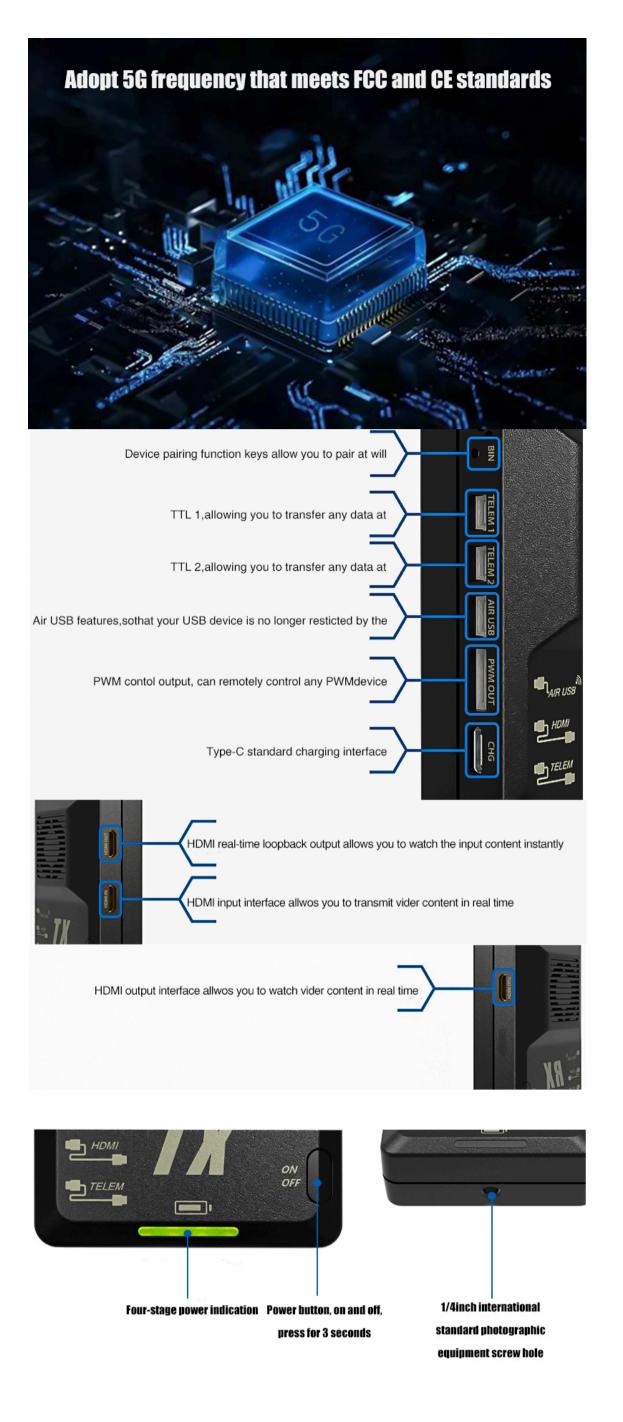

Insight	Series Transn	nission System	Comparison	Chart
Туре	Insight S	Insight PRO 1080P Lite	Insight PRO 1080P FHD	Insight PRO 4K UHD
Range(Outdoor)	зкм	Standard antenna 3KM	Standard antenna 1KM	Standard antenna 500m
Delay	50-80ms	50-60ms	50-60ms	50-60ms
Frequency	5.1GHz-5.8GHz	5.1GHz-5.8GHz	5.1GHz-5.8GHz	5.1GHz-5.8GHz
Modulation	OFDM	OFDM	OFDM	OFDM
Input/Output interface	Mini HDMI/Micro HDMI	Mini HDMI	Mini HDMI	Mini HDMI
Input video format	HDMI 1080P @30	HDMI full format up to 4K UHD @30	HDMI full format up to 4K UHD @30 input	HDMI 4K UHD @30,compatible 1080@30@60
Output format	720p@30, 1080p@30	1080p@30@60	1080p@30@60	HDMI 4K UHD @30
Compression ratio	Standard definition	Standard definition	HEVC 3A HD TV broadcast level	HEVC 3A HD TV broadcast level
Channels	9-24 channels	24 channels	24 channels	24 channels
Support device	HDMI display, mobile phone, tablet, computer	HDMI display, mobile phone, tablet, computer	HDMI display, mobile phone, tablet, computer	HDMI display, mobile phone, tablet, computer
System support	Windows, Android, iOS	Windows, Android, iOS	Windows, Android, iOS	Windows, Android, iOS
Data interface	UART serial port data transparent transmission interface	USB, UART serial port data transparent transmission interface	USB, UART serial port data transpar- ent transmission interface	USB, UART serial port data transparent transmission interface
PWM	4 sets of PWM signal output gimbal and other external equipment control	6 sets of PWM signal output PTZ and other external equipment control	6 sets of PWM signal output PTZ and other external equipment control	6 sets of PWM signal output PTZ and other external equipment control
Encryption	256 bit Encryption equipment control	256 bit Encryption	256 bit Encryption	256 bit Encryption
Operating temperature	-20°C-60°C	-20°C-60°C	-20°C-60°C	-20°C-60°C
Certification	FCC, CE standards	FCC, CE standards	FCC, CE standards	FCC, CE standards
Charging port	Type-c 5v charging port	Type-c 5v charging port	Type-c 5v charging port	Type-c 5v charging port
Battery	The receiver built-in 3000mAh Li-Po battery (continuous work for 4 hours)	(Receiver / Trans- mitter) Built-in 3000mAh Li-Po battery (con- tinuous work 4 hours / 2.5 hours)	(Receiver / Trans- mitter) Built-in 3000mAh Li-Po battery (con- tinuous work 4 hours / 2.5 hours)	(Receiver / Trans- mitter) Built-in 3000mAh Li-Po battery (con- tinuous work 4 hours / 2.5 hours)
Size(each)	Ground unit (116.9 SMA connector include) 112.6*64.6*31.5m m, weight 220g	(116.9 SMA connector include) 112.6*64.6*31.5 mm, weight 220g	(116.9 SMA connector include) 112.6*64.6*31.5 mm, weight 220g	(116.9 SMA connector include) 112.6*64.6*31.5mm , weight 220g

Why Choose Us\_

# **Related Products**









\$4,399.00

 $\star\star\star\star\star$ 

\$22,099.00

\*\*\*\*

 $\star\star\star\star\star$ 

\$6,599.00 - \$32,099.00

 $\star\star\star\star\star$ 

ADD TO CART


**CHOOSE OPTIONS** 


## **LEAVE A MESSAGE**

If you have any questions about our products or services, feel free to reach out to customer service team.

Name	
E-mail	
Country	
Phone/WhatsApp/Skype	
Company Name	
Content	
I'm not a robot  reCAPTCHA  Privacy - Terms	

SEND INQUIRY NOW

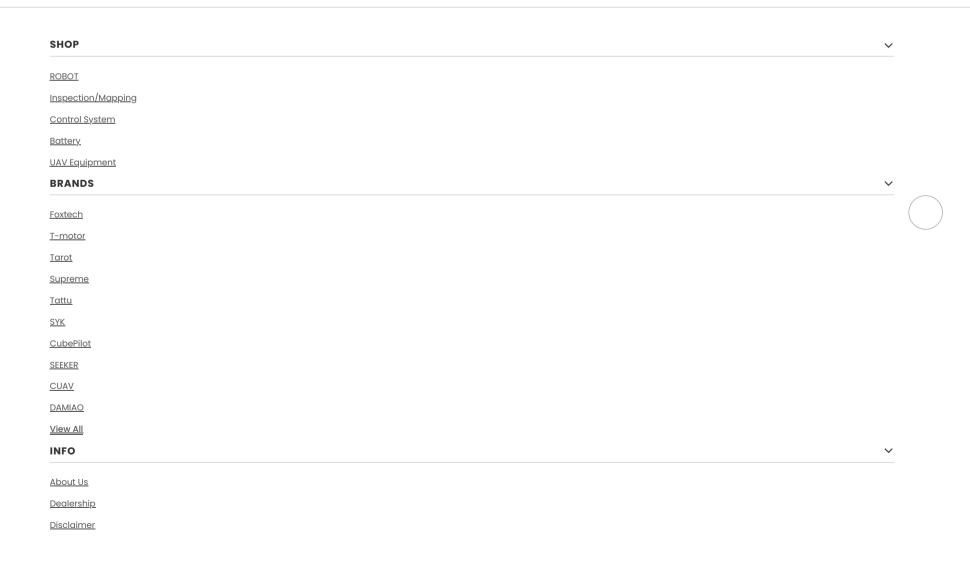

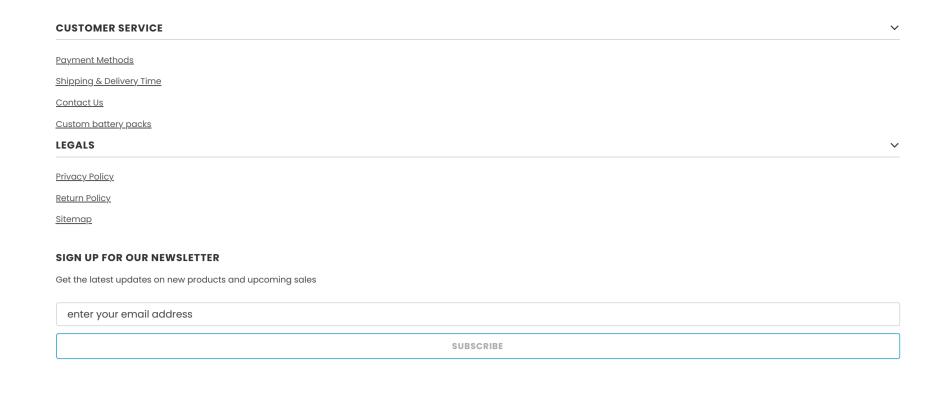



Need help? No problem! Our customer service team will respond to your message promptly. <u>LiveChat</u> or <u>Email Us</u>

© 2025 Foxtech All Rights Reserved.











