

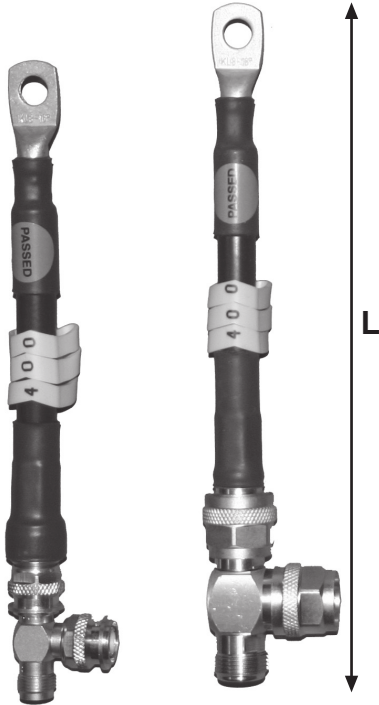


# ComAnt<sup>®</sup> Communications Antennas

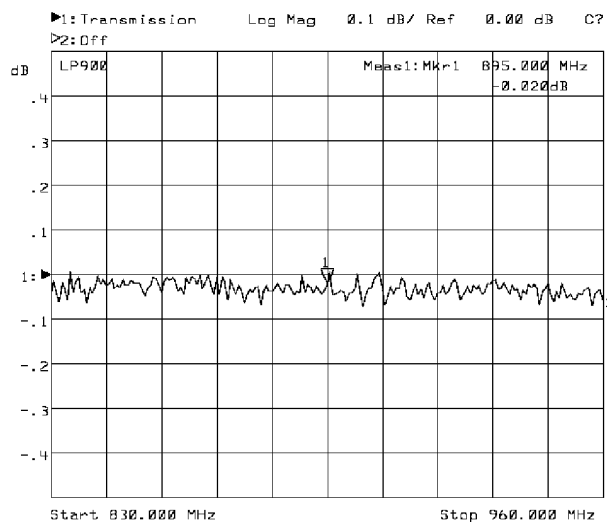

## FREQUENCY INDEPENDENT DATA

Description: lightning protector, quarter wave shorting stub  
 Frequency: 70-90 MHz, 144-176 MHz, 210-250 MHz, 380-475 MHz, 830-960 MHz, 2300-2500 MHz  
 Impedance: 50 ohm  
 Connector: N-female - N-male, TNC-female - TNC-male  
 VSWR: < 1.2  
 Attachment: M8  
 Temperature: -40° - +80°C  
 IP: 67 (LP-N) 62 (LP-TNC)

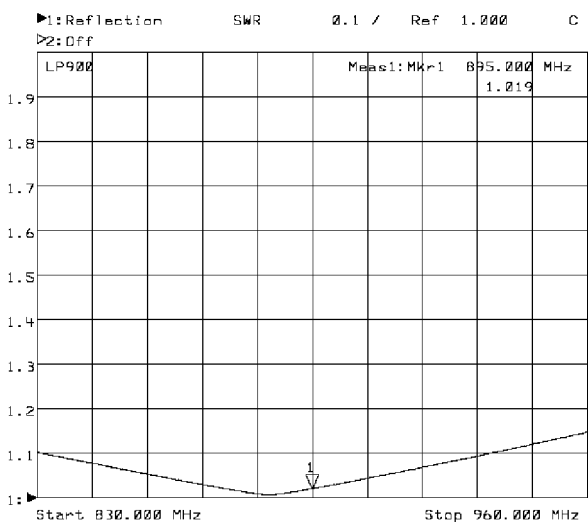

LP LIGHTNING PROTECTOR