


**Model FAC0400****Product specification:**


- For indoor use
- Window size:  $\varnothing 10\text{mm}$
- Primary current: 0-5A current
- Secondary output: 0.333v
- Nylon housing, UL94-V0 rated
- Wire lead: UL1015 24AWG
- Voltage level: 0.3/0.66/0.72KV
- Withstand voltage level: 3.0KV/1min
- Rated frequency: 50/60HZ

**Drawing size:****Reference Performance:**

| Model   | Input (A) | Turns Ratio | Max current (A) | Output |
|---------|-----------|-------------|-----------------|--------|
| FAC0400 | 0-5AAC    | 3000:1      | 80AAC           | 0.333v |

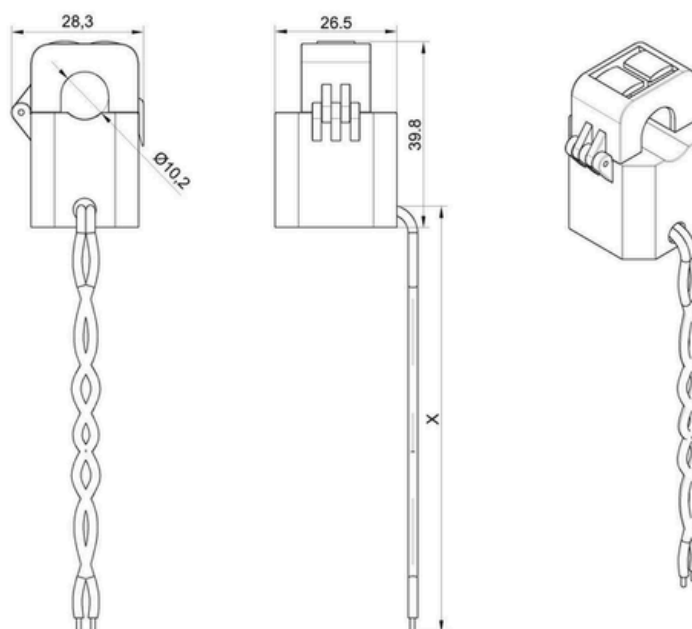

## Current direction and input curve



S1-White S2-Black

5A/0.333V

