


Model FAC1043

Product specification:

- For indoor use
- Window size: $\varnothing 10\text{mm}$
- Primary current: 0-25A current
- Secondary output: 0.333v
- Nylon housing, UL94-V0 rated
- Wire lead: UL1015 24AWG
- Voltage level: 0.3/0.66/0.72KV
- Withstand voltage level: 3.0KV/1min
- Rated frequency: 50/60HZ
- Operating temperature: $-20^{\circ}\text{C} \sim 55^{\circ}\text{C}$

Drawing size:

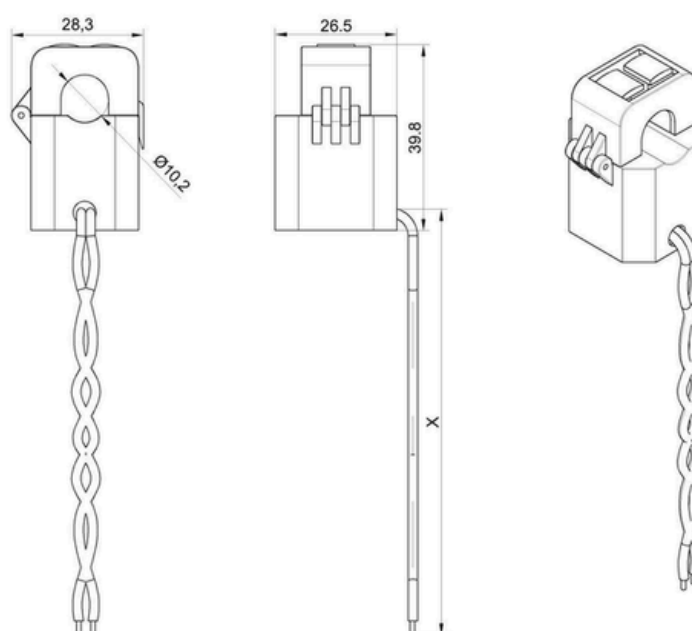


Reference Performance:

Model	Input (A)	Turns Ratio	Max current (A)	Output
FAC1043	0-25AAC	3000:1	80AAC	0.333v



Current direction and input curve

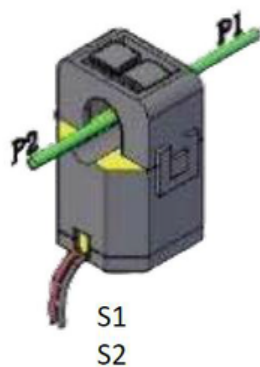

S1-White S2-Black

25A/0.333V

