


Model FAC1031

Product specification:

- Primary current: 0-250A current
- Secondary output: 0.333v
- Rated Frequency: 50HZ or 60HZ.
- Voltage level: 0.3/0.66/0.72KV.
- Withstand voltage level: 3.0KV/1min.
- Operating Temperature: -20°C~55°C.
- Nylon housing: UL94-V0 rated
- Wire lead: UL1015 24AWG


Drawing size:

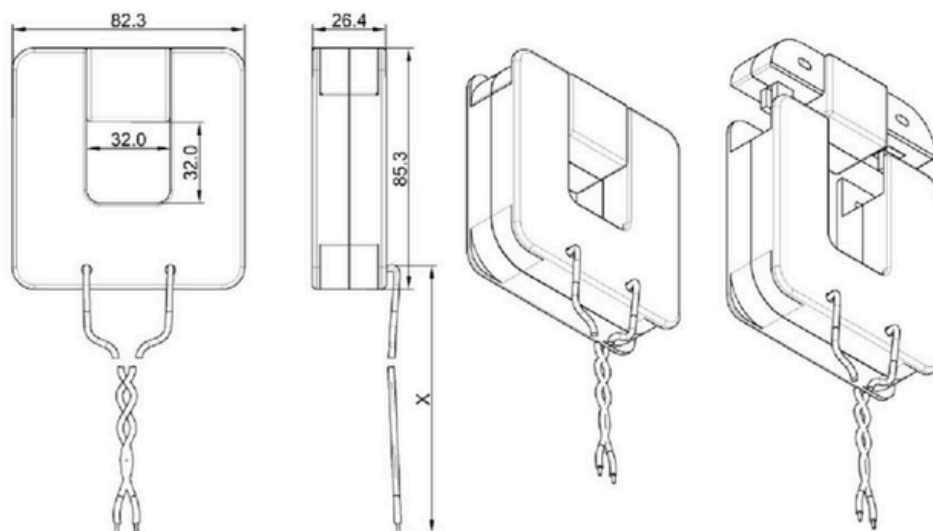

Model	Input (A)	Turns Ratio	Max current (A)	Output
FAC1031	0-250AAC	3000:1	600AAC	0.333v



Current direction and input curve:



S1-White S2-Black

