

Gemma 3 12B control arm, W=20 (EXPLORATORY). Grey = baseline turns 1-30; dashed black = scheduled change; dotted = metric threshold; solid vertical = first signal (3 turns below). Lead < 0: before CQ.


S1/budget_ledger/02
CQ@nan LS lead nan ES lead nan

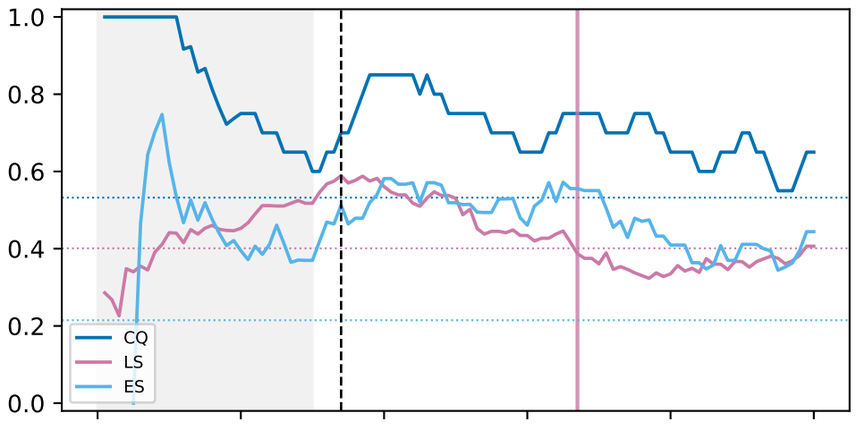



S1/budget_ledger/03
CQ@57.0 LS lead -14.0 ES lead 19.0

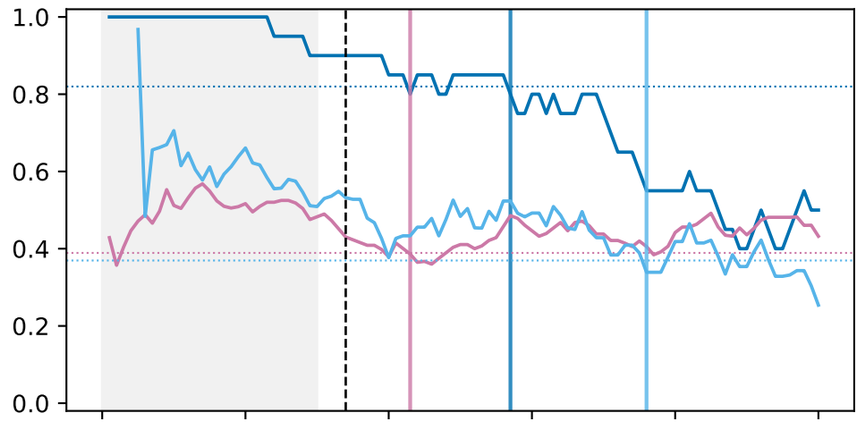


S1/budget_ledger/04
CQ@45.0 LS lead 45.0 ES lead 4.0

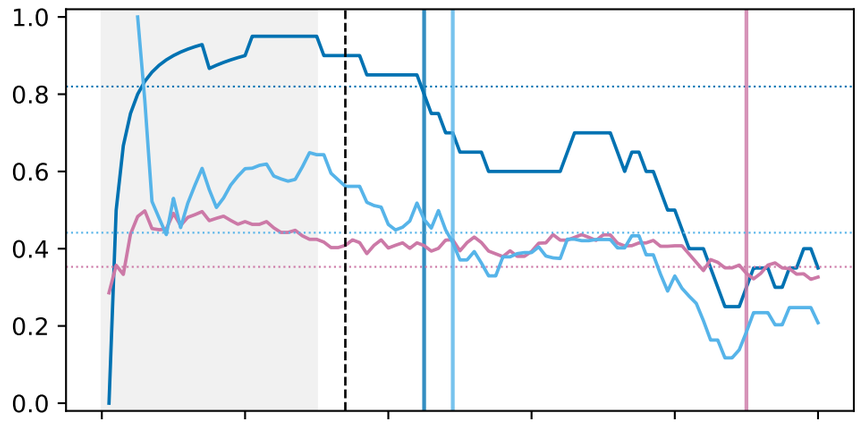


S1/inventory_logistics/02
CQ@52.0 LS lead 18.0 ES lead 31.0

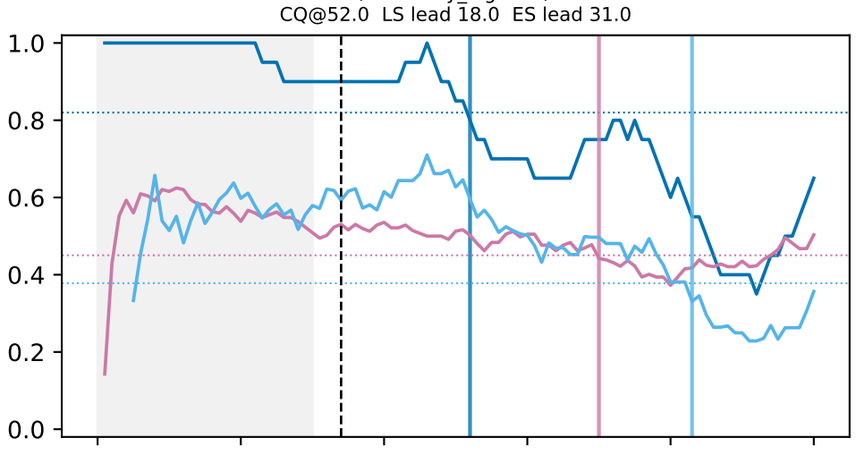


S1/inventory_logistics/03
CQ@85.0 LS lead -13.0 ES lead nan

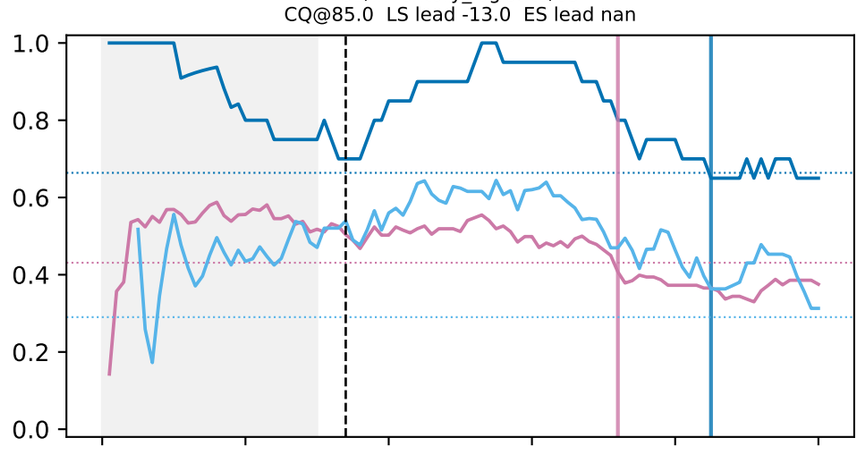


S1/inventory_logistics/04
CQ@48.0 LS lead nan ES lead nan

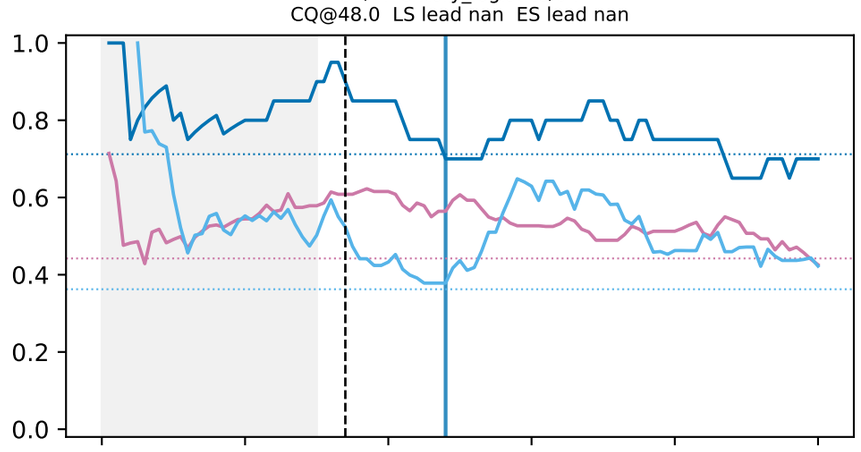


S2/budget_ledger/02
CQ@58.0 LS lead 26.0 ES lead 2.0

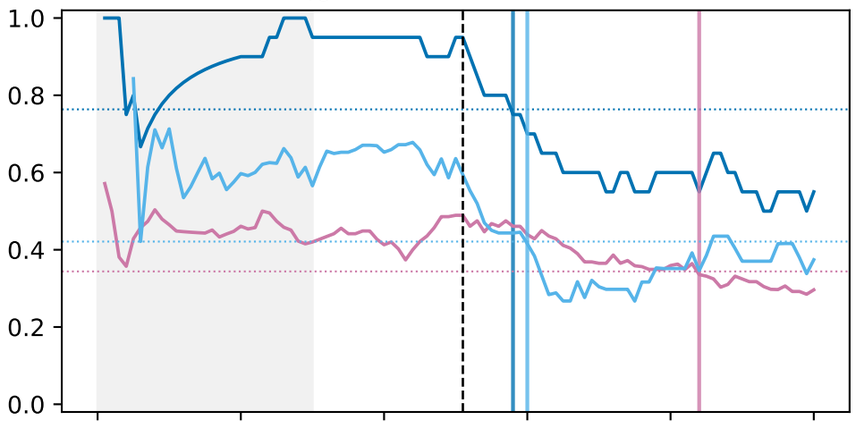


S2/budget_ledger/03
CQ@55.0 LS lead 10.0 ES lead -5.0

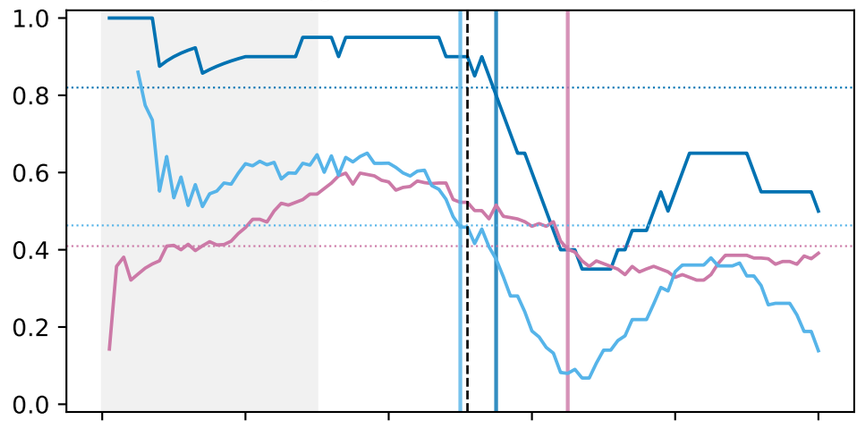


S2/budget_ledger/04
CQ@70.0 LS lead -34.0 ES lead 10.0

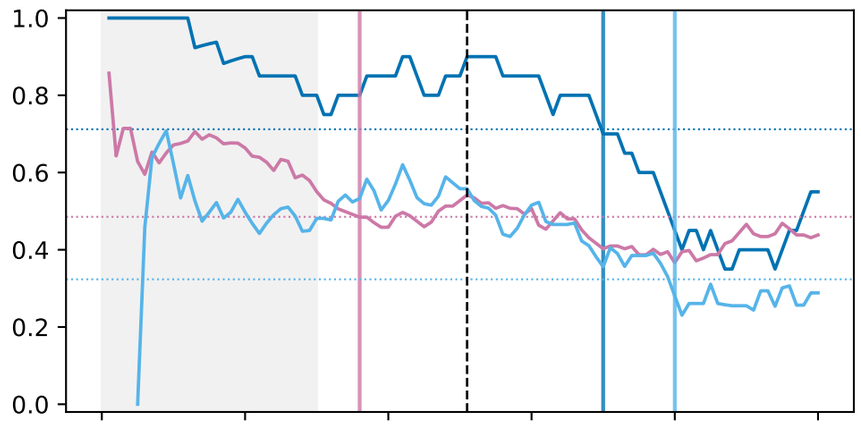


S2/inventory_logistics/02
CQ@66.0 LS lead -14.0 ES lead 1.0

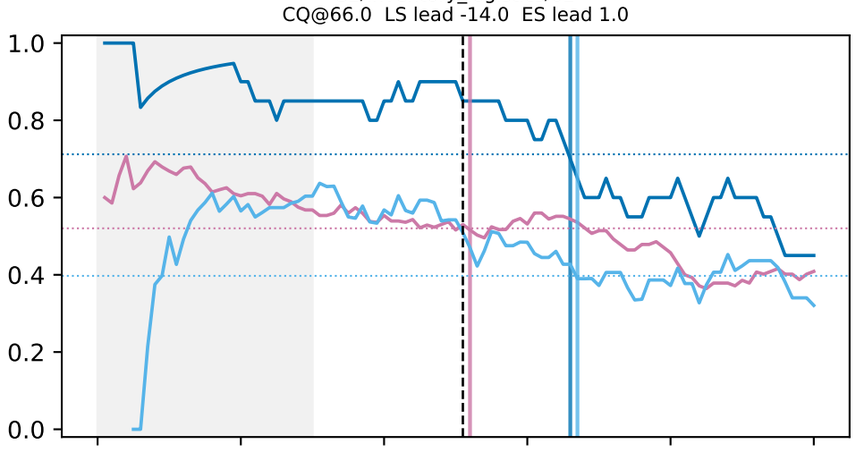


S2/inventory_logistics/03
CQ@67.0 LS lead -16.0 ES lead 3.0

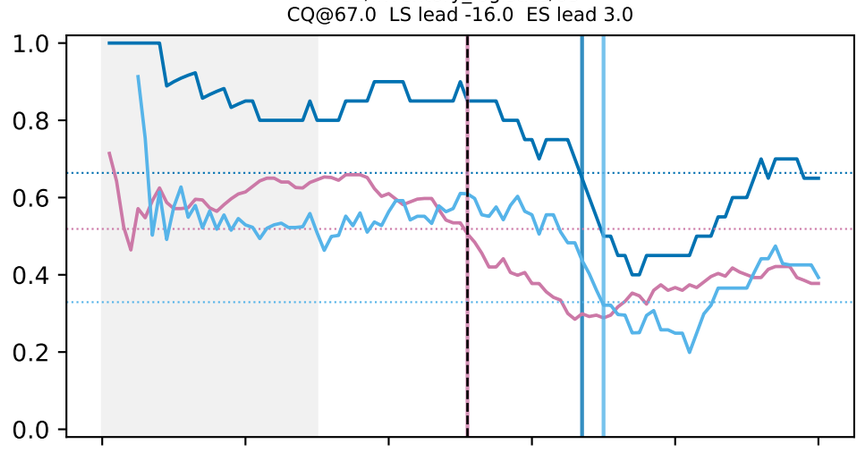


S2/inventory_logistics/04
CQ@60.0 LS lead 8.0 ES lead -1.0

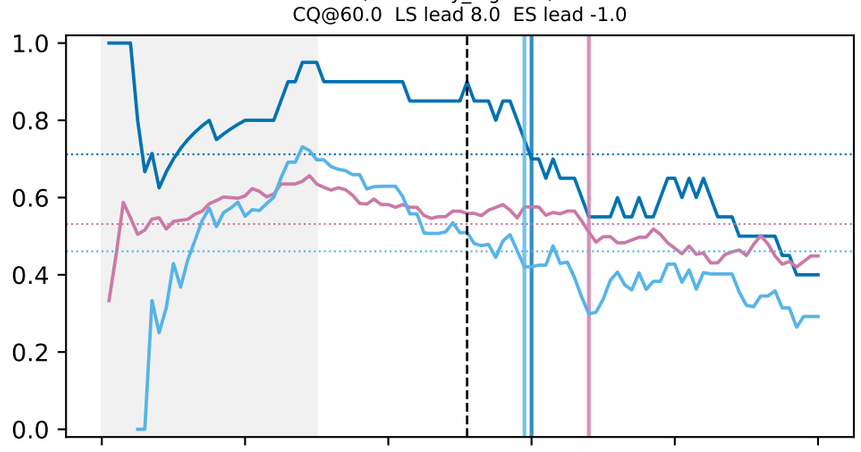


S3/budget_ledger/02
CQ@40.0 LS lead nan ES lead 21.0

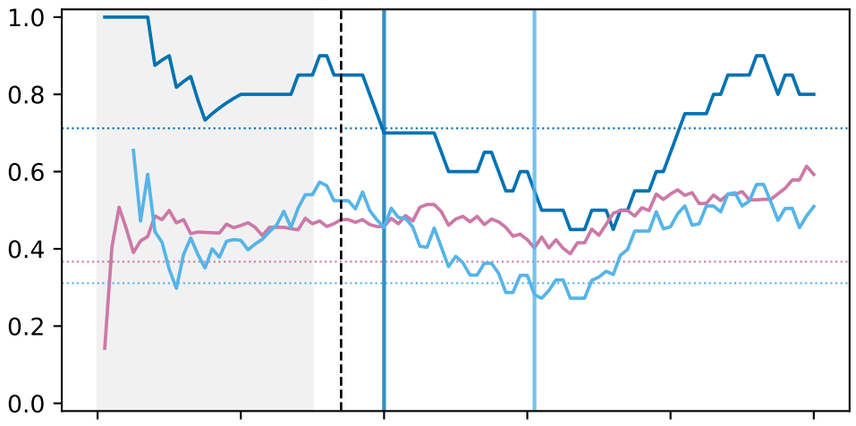


S3/budget_ledger/03
CQ@35.0 LS lead 12.0 ES lead 16.0

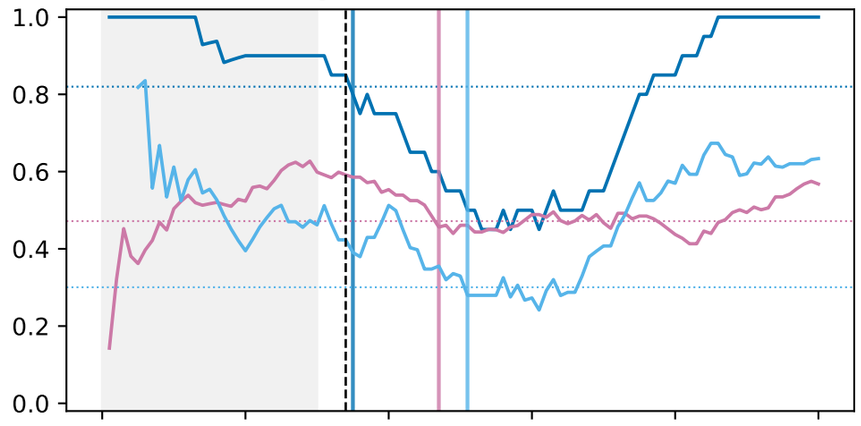


S3/budget_ledger/04
CQ@55.0 LS lead -7.0 ES lead -6.0

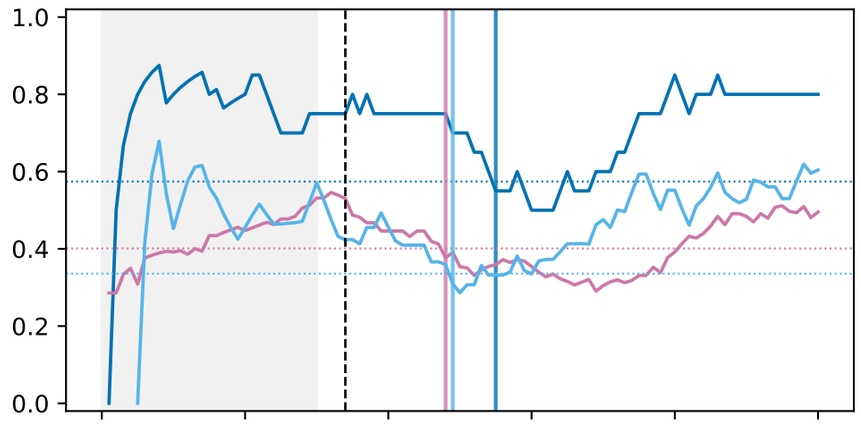

S3/inventory_logistics/02
CQ@50.0 LS lead -4.0 ES lead 2.0

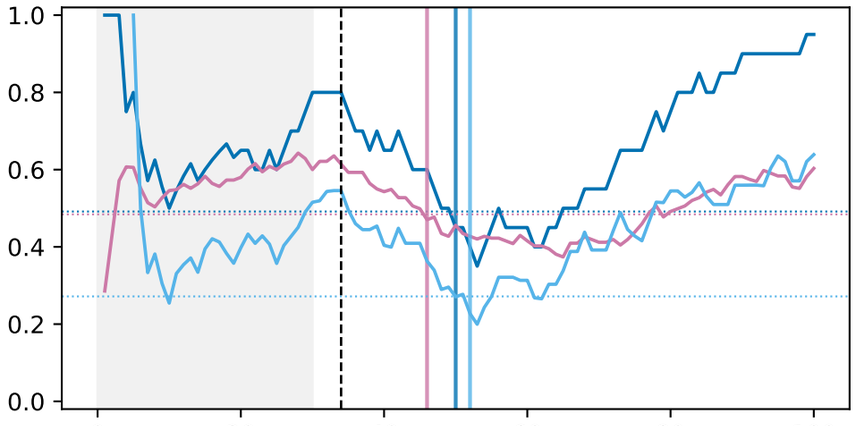

S3/inventory_logistics/03
CQ@41.0 LS lead 3.0 ES lead 1.0

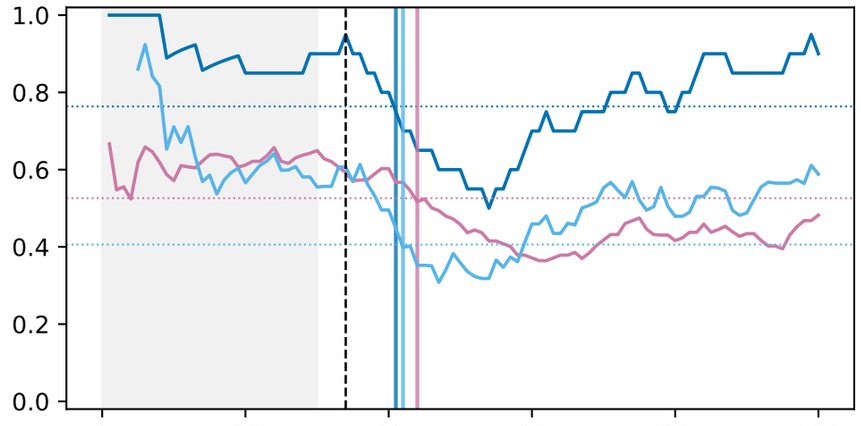

S3/inventory_logistics/04
CQ@47.0 LS lead 6.0 ES lead -3.0

