





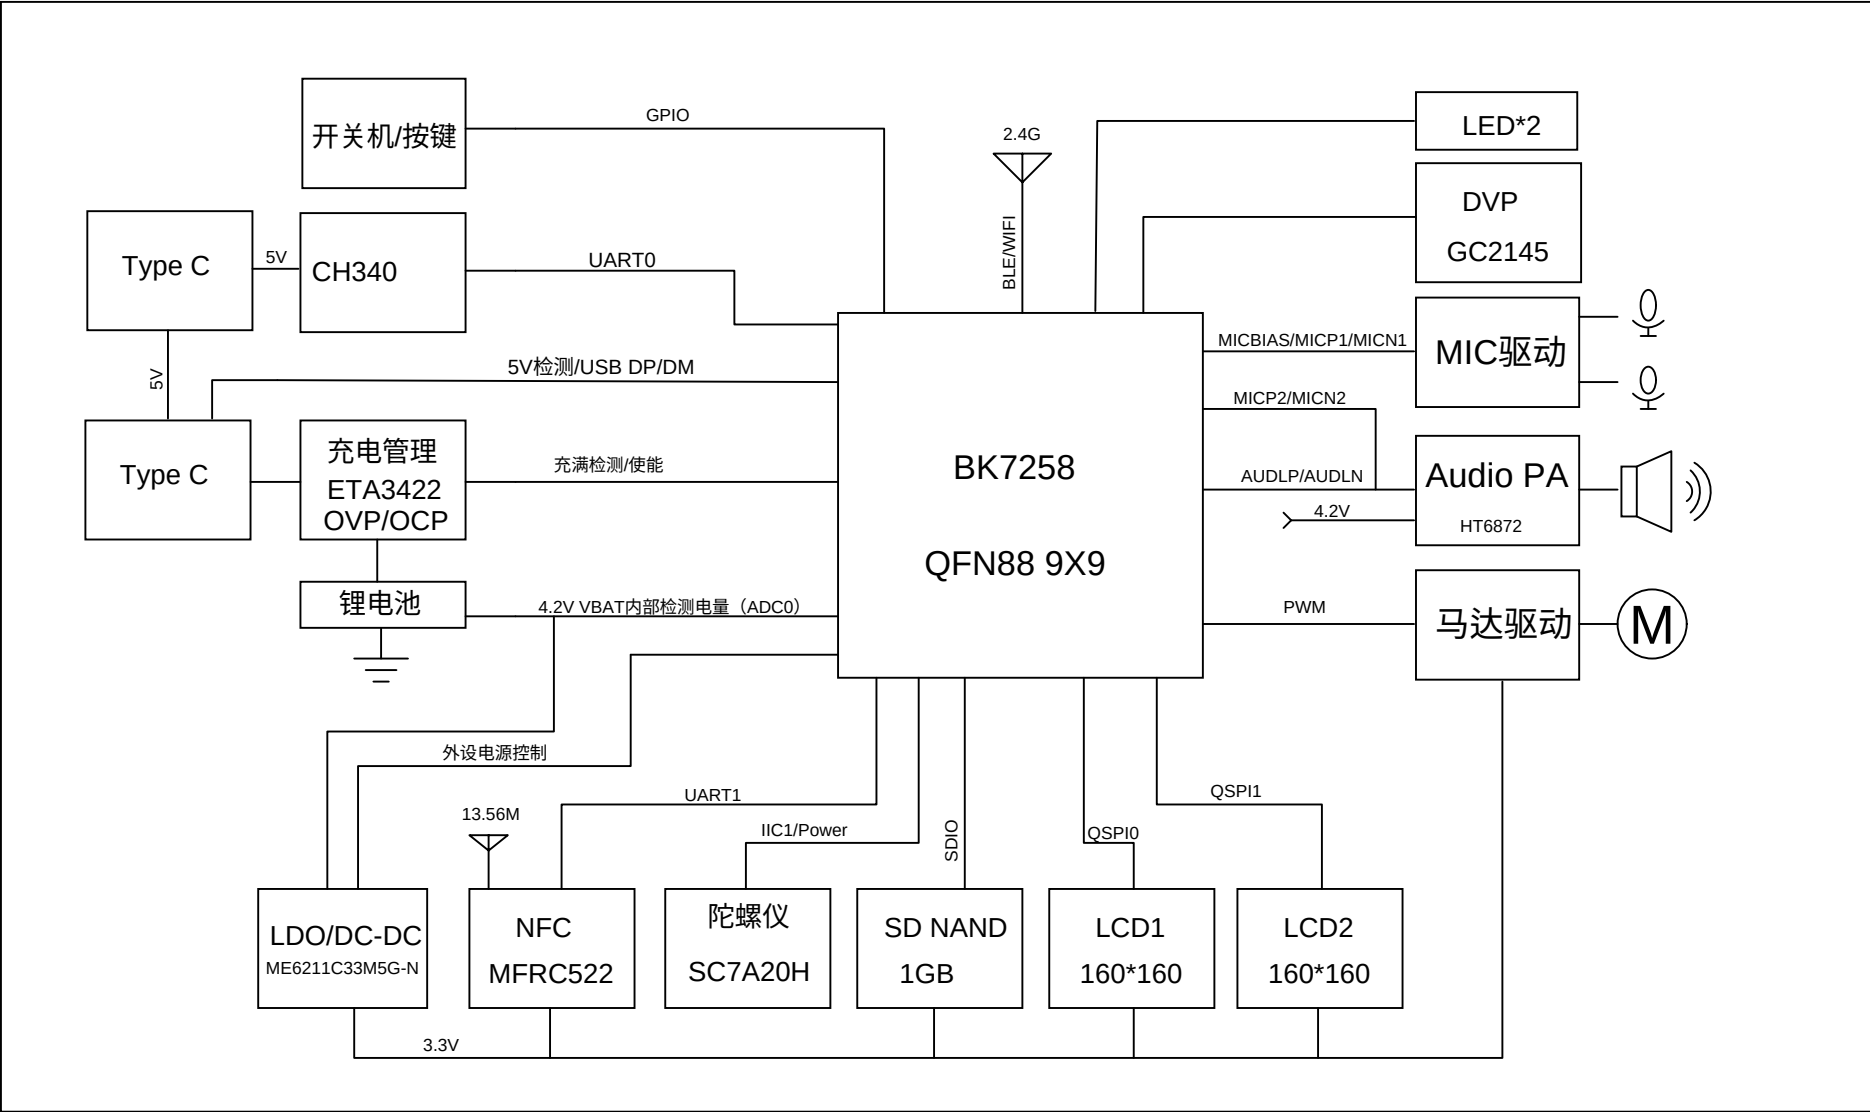

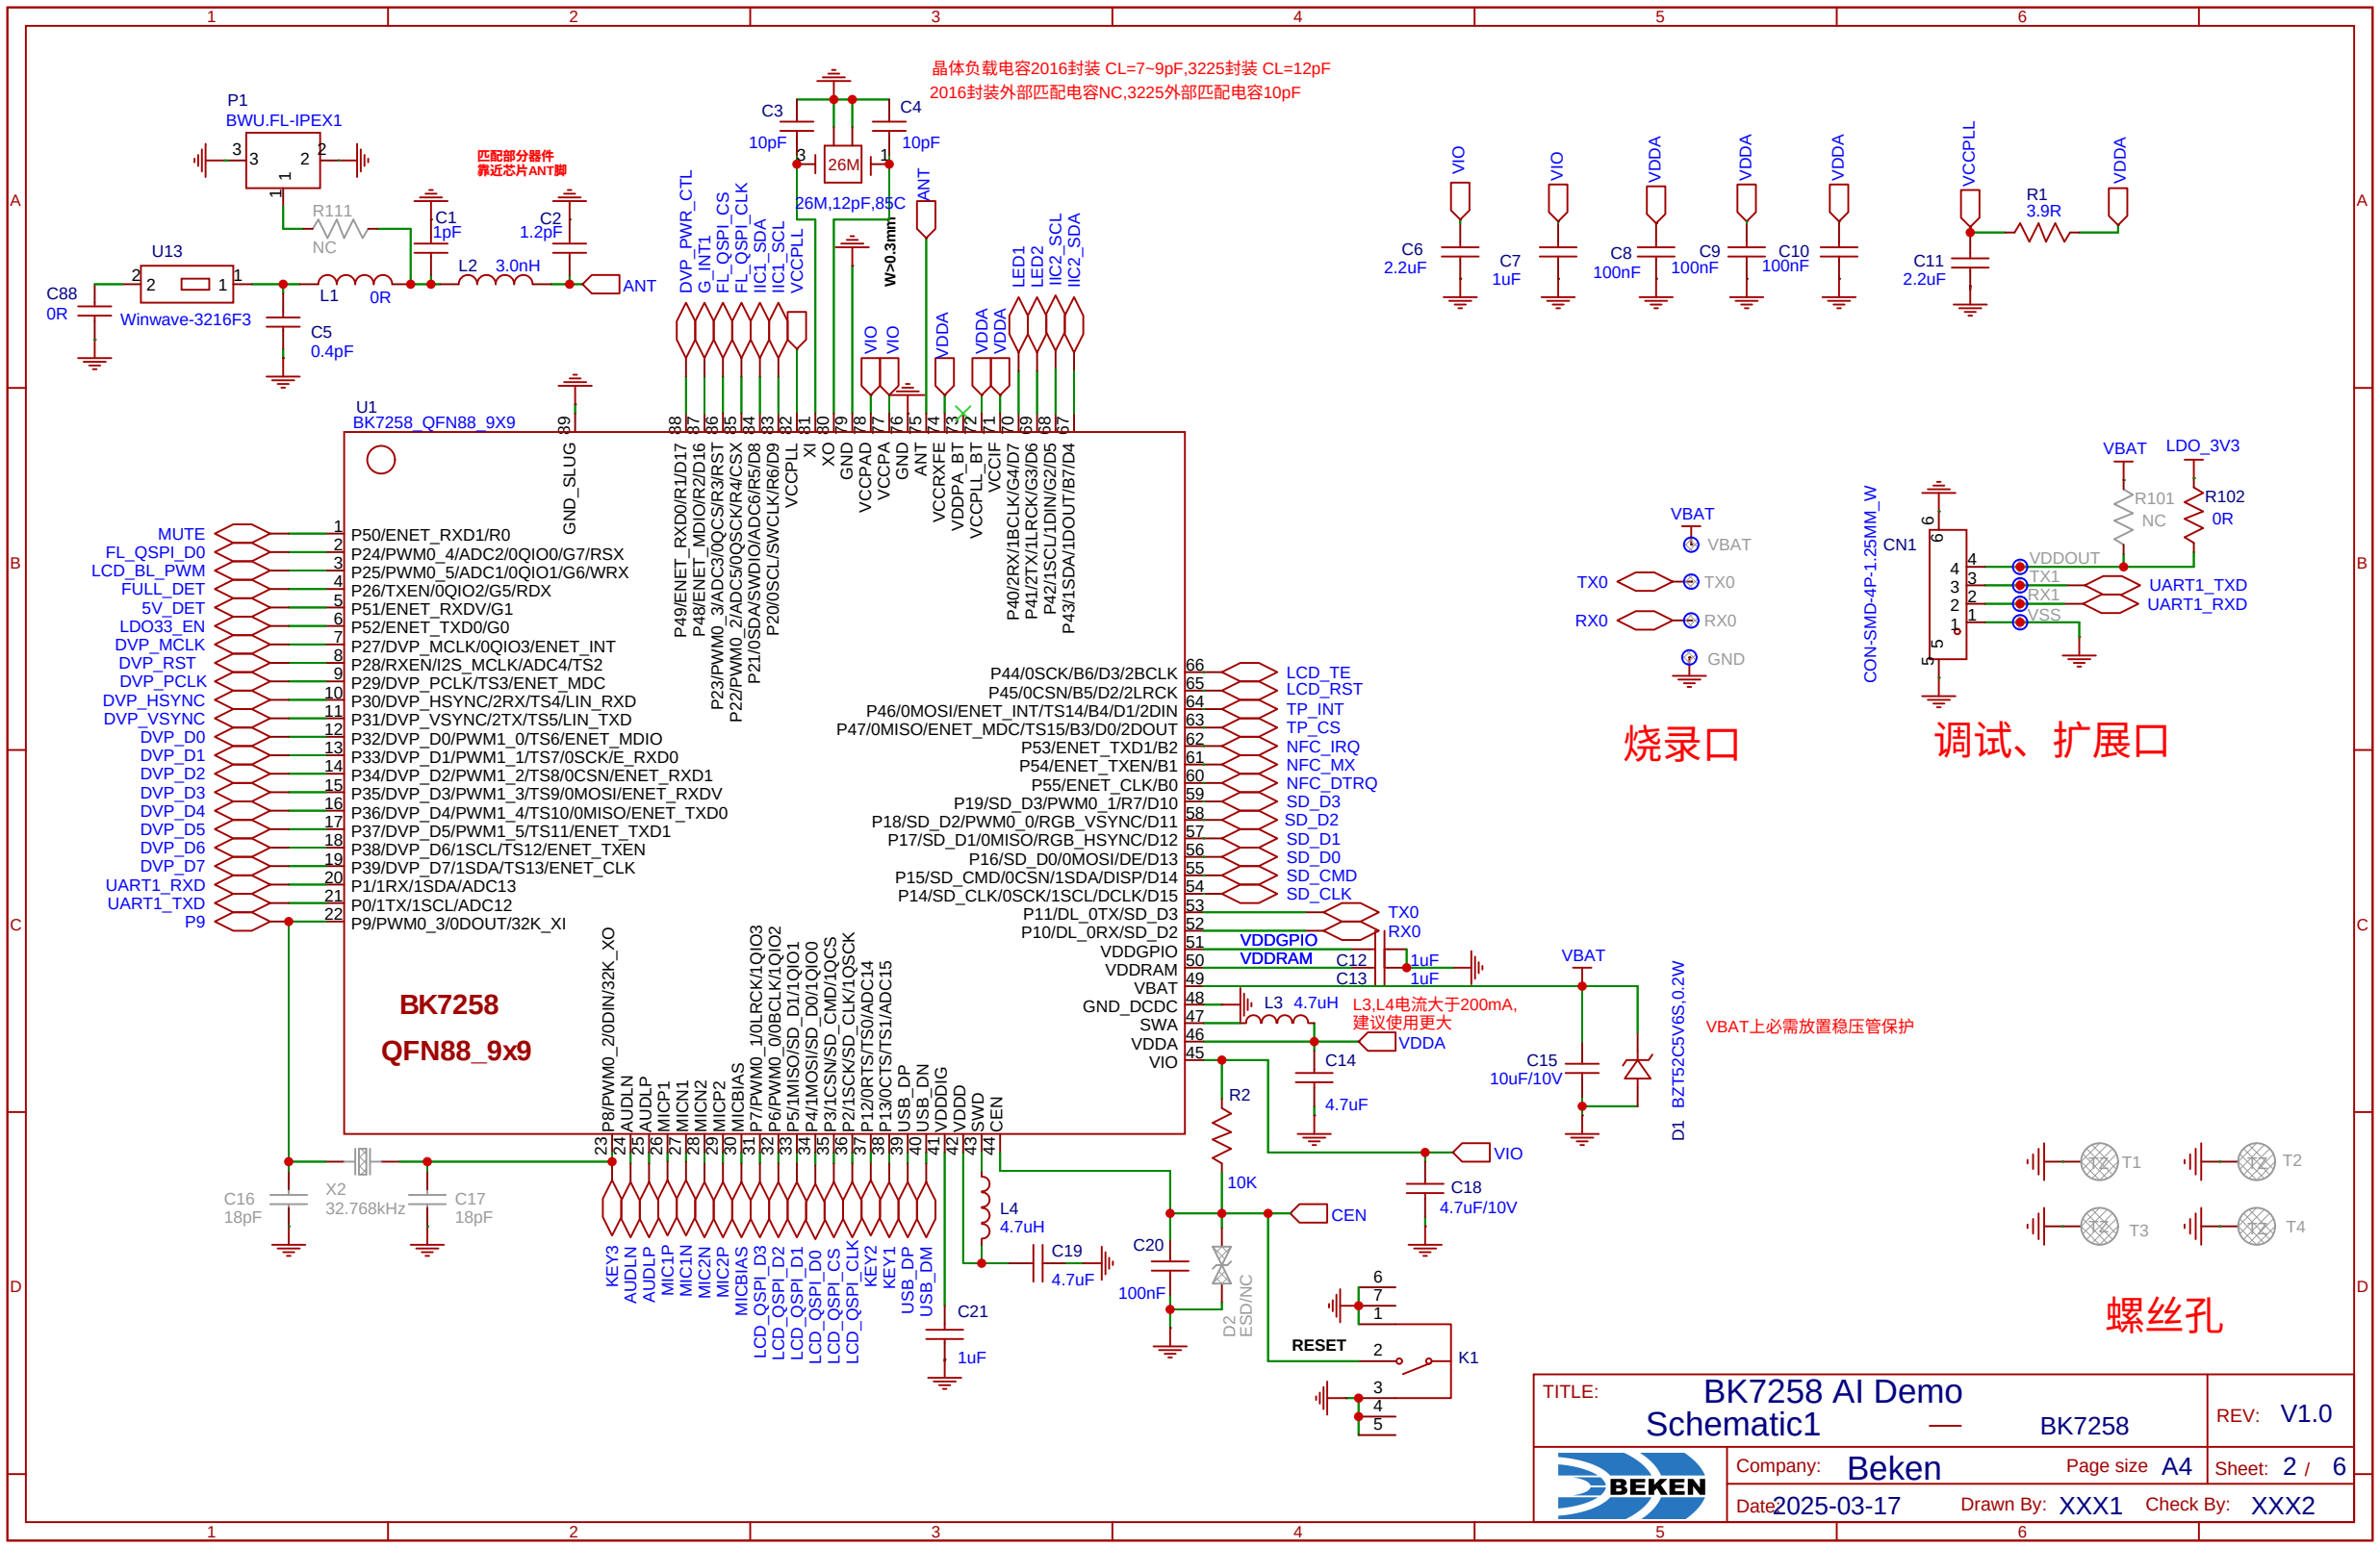


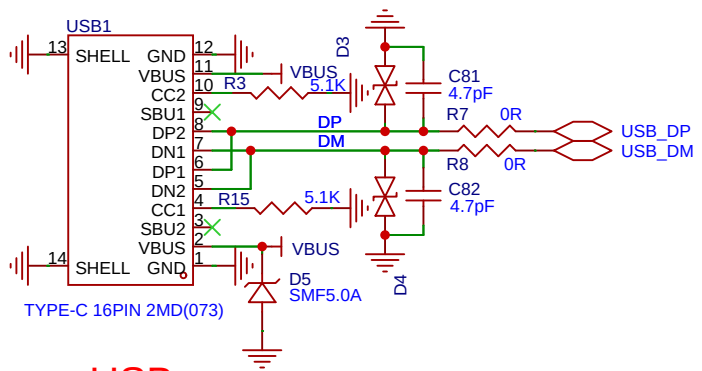


USB

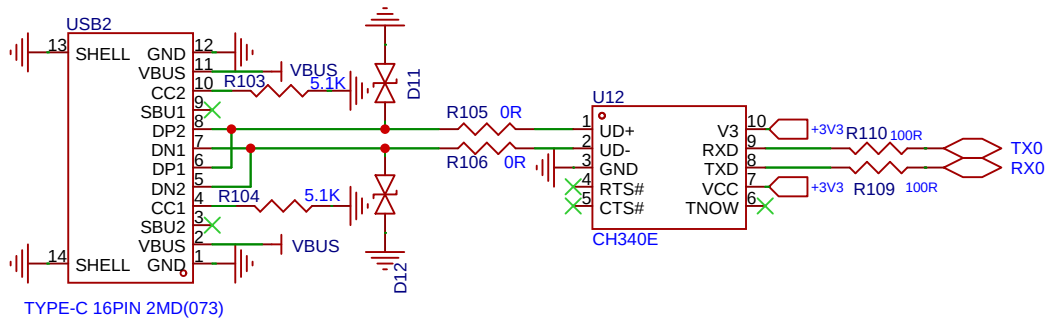


USB TO UART

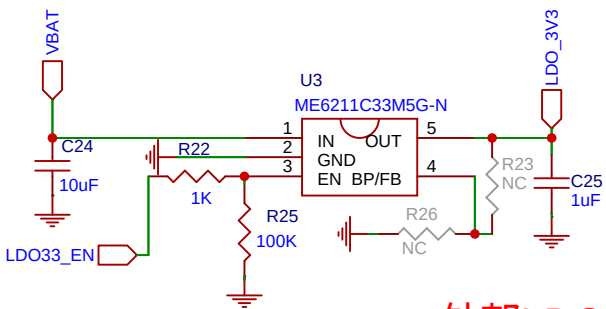

外部LDO

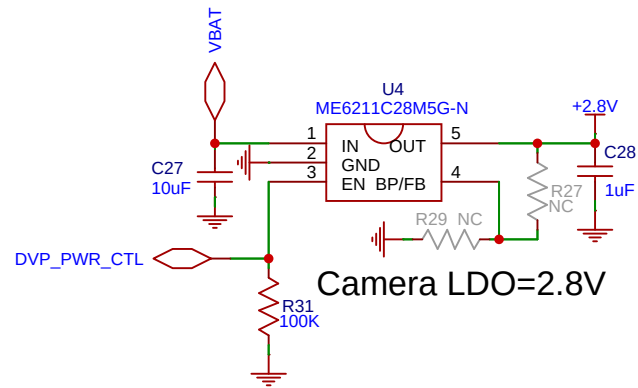


Camera LDO=2.8V


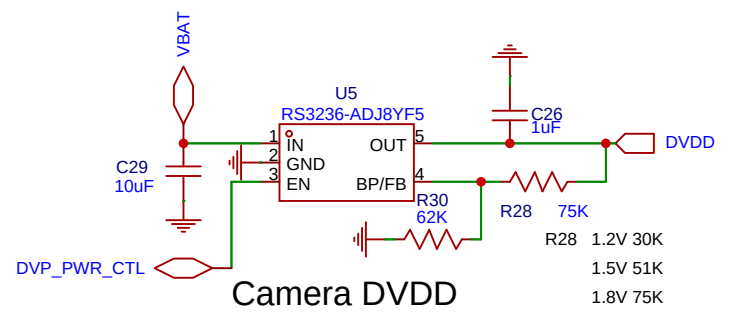


Camera DVDD





$V_o = (R_u + R_d) / R_d * 0.81$
不同DVP模块用不同DVDD

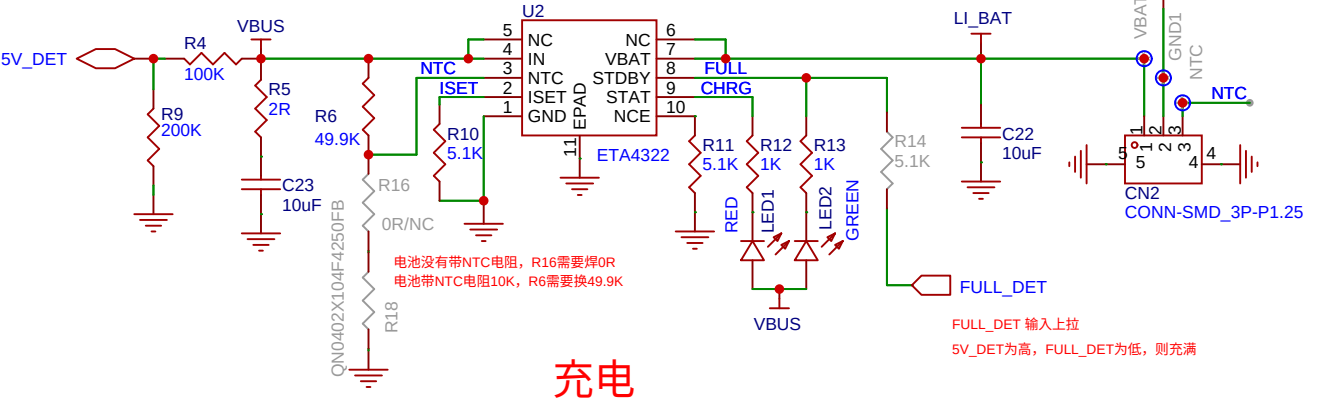


充电

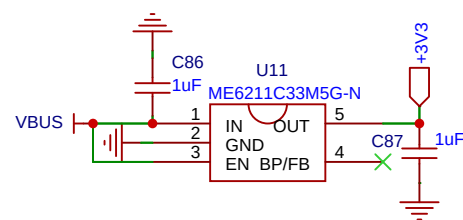


5V直供电路

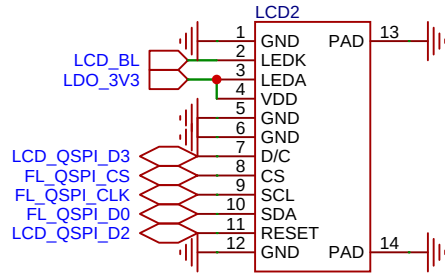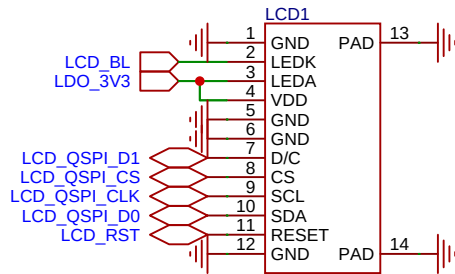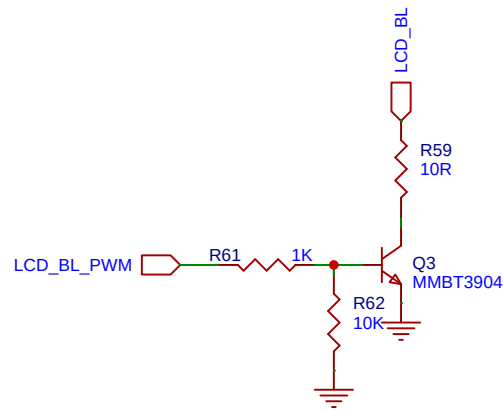


双屏

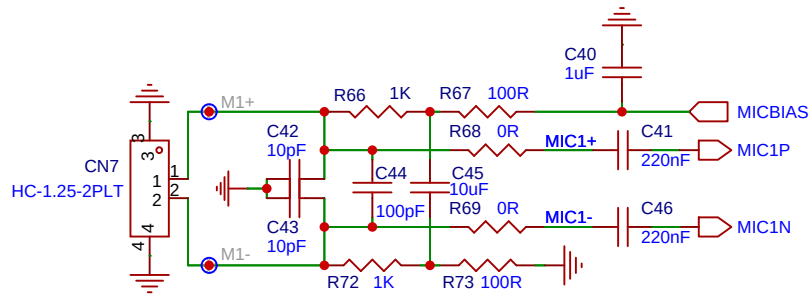



MIC推荐型号：AM_065200-GML020

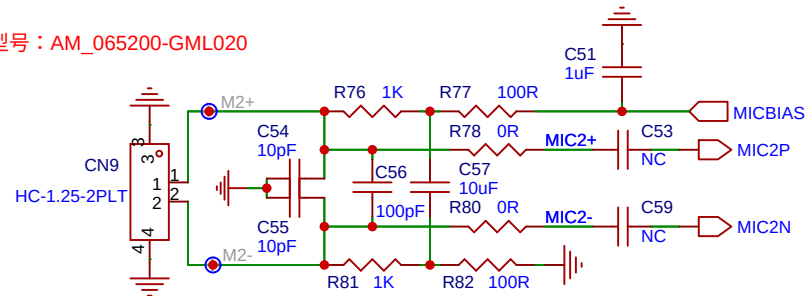

麦克风

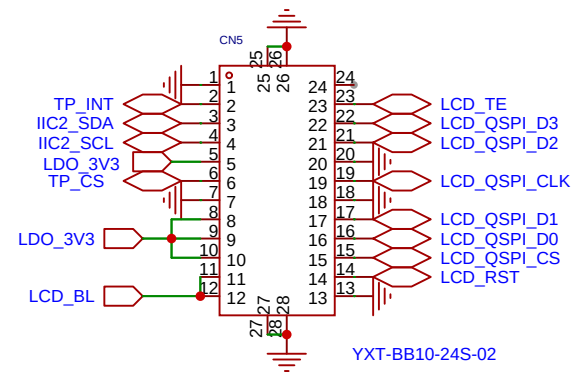


单屏

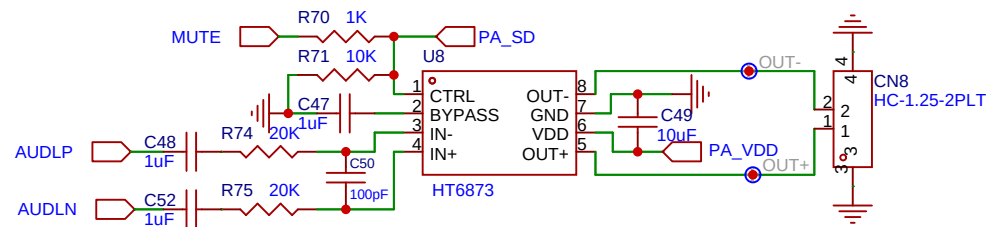


喇叭

AEC需要增加回采电路,R83,R84阻值根据输出音量做适当调整

TITLE: BK7258 AI Demo Schematic1		LCD/AUDIO		REV: V1.0
Company: Beken		Page size: A4	Sheet: 5 / 6	
Date: 2025-03-17		Drawn By: XXX1	Check By: XXX2	

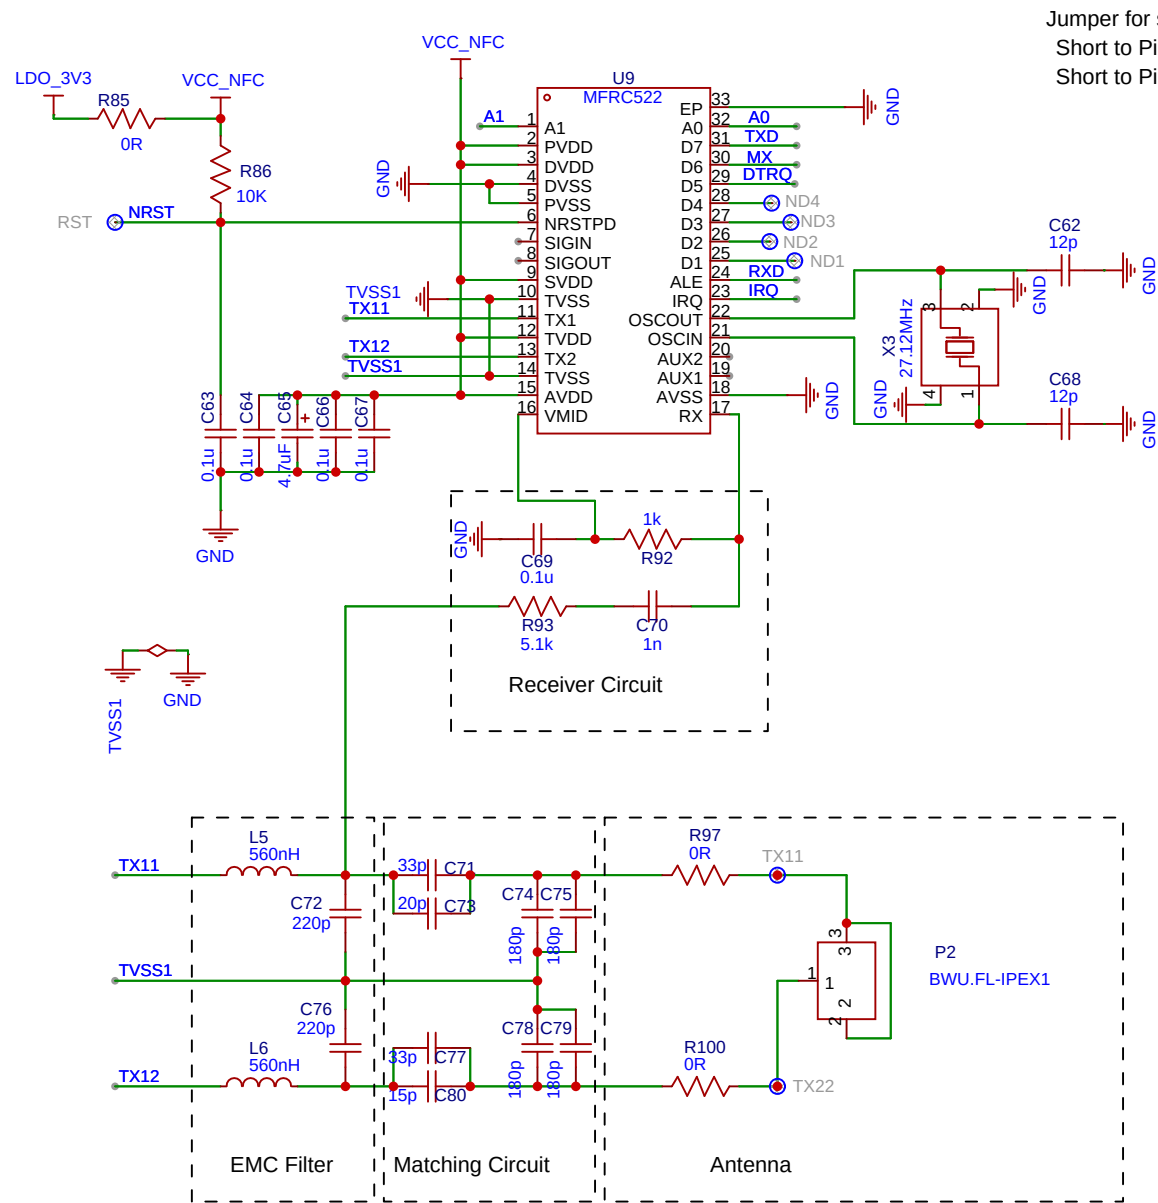

Jumper for selecting UART port or I2C port
Short to Pin1 output I2C protocol
Short to Pin3 output UART protocol



默认Uart接口

	UATR	SPI	IIC
A1	0	0	1
A0	0	1	EA

