

=====

- CPU: Allwinner V3s (ARM Cortex-A7 @ 1.2GHz)
- RAM: 64MB DDR2 @ 400MHz (Integrated SiP)
- STORAGE: SD Interface for OS (SDIO compatible)

- ETHERNET: 100Mbps Interface
- WIRELESS: WiFi & Bluetooth (via ESP32)
- LONG RANGE: LoRa support (via Ra-02)
- USB: USB Host/OTG support
- DEBUG: System UARTs to USB bridge

- CAMERA: MIPI CSI (22-pin connector)
- LCD: RGB-666 Interface with backlight support (40-pin)

- MOTION: MPU6050 Accelerometer & Gyroscope
- ENVIRONMENT: BME280 Sensor (Temp/Press/Hum)
- AUDIO: 3.5mm Audio Jack
- INPUT: Low-resolution ADC for button matrix
- VISUAL: PCB RGB backlight

- REGULATION: DC-DC converters for 3.3V, 1.8V, 1.2V
- OPERATING SYSTEM: Powered by custom Mainline Linux

File: power.kicad_sch

File: connections.kicad_sch

File: cpu.kicad_sch




File: peripherals.kicad_sch

- MountingHole H2
- MountingHole H1

Sheet: /
File: V3sDevBoard.kicad_sch

Size: A4	Date: 2025/2026
KiCad E.D.A. 9.0.6	

Rev: A
Id: 1/5

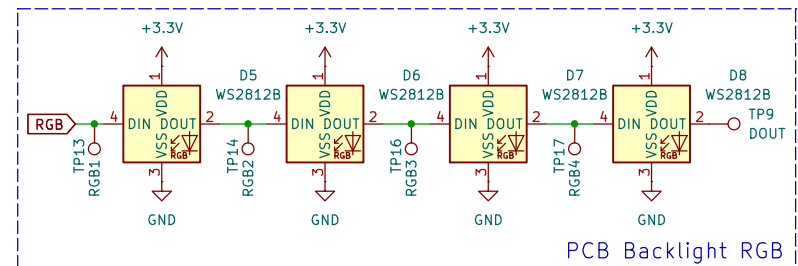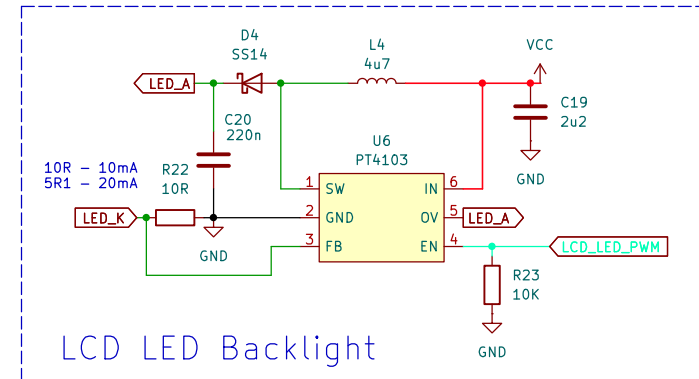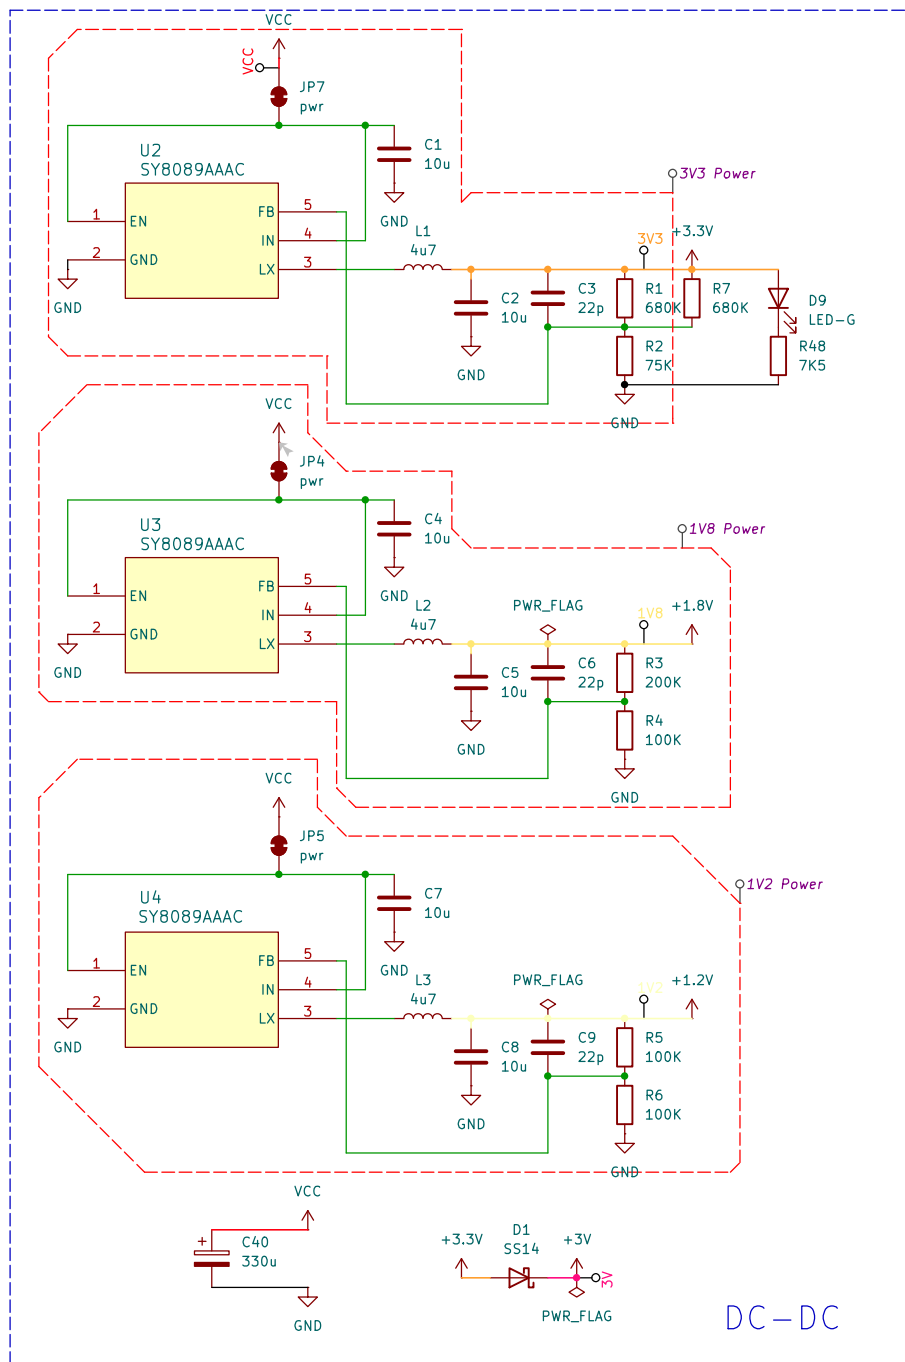

jakub.kmiecik@protonmail.com

Sheet: /Power/
File: power.kicad_sch









Title: V3s_Dev_Board

Size: A4 Date: 2025/2026

KiCad E.D.A. 9.0.6

Rev: A

Id: 3/5

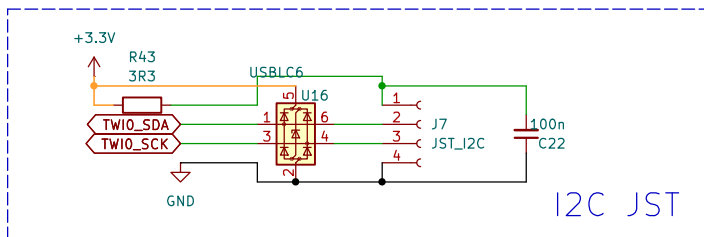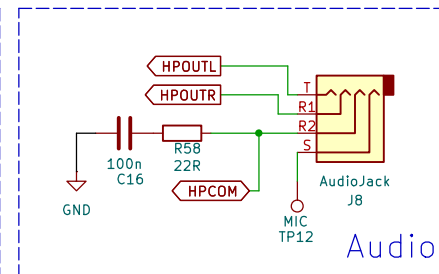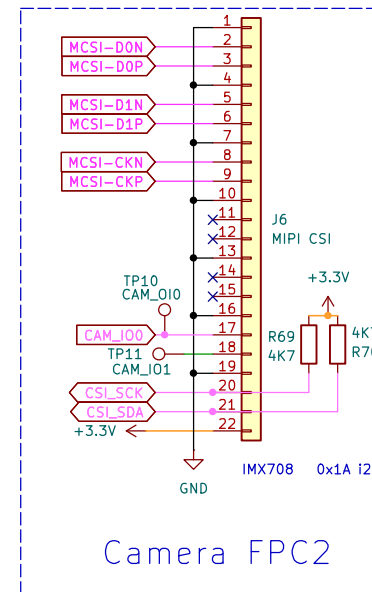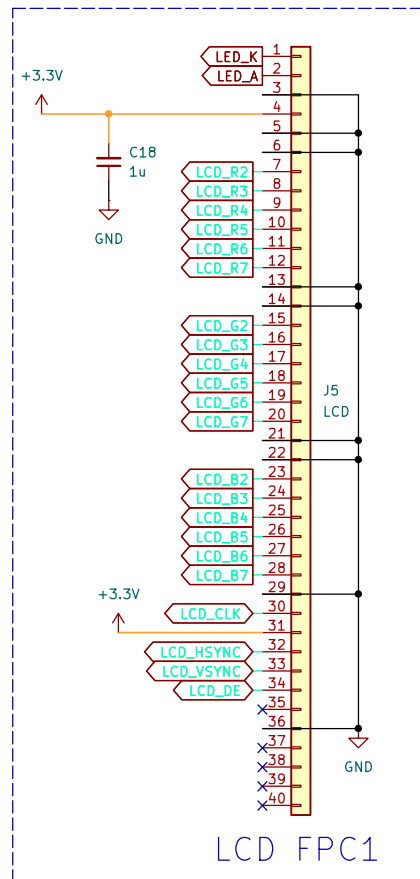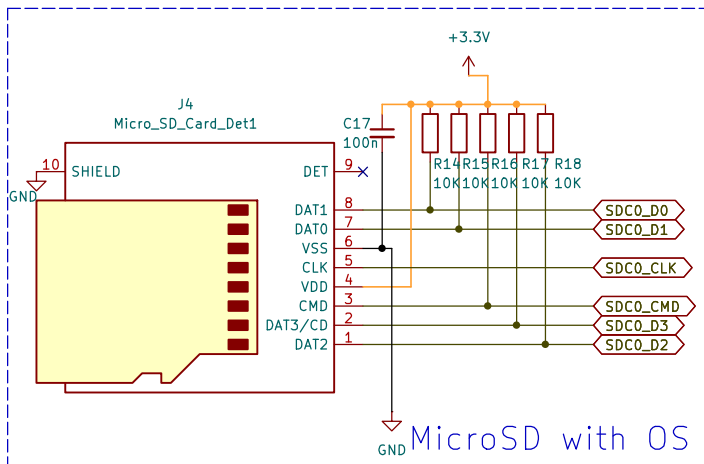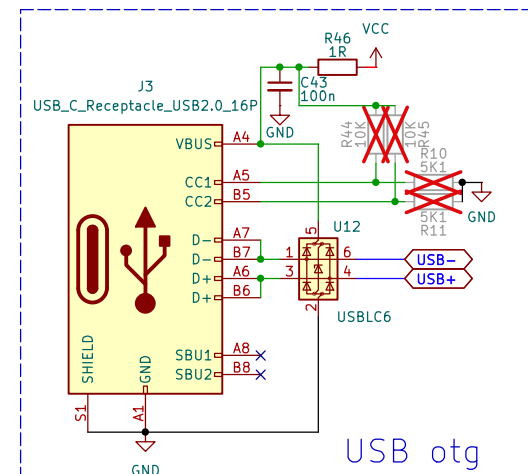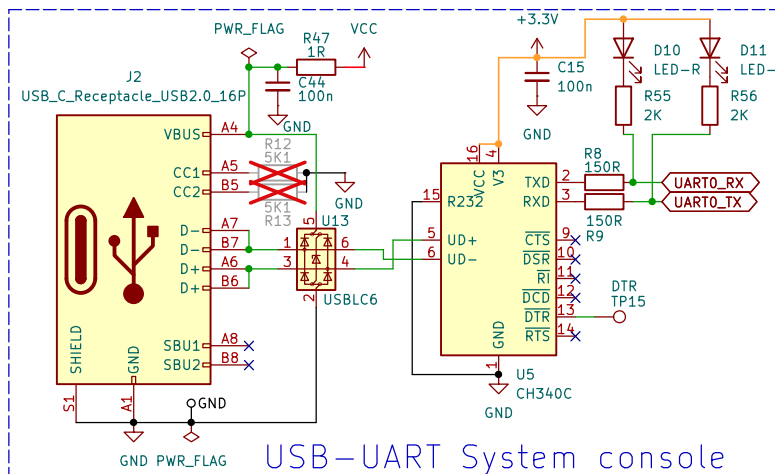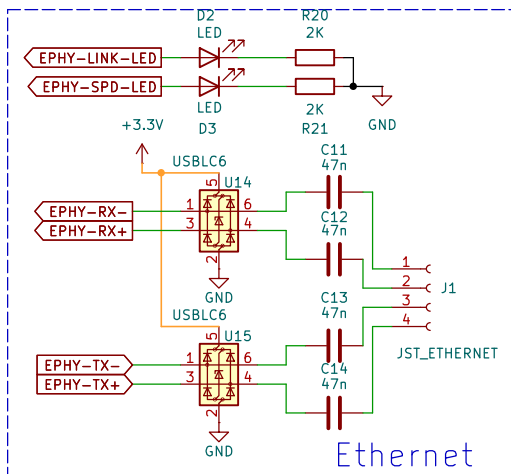

Do weryfikacji pinout







jakub.kmiecik@protonmail.com

Sheet: /Connections/
File: connections.kicad_sch

Title: V3s_Dev_Board

Size: A4 Date: 2025/2026
KiCad E.D.A. 9.0.6

Rev: A
Id: 4/5

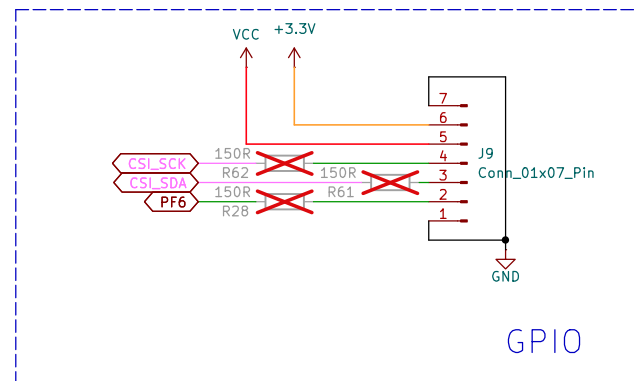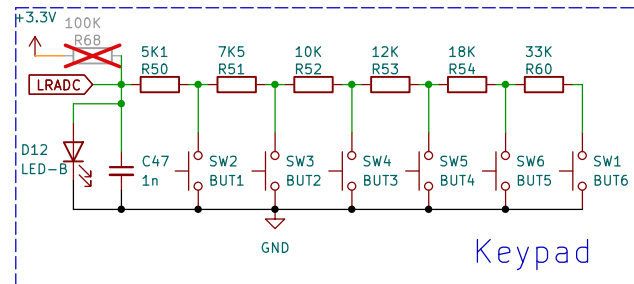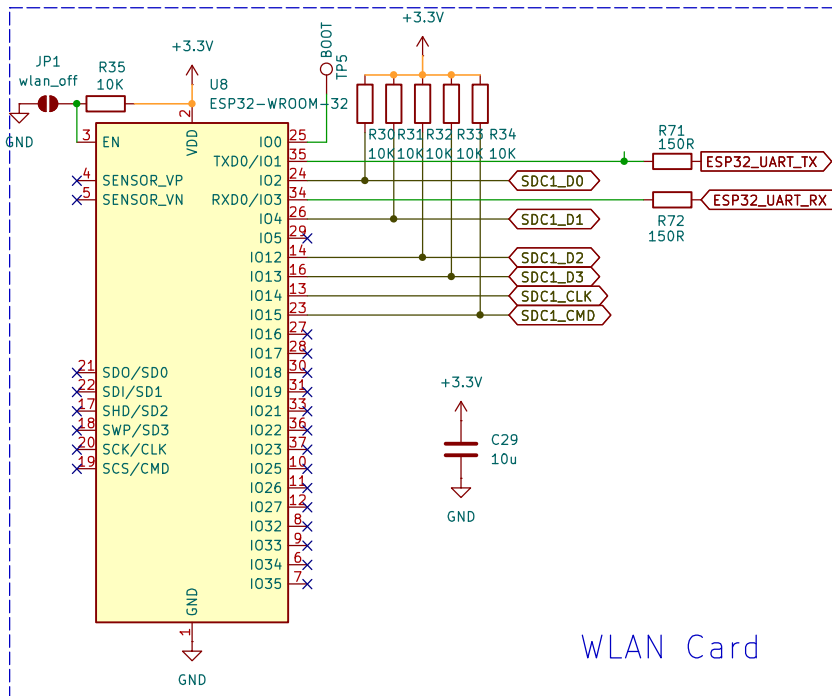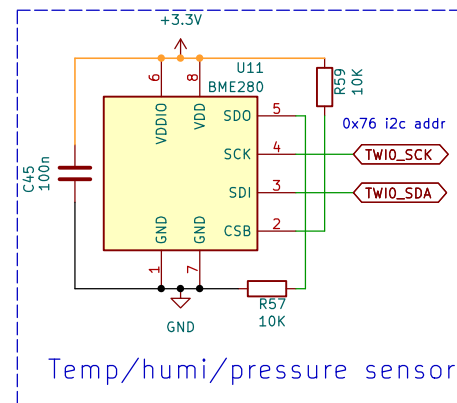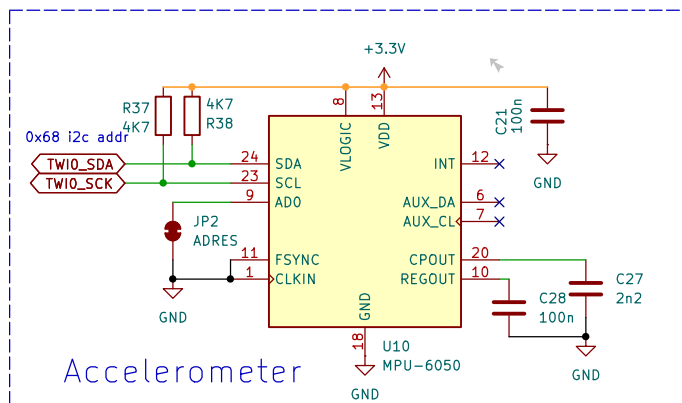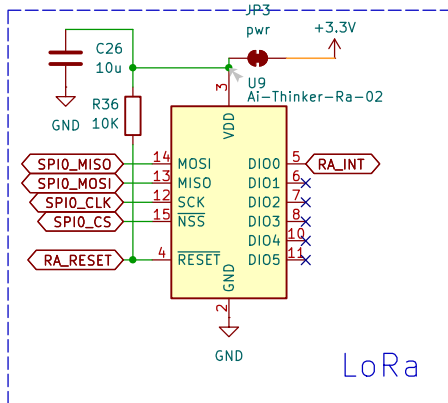

jakub.kmiecik@protonmail.com

Sheet: /Peripherals/
File: peripherals.kicad_sch

Title: V3s_Dev_Board

Size: A4 Date: 2025/2026

KiCad E.D.A. 9.0.6

Rev: A

Id: 5/5