

복사전달 특강

Special Topics in Radiative Transfer

Lecture 6

2026 April 7 (Tuesday), 1PM

updated on 04/07

선광일 (Kwangil Seon)

KASI / UST

Chapter 2

Sampling Techniques

Random Number Generation · Inversion Methods · Rejection Sampling
Normal Distribution · Algorithm Testing

2.1 Uniform Distribution & Pseudorandom Numbers

Multiplicative Congruential Algorithm

$$x_{i+1} = (a \cdot x_i + c) \bmod m$$

$$\gamma_{i+1} = \frac{x_{i+1}}{m}$$

Parameters:

a = multiplier

m = modulus

x_0 = seed

$$a = 1103515245$$

$$c = 12345$$

$$m = 2^{31}$$

All three parameters are positive integers.

Key Properties

- Generates $\gamma \in (0,1)$
- Deterministic (reproducible with same seed)
- Finite period — modern generators have very long periods
- Seed can be set randomly (e.g. system clock)
- For further reading: Fishman (1996)

Sample from Uniform(a, b)

Problem: generate $\xi \sim \text{Uniform}(a, b)$

1. Generate γ
2. $\xi = (b - a)\gamma + a$

Uniform Point in 3D Rectangular Box

Box: $[x_a, x_b] \times [y_a, y_b] \times [z_a, z_b]$

Generate $\gamma \rightarrow \xi = (x_b - x_a)\gamma + x_a$

Generate $\gamma \rightarrow \eta = (y_b - y_a)\gamma + y_a$

Generate $\gamma \rightarrow \zeta = (z_b - z_a)\gamma + z_a$

The algorithm uses three different and statistically independent γ s.

2.2 The Inversion Method for Continuous Distributions

Problem: Generate a random number ξ that has a continuous distribution $f(x)$.

Groundwork:

Find CDF of $f(x)$: $F(x) = \int_{-\infty}^x f(x')dx'$

Steps:

1. Generate a uniform random number γ :
 $\gamma \in (0,1)$
2. Solve $\gamma = F(\xi)$ for ξ
 $\rightarrow \xi = F^{-1}(\gamma)$

Proof

By definition,


$$F(x) = P(\xi \leq x) = P\{F^{-1}(\gamma) \leq x\}$$

Because $F(x)$ is monotonic,

$$\begin{aligned} &= P\{F[F^{-1}(\gamma)] \leq F(x)\} \\ &= P\{\gamma \leq F(x)\} \end{aligned}$$

This proves that the algorithm samples ξ correctly.

CDF Inversion

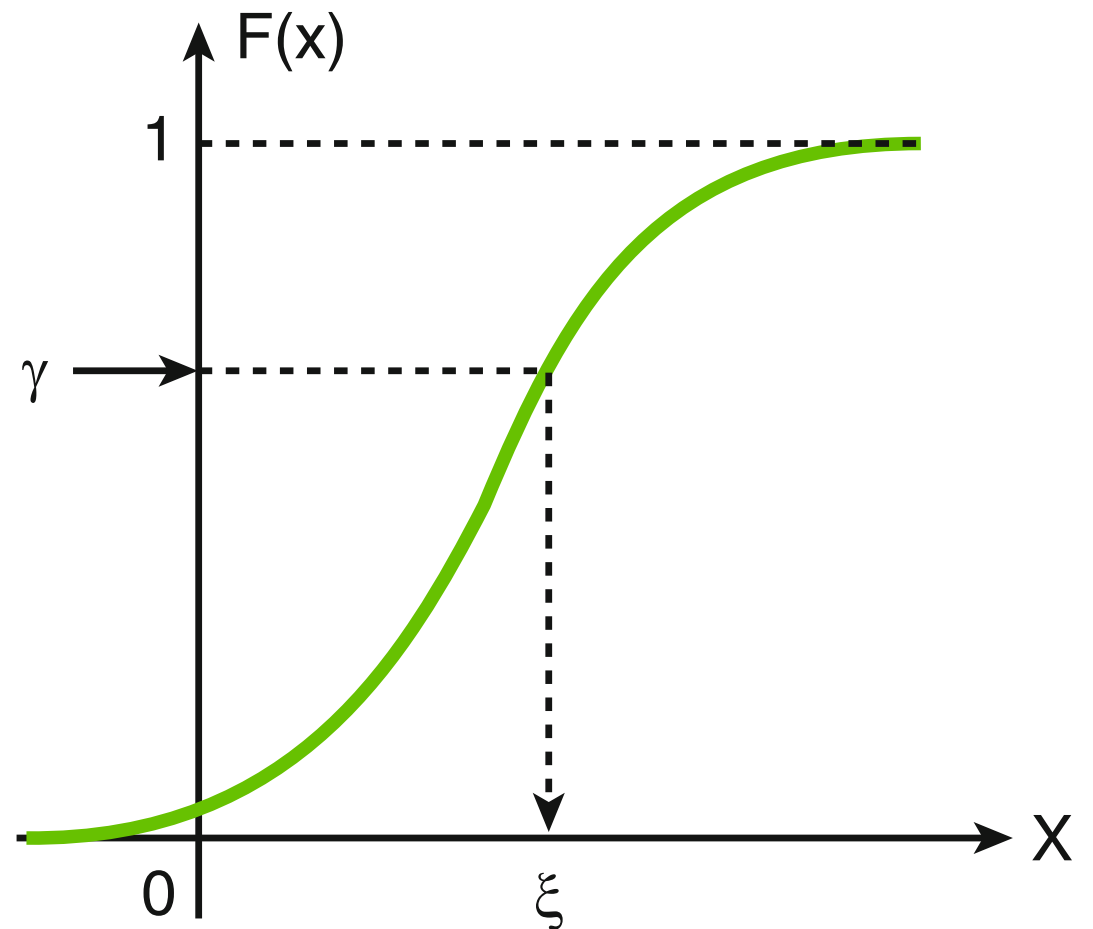

2.2

Example Applications


Ex 1: Chord-Length Distribution

A parallel beam of particles is incident on a sphere of unit diameter. Each particle entering the sphere travels a random path ξ (chord) within it.

Assume that the particles travel along a straight line, and do not stop within the sphere, the chord-length distribution is given by this simple formula:

$$f(x) = \begin{cases} 2x, & \text{if } 0 \leq x \leq 1 \\ 0, & \text{otherwise} \end{cases}$$

Here, $x = \ell/(2R)$.

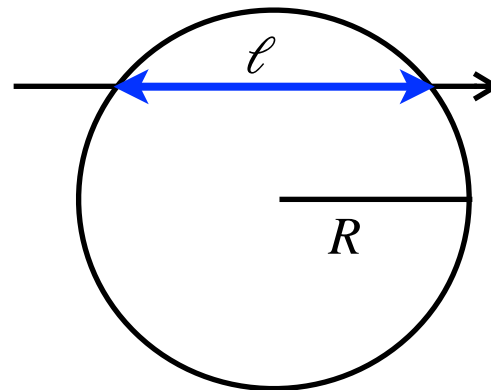

$$F(x) = x^2 \quad \text{for } 0 \leq x \leq 1$$

Algorithm:

1. Generate γ
2. $\xi = \sqrt{\gamma}$

Ex 2: Free Path (Exponential)

Particles travel along a straight line between points of interaction with matter. The distance between interactions is called a free path. It is distributed exponentially:

$$f(x) = \begin{cases} \sigma \exp(-\sigma x), & \text{if } x \geq 0 \\ 0, & \text{if } x < 0 \end{cases}$$

Here, σ is the optical depth per unit length (cm^{-1}) and x is the distance (cm).

$$F(x) = 1 - \exp(-\sigma x)$$

Algorithm:

1. Generate γ
2. $\xi = -(1/\sigma)\ln \gamma$

2.3 The Inversion Method for Sampling Discrete Distributions

Discrete CDF Inversion

- For discrete random numbers $\{x_1, x_2, \dots\}$, the CDF is a stepwise-constant function
- Example — die roll:
 $x_k = k$, and $f(k) = 1/6$ for $k = 1, \dots, 6$
 $F(k) = k/6$

Generic Algorithm:

- $k = 1$
Sample γ ; $\delta = \gamma$
- Compute P_k ; $\delta = \delta - P_k$
- If $\delta \leq 0 \rightarrow$ output $\xi = x_k$, exit
Else $k \Rightarrow k + 1$; repeat

Useful Recurrence Relations:


Binomial:

$$P_{k+1} = \frac{n-k}{k+1} \frac{p}{1-p} P_k; \quad P_0 = (1-p)^n; \quad k = 0, 1, \dots$$


Poisson:

$$P_{k+1} = \frac{\mu}{k+1} P_k; \quad P_0 = \exp(-\mu); \quad k = 0, 1, \dots$$

Inversion of the CDF for one roll of a die

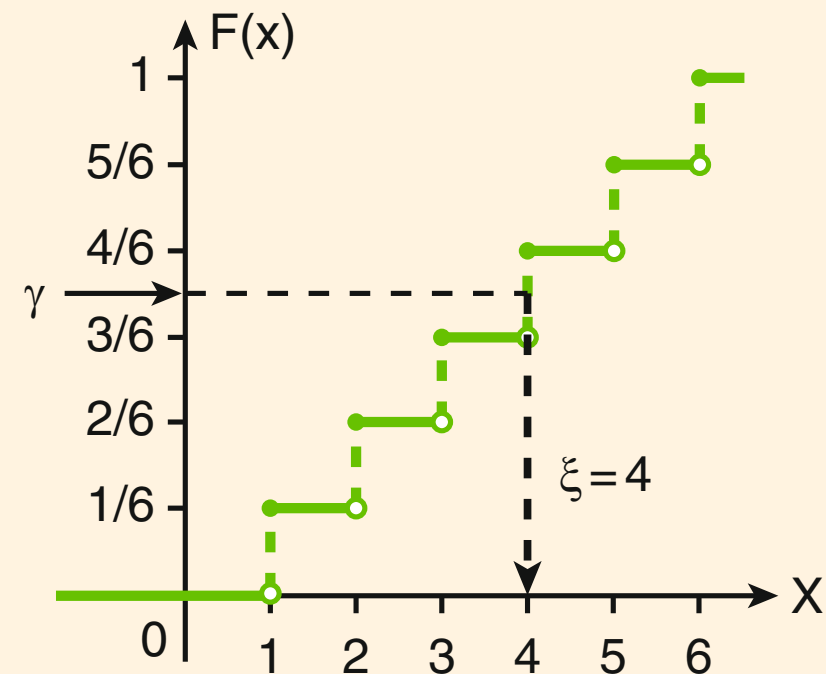

Algorithm

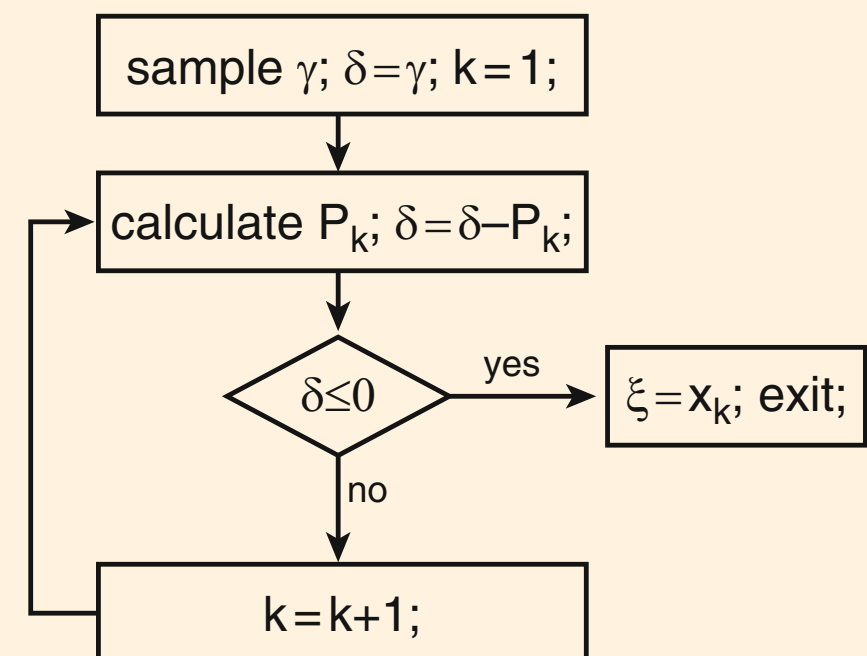

2.3

Numerical Inversion

- The inversion transformation techniques is not always feasible.
- However, even if determining the cumulative distribution function is analytically challenging, it can be done by means of numerical integration and values for $F(x)$ pre-calculated for a number of monotonically increasing x_i .

Algorithm

- Pre-calculate the cumulative distribution function $F(x_i)$ values for a number of monotonically increasing x_i .
- Once these values, $F(x_i)$, are available, the distribution can be sampled by first selecting a grid interval $[x_i, x_{i+1}]$ according to

$$i = \max\{j; F(x_j) \leq \gamma\}$$

- Since γ now lies between $F(x_i)$ and $F(x_{i+1})$, the final sampling is performed by linear interpolation

$$x = x_{i+1} - \frac{F(x_{i+1}) - \gamma}{F(x_{i+1}) - F(x_i)}(x_{i+1} - x_i)$$

2.4 Simple Rejection Method

The CDF inversion method is not always applicable to every distribution, nor is it necessarily the fastest or simplest method. The rejection method is a good alternative that offers a very straightforward algorithm.


- Find minimum bounding box for $f(x)$ (the red box)
- Place random point uniformly in box
- Accept if point falls below $f(x)$ curve

Algorithm:

1. Sample $\xi \sim \text{Uniform}[x_{\min}, x_{\max}]$
2. Sample $\eta \sim \text{Uniform}[0, \max f(x)]$
3. If $\eta < f(\xi) \rightarrow \text{ACCEPT } \xi$
Else $\rightarrow \text{REJECT, repeat}$

The efficiency of the algorithm, defined as the probability of accepting a point, is

Efficiency = Area under $f(x)$ / Box area

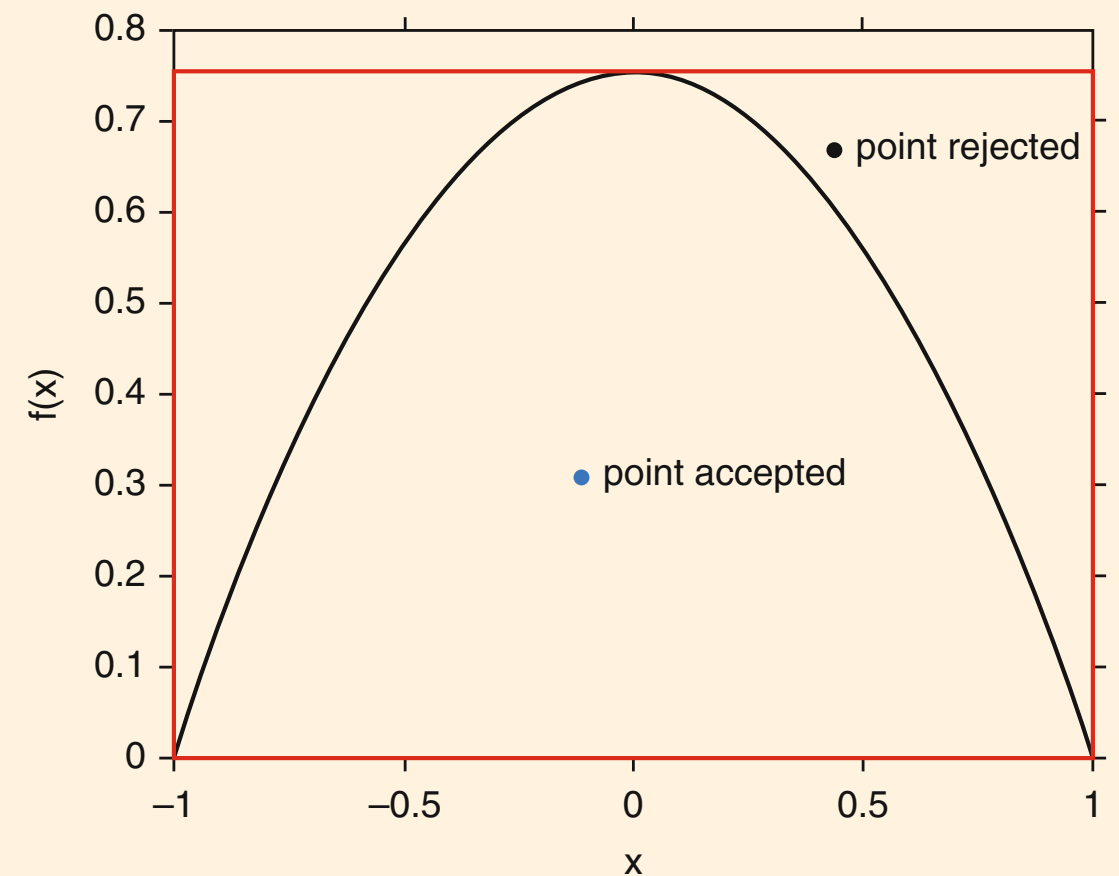

Example:

$$f(x) = (3/4)(1 - x^2) \text{ for } -1 \leq x \leq 1$$

- (1) Sample ξ uniformly within $[-1, 1]$, and η uniformly within $[0, 3/4]$.
- (2) If $\eta > (3/4)(1 - \xi^2)$, then the point is rejected, go back to step 1.
Else, the point is accepted; output ξ .

$$\text{Efficiency} = 2/3 \approx 66.7\%$$

2.5 Neumann's Method (Rejection with Proposal Distribution)

Algorithm Setup

Choose proposal $g(x)$ such that:

- (a) $g(x)$ is similar to $f(x)$
- (b) $g(x)$ is easy to sample
- (c) A number $C \geq 1$ exists such that $Cg(x) \geq f(x)$ for all x
→ Choose $g(x)$ with the smallest C .


Algorithm Steps:

1. Sample ξ from $g(x)$
2. Generate a uniformly-random number γ
3. If $\gamma \leq f(\xi)/[C \times g(\xi)]$
→ output ξ and exit
Else → go back to step 1

$$\text{Efficiency} = \text{Area under } f(x) / \text{Area under } C \cdot g(x) \\ = 1/C$$

If $g(x) = \text{const} \rightarrow$ same as simple rejection

If $g(x) = f(x) \rightarrow C=1$, no rejection needed

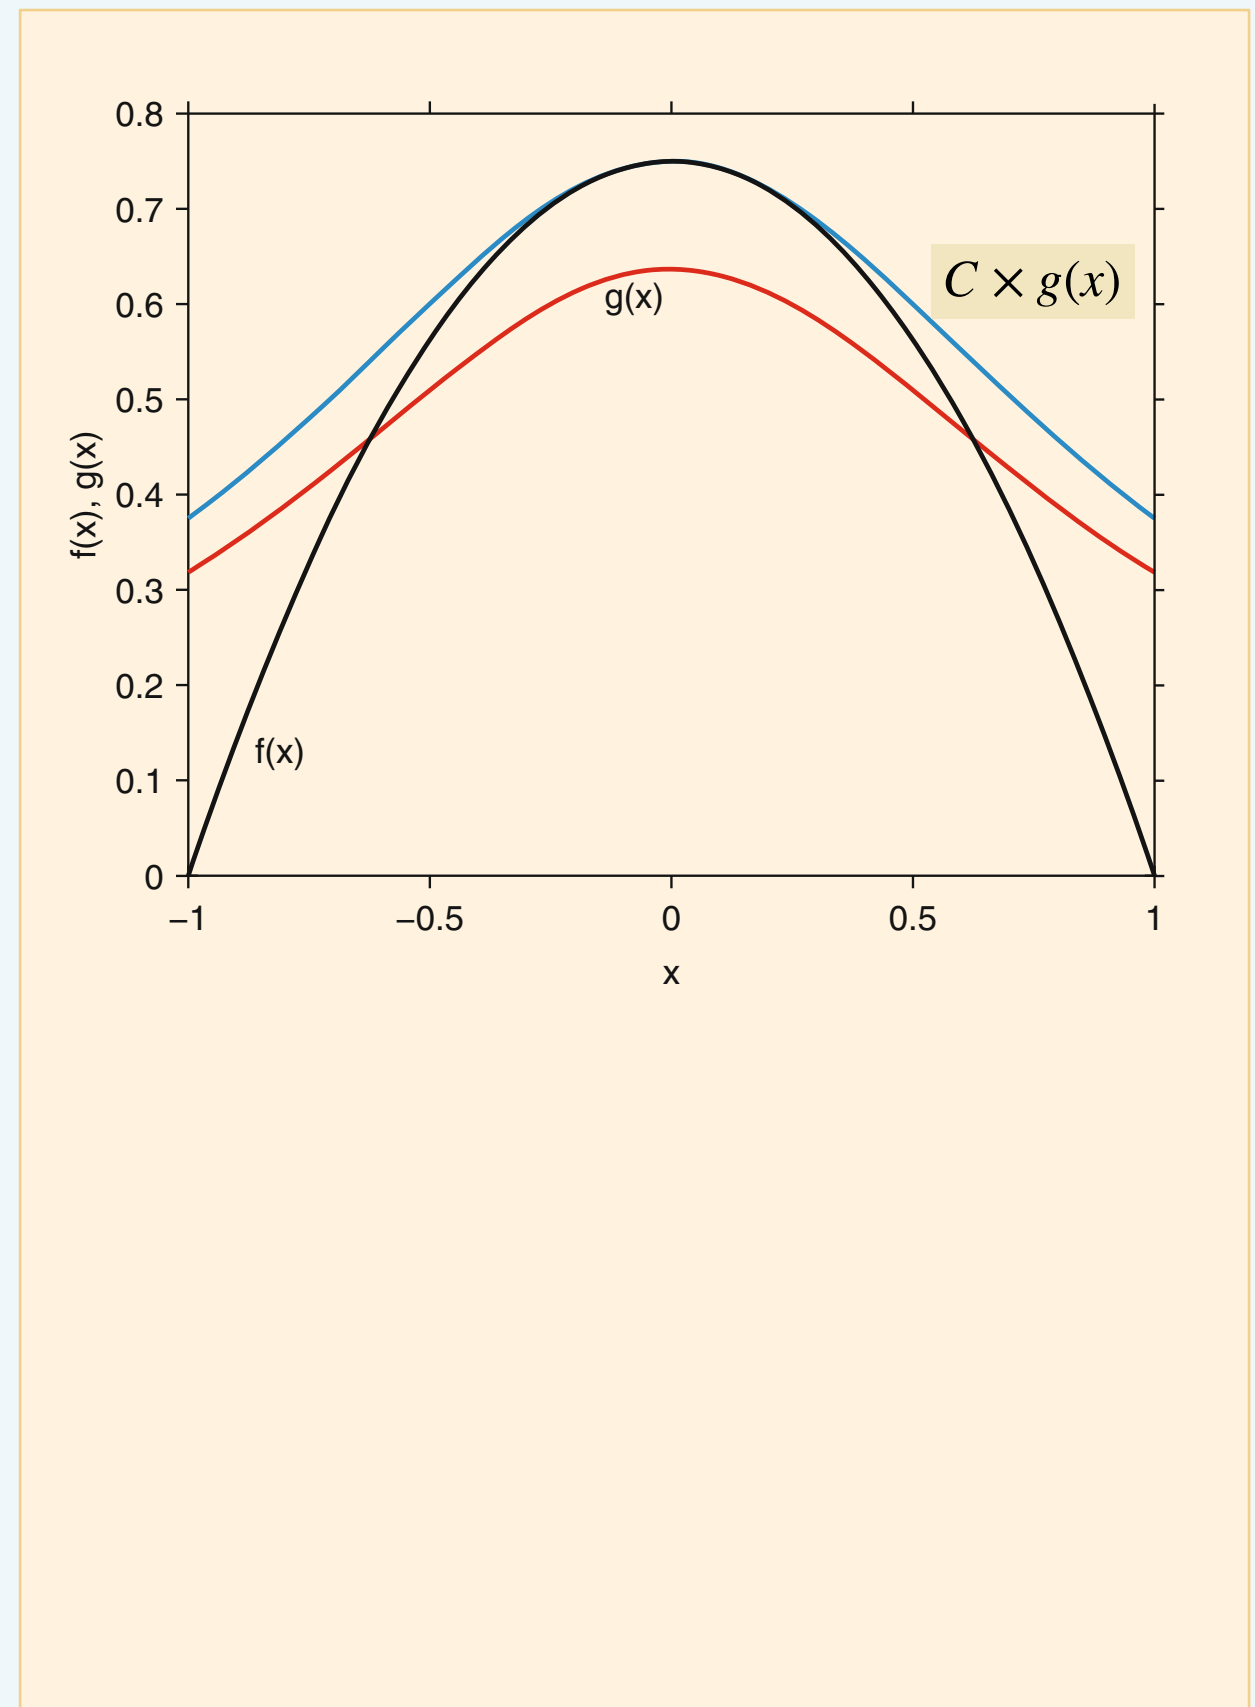

2.5 Neumann's Method (Rejection with Proposal Distribution)

Example Application

Sample from $f(x) = (3/4)(1 - x^2)$, $-1 \leq x \leq 1$

Choose proposal distribution:

$$g(x) = \frac{2}{\pi} \frac{1}{1 + x^2} \quad (\text{Cauchy})$$

$$C = 3\pi/8 \approx 1.178$$

Efficiency $\approx 85\%$

(vs 67% for simple rejection)


Sampling formula for $g(x)$:

$$\xi = \tan \left[\frac{\pi}{2} \left(\gamma - \frac{1}{2} \right) \right]$$

Acceptance test:

$$\gamma \leq f(x)/[Cg(x)] = 1 - \xi^4$$

Note: $\sin^2\vartheta$ cancels out elegantly in the acceptance condition for this specific $f(x)$ and $g(x)$ pair.

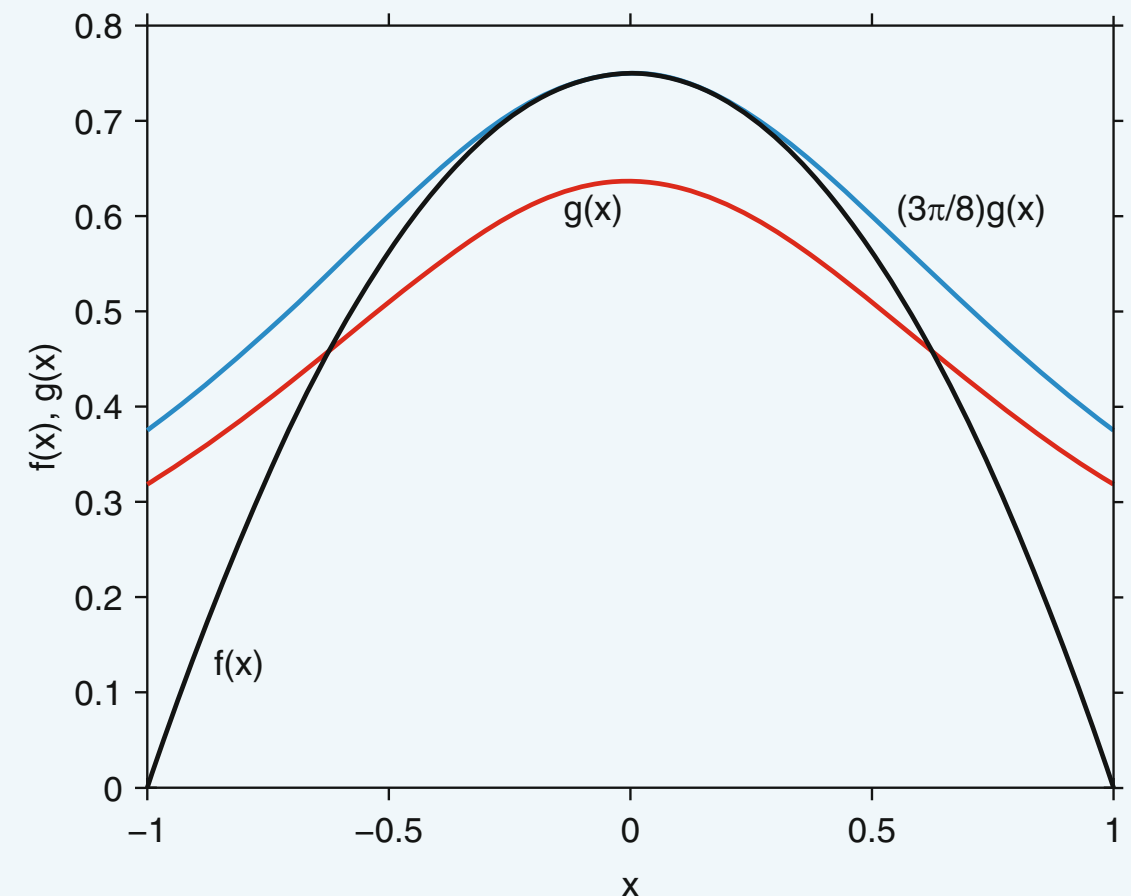

2.6 Variable Transformation

It may be possible to transform a random variable ξ into another variable $\eta = g(\xi)$ that has a distribution that is easier to sample.

Then, first sample η and then perform the inverse transformation $\xi = g^{-1}(\eta)$.

$$g_{\eta}(y) = f_{\xi}(x) \left| \frac{dx}{dy} \right| = \frac{f_{\xi}(x)}{\left| dg(x)/dx \right|}$$

The right-hand side should be expressed as a function of y using $x = g^{-1}(y)$.

This method is also applicable to multidimensional variables.

$$g_{\eta_1, \dots, \eta_n}(y_1, \dots, y_n) = f_{\xi_1, \dots, \xi_n}(x_1, \dots, x_n) \left| \det \left\{ \frac{\partial x_i}{\partial y_j} \right\} \right|, \quad i, j = 1, 2, \dots, n$$

Example:

Sample distribution

$$f_{\xi}(x) = 2xe^{-x^2}, \quad x \geq 0$$

Instead, we sample $\eta = \xi^2$.

The distribution of η is

$$\rightarrow g_{\eta}(y) = f_{\xi}(x) \frac{1}{2x} = e^{-y} \quad (\text{exponential!})$$

Algorithm:

1. Sample η from $\exp(-y)$ for $y \geq 0$ via the CDF inversion method:
 $\eta = -\ln(\gamma)$
2. Output $\xi = \sqrt{\eta}$

2.7 Sum of Distributions

Sample distribution

$$f(x) = \sum_i p_i f_i(x)$$

$$\text{where } p_i \geq 0, \sum_i p_i = 1, \text{ and } \int f_i(x) dx = 1$$

Algorithm:

1. Sample a channel number i from the discrete distribution given by probabilities $\{p_1, p_2, \dots\}$
2. Sample ξ from $f_i(x)$

Physical Example — Photon Interactions:

Sample states of all particles after the interaction of a photon with an atom. We have three channels:

1. $p_1 \rightarrow$ Photoelectric absorption
 - the photon is absorbed
 - a photoelectron is ejected
 - the atom is ionized
2. $p_2 \rightarrow$ Compton scattering
 - the photon momentum changes (deflected)
 - a Compton electron is ejected
 - the atom is ionized
3. $p_3 \rightarrow$ Pair production
 - the photon disappears
 - an electron and a positron are produced.

First, we sample interaction type (the channel number, 1, 2, or 3).

Once the type of interaction is determined, we sample the parameters of particles after the interaction using the distribution function for the selected interaction type.

2.8 Compton Scattering — Combined Algorithm

Klein–Nishina formula:

Sample the scattering angle and energy of a photon after Compton scattering. We consider a simple case where the photon with an energy E interacts with a free electron at rest. The probability distribution of photon energy (E') after scattering is given by

$$f(E') = A \left(\frac{E'}{E} + \frac{E}{E'} - \sin^2 \theta \right) \text{ where } \cos \theta = 1 - \frac{1}{E'} + \frac{1}{E} \Leftrightarrow E' = \frac{E}{1 + E(1 - \cos \theta)},$$

where the energies are in the units of electron rest energy, $E = \text{energy}/m_e c^2$.

The minimum and maximum E' can be found by setting $\theta = \pi$ and $\theta = 0$, respectively.

$$E'_{\min} = E/(1 + 2E); \quad E'_{\max} = E$$

Strategy (3 Methods Combined; Neumann's method + a sum of two distributions + CDF inversion)

- Decompose $f(E')$ into $Cg(E')h(E')$:

$$f(E') = A \left(\frac{E'}{E} + \frac{E}{E'} \right) \left(1 - \frac{\sin^2 \theta}{E'/E + E/E'} \right)$$

$$g(E') \propto \frac{E'}{E} + \frac{E}{E'} \quad \text{and} \quad h(E') = \left(1 - \frac{\sin^2 \theta}{E'/E + E/E'} \right) \leq 1$$

$$\Rightarrow f(E') \leq A \left(\frac{E'}{E} + \frac{E}{E'} \right) = Cg(E')$$

2.8

- Sample the proposal distribution $g(E')$:

$$Cg(E') = A \left(\frac{E'}{E} + \frac{E}{E'} \right)$$

This function can be written as

$$Cg(E') = A(\alpha_1 + \alpha_2) \left[\frac{\alpha_1}{\alpha_1 + \alpha_2} f_1(E') + \frac{\alpha_2}{\alpha_1 + \alpha_2} f_2(E') \right],$$

where

$$f_1(E') = A_1 E' \text{ and } f_2(E') = \frac{A_2}{E'}, \text{ and}$$

their normalization constants A_1 and A_2 are obtained from $A_1 \int_{E'_{\min}}^{E'_{\max}} E' dE' = 1$ and $A_2 \int_{E'_{\min}}^{E'_{\max}} \frac{dE'}{E'} = 1$.

Then, it can be determined that

$$\alpha_1 = \frac{1}{A_1 E} \text{ and } \alpha_2 = \frac{E}{A_2}$$

Now, we choose

$$g(E') = \frac{\alpha_1}{\alpha_1 + \alpha_2} f_1(E') + \frac{\alpha_2}{\alpha_1 + \alpha_2} f_2(E'), \quad \text{and} \quad C = A(\alpha_1 + \alpha_2).$$

- Sample $f_1(E')$:

$$\xi = \sqrt{(E'_{\min})^2 + 2\gamma/A_1} \quad \text{using a uniform random number } \gamma$$

- Sample $f_2(E')$:

$$\xi = E'_{\min} \exp(\gamma/A_2) \quad \text{using a uniform random number } \gamma$$

2.8

Full Algorithm Steps

1. Generate γ
2. If $\gamma < \alpha_1/(\alpha_1 + \alpha_2)$ then sample ξ from $f_1(E')$:

Generate (a new) γ

$$\xi = \sqrt{(E'_{\min})^2 + 2\gamma/A_1}$$

Else, sample ξ from $f_2(E')$

Generate (a new) γ

$$\xi = E'_{\min} \exp(\gamma/A_2)$$

3. Calculate $\sin^2 \theta = 1 - \left(1 - \frac{1}{\xi} + \frac{1}{E}\right)^2$ from
Compton energy and momentum conservation
formula

4. Generate γ

5. If $\gamma < 1 - \sin^2 \theta / (\xi/E + E/\xi)$
→ output $E' = \xi$ and θ ; exit
Else, go back to step 1

2.9 Superposition Method

Sample a probability distribution defined as an integral

$$f(x) = \int h(x, t) dt$$

Choose a normalized and simple-to-sample distribution $g(t)$, and rewrite the integral as

$$\int h(x, t) dt = \int g(t) \frac{h(x, t)}{g(t)} dt \Rightarrow \int g(t) f(x|t) dt$$

The ratio h/g can be interpreted as a conditional probability distribution. Hence, the algorithm is:

Algorithm:

1. Sample τ from distribution $g(t)$
2. Sample ξ from distribution $f(x|\tau)$

Example

Sample the following distribution:

$$f(x) = A \int_0^\infty t \exp[-t(x+t)] dt \quad (x \geq 0 \text{ and } A > 0)$$

Normalization factor:

$$\int_0^\infty f(x) dx = 1 \rightarrow A = \frac{2}{\sqrt{\pi}}$$

The integrand can be written as a product of two normalized distributions:

$$At \exp[-t(x+t)] = t \exp(-tx) \cdot \frac{2}{\sqrt{\pi}} \exp(-t^2)$$

Algorithm:

1. Sample τ from $(2/\sqrt{\pi})\exp(-t^2)$, $t \geq 0$.
This is the positive half of a normal distribution.
2. Sample ξ from $\tau \exp(-\tau x)$, $x \geq 0$. This is the exponential distribution.

2.10 Sampling the Normal Distribution $N(\mu, \sigma^2)$

$$f(x) = \frac{1}{\sqrt{2\pi\sigma^2}} \exp \left[-\frac{(x - \mu)^2}{2\sigma^2} \right] \quad \text{Approach: sample } \delta \sim N(0,1), \text{ then output } \xi = \sigma\delta + \mu$$

Method 1: Central Limit Theorem Approximation

1. Generate $\gamma_1, \gamma_2, \dots, \gamma_n$
2. Sum the n uniform random numbers:

$$\xi = \sqrt{\frac{12}{n}} \sum_{i=1}^n \left(\gamma_i - \frac{1}{2} \right)$$

$n = 12$ has been recommended.

$$\xi = \left(\sum_{i=1}^{12} \gamma_i \right) - 6$$

It is easy to show that $\text{Var}(\xi) = 1$ and $E(\xi) = 0$.

⚠ Inaccurate in distribution tails

A.14 The Central Limit Theorem

If $\xi_1, \xi_2, \dots, \xi_N$ are independent random numbers and each has an arbitrary distribution with mean μ and finite variance σ^2 , and

$$\eta = \frac{1}{N} \sum_{i=1}^N \xi_i, \quad (\text{A.44})$$

then in the limit $N \rightarrow \infty$, the distribution $f_\eta(x)$ tends to a normal distribution with $\mu_\eta = \mu$ and $\sigma_\eta = \sigma/\sqrt{N}$.

For $n = 1$, let $\xi = \eta - 1/2$:

$$f_\xi(x) = 1$$

$$\langle \xi \rangle = 0$$

$$\langle \xi^2 \rangle = \int_0^1 (x - 1/2)^2 dx = \frac{1}{12}$$

$$\therefore \sigma^2 = \langle \xi^2 \rangle - \langle \xi \rangle^2 = \frac{1}{12}$$

2.10

Method 2: Box-Muller Transform

Produces 2 independent $N(0,1)$:

1. Generate γ_1 and γ_2

2. Calculate ϕ and ρ :

$$\phi = 2\pi\gamma_1$$

$$\rho = \sqrt{-2\ln\gamma_2}$$

3. Output two samples:

$$\xi_1 = \rho \cos \phi$$

$$\xi_2 = \rho \sin \phi$$

Exact – but requires sin/cos.

This method is based on the transformation of random variables in two dimensions. Instead of one random number, we sample two independent variables, ξ_1 and ξ_2 , each having distribution $N(0,1)$. The joint probability distribution of the two variables is:

$$f(x, y) = \frac{1}{\sqrt{2\pi}} \exp\left(-\frac{x^2}{2}\right) \frac{1}{\sqrt{2\pi}} \exp\left(-\frac{y^2}{2}\right)$$

Next, we introduce new variables, ρ and ϕ , defined as


$$x = \rho \cos \phi; \quad y = \rho \sin \phi$$

and transform the joint distribution accordingly

$$f(x, y) = \frac{1}{2\pi} \exp\left(-\frac{\rho^2}{2}\right) \rho d\rho d\phi = \frac{d\phi}{2\pi} \cdot \exp\left(-\frac{\rho^2}{2}\right) d\left(\frac{\rho^2}{2}\right)$$

This result means that the joint distribution of ϕ and $\rho^2/2$ is a product of a uniform distribution and an exponential distribution:

$$f\left(\frac{\rho^2}{2}, \phi\right) = \frac{1}{2\pi} \exp\left(-\frac{\rho^2}{2}\right).$$

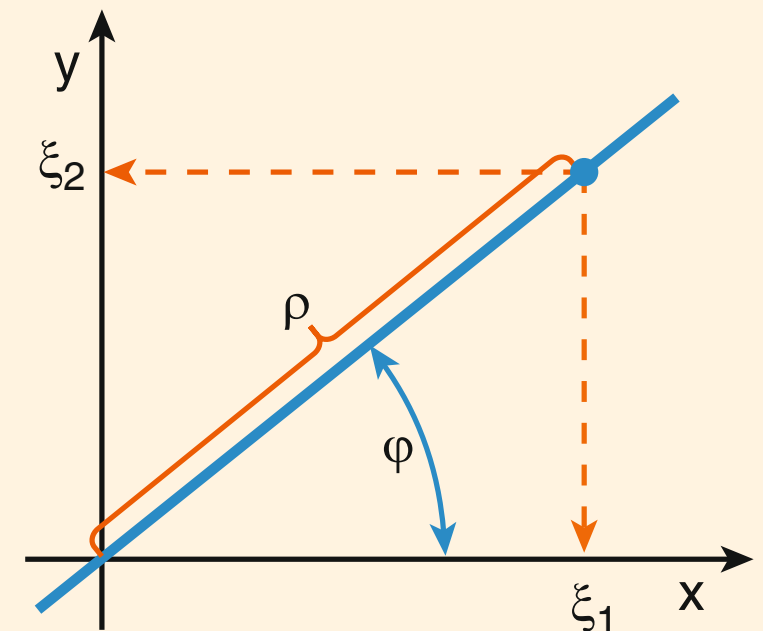

2.10

Method 3: Geometric Rejection

Avoid sin/cos computation:

1. Generate γ_1 and γ_2
2. Sample (η_1, η_2) in unit circle:

$$\eta_1 = 2\gamma_1 - 1 \text{ and } \eta_2 = 2\gamma_2 - 1$$

3. If $\alpha^2 = \eta_1^2 + \eta_2^2 > 1$, reject
4. Else the point is within the circle.


5. Generate γ_3
6. Calculate $\rho = \sqrt{-2 \ln \gamma_3}$.
(We sample $\rho^2/2$ from the exponential distribution).

7. Find x and y positions:

$$\xi_1 = \eta_1 \rho / \alpha \text{ and } \xi_2 = \eta_2 \rho / \alpha$$

Note that $\eta_1/\alpha \rightarrow \cos \phi$ and $\eta_2/\alpha \rightarrow \sin \phi$.

Efficiency = $\pi/4 \approx 78.5\%$

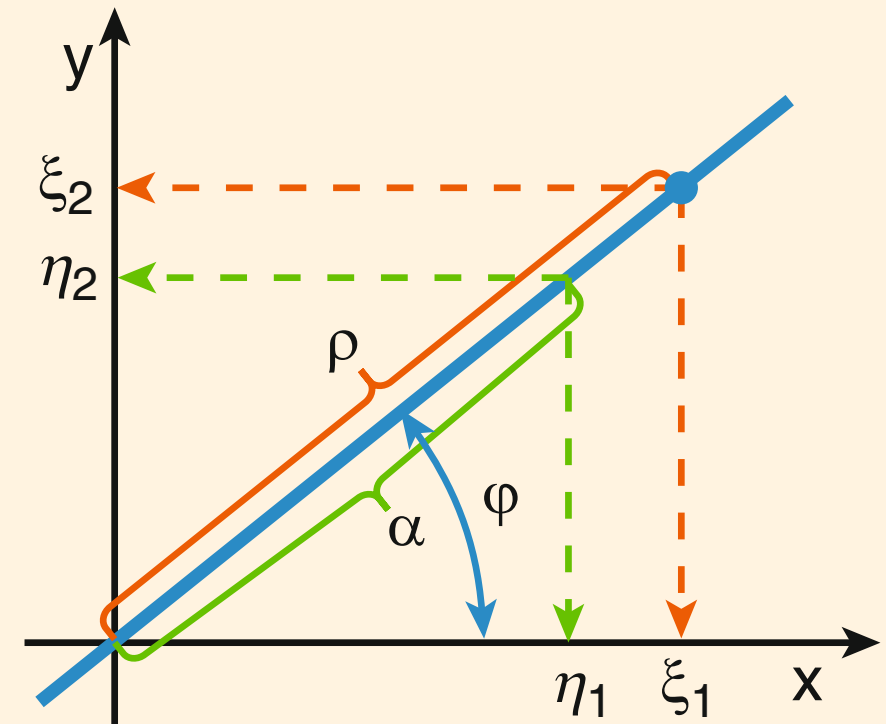

2.11 Random Points & Directions

Uniform Point within a Circle (R)

[A] Rejection:

1. Generate γ_1 and γ_2
2. $\xi_1 = R(2\gamma_1 - 1)$, $\xi_2 = R(2\gamma_2 - 1)$, where R is the radius of the circle.
3. If $x_1^2 + \xi_2^2 > R^2$, the the point is outside the circle; go to step 1.
4. Else, output coordinates (ξ_1, ξ_2) of the point

[B] CDF Inversion (in polar coordinates):

Polar coordinates distribution:

$$f(\rho, R) = \frac{\rho}{\pi R^2}, \quad \rho < R$$

1. Generate $\gamma_1 \rightarrow \phi = 2\pi\gamma_1$
2. Generate $\gamma_2 \rightarrow \rho = R\sqrt{\gamma_2}$
3. Calculate x and y coordinates of the point

$$\xi_1 = \rho \cos \phi$$

$$\xi_2 = \rho \sin \phi$$

Uniform Point in Sphere (R)

In Cartesian coordinates:

$$f(x, y, z) = \frac{1}{(4\pi/3)R^3} \\ \text{if } x^2 + y^2 + z^2 < R^2$$

In spherical coordinates:

$$f(r, \theta, \phi) = \frac{3r^2}{R^3} \frac{\sin \theta}{2} \frac{1}{2\pi} \\ \text{if } r < R$$

r , θ , and ϕ are independent:

$$f(r) = (3r^2)/R^3$$

$$f(\theta) = (\sin \theta)/2 \quad \text{or} \quad f(\mu) = \frac{1}{2} \quad \text{for } \mu = \cos \theta$$

$$f(\phi) = 1/(2\pi)$$

1. Generate $\gamma \rightarrow r = R \cdot \gamma^{1/3}$
2. Generate $\gamma \rightarrow \mu = 2\gamma - 1$
3. Generate $\gamma \rightarrow \phi = 2\pi\gamma$
4. $(\xi_1, \xi_2, \xi_3) = (r \sin \theta \cos \phi, r \sin \theta \sin \phi, r \cos \theta)$

2.11

Isotropic Direction $\hat{\Omega}$

Consider a unit direction vector $\vec{\Omega} = (\Omega_x, \Omega_y, \Omega_z)$.

Isotropic means that, for any solid angle $d\omega$,

$$P(\vec{\Omega} \in d\omega) = \frac{d\omega}{4\pi}$$

Since an infinitesimal solid angle is

$$d\omega = \sin\theta d\theta d\phi = d\mu d\phi,$$

μ and ϕ are independent and uniformly distributed:

$$\mu \in [-1, 1] \text{ uniform}$$

$$\phi \in [0, 2\pi] \text{ uniform}$$

Algorithm:

1. Generate $\gamma \rightarrow \mu = 2\gamma - 1$

2. Generate $\gamma \rightarrow \phi = 2\pi\gamma$

Then, the components are:

$$\Omega_x = (1 - \mu^2)^{1/2} \cos \phi$$

$$\Omega_y = (1 - \mu^2)^{1/2} \sin \phi$$

$$\Omega_z = \mu$$

Uniform Random Points on a Spherical Surface

Sample an isotropic vector $\vec{\Omega} = (\Omega_x, \Omega_y, \Omega_z)$.

Calculate x , y , and z coordinates of the point:

$$\xi_1 = \Omega_x R$$

$$\xi_2 = \Omega_y R$$

$$\xi_3 = \Omega_z R$$

Here, R is the radius of the sphere.

2.12 Joint Distributions

Sample two random numbers that are not statistically independent.

Joint PDF factorization:

$$f_{\xi,\eta}(x, y) = f_{\xi}(x)f_{\eta}(y | \xi = x)$$

Marginal: $f_{\xi}(x) = \int f_{\xi,\eta}(x, y)dy$

Conditional: $f_{\eta}(y | \xi = x) = \frac{f_{\xi,\eta}(x, y)}{f_{\xi}(x)}$

Algorithm:

1. Sample ξ from marginal $f_{\xi}(x)$
2. Sample η from conditional $f_{\eta}(y | \xi = x)$

Example — ionization:

Sample the energy of the ejected electron first,
then sample ejection angle
(using energy-dependent conditional distribution).

2.13 Simulating a Particle-Scattering Event

Algorithm


1. Sample E' (post-scatter energy)
2. Sample the scattering angle θ (polar angle)
3. Sample the azimuthal angle $\phi \sim \text{Uniform}[0, 2\pi]$
4. Rotate direction: $\vec{\Omega} \rightarrow \vec{\Omega}'$

Direction rotation (general Ω):

$$\Omega'_x = \Omega_x \cos \theta - \frac{\sin \theta}{(1 - \Omega_z^2)^{1/2}} \left(\Omega_x \Omega_z \cos \phi + \Omega_y \sin \phi \right)$$

$$\Omega'_y = \Omega_y \cos \theta - \frac{\sin \theta}{(1 - \Omega_z^2)^{1/2}} \left(\Omega_y \Omega_z \cos \phi - \Omega_x \sin \phi \right)$$

$$\Omega'_z = \Omega_z \cos \theta + (1 - \Omega_z^2)^{1/2} \sin \theta \sin \phi$$

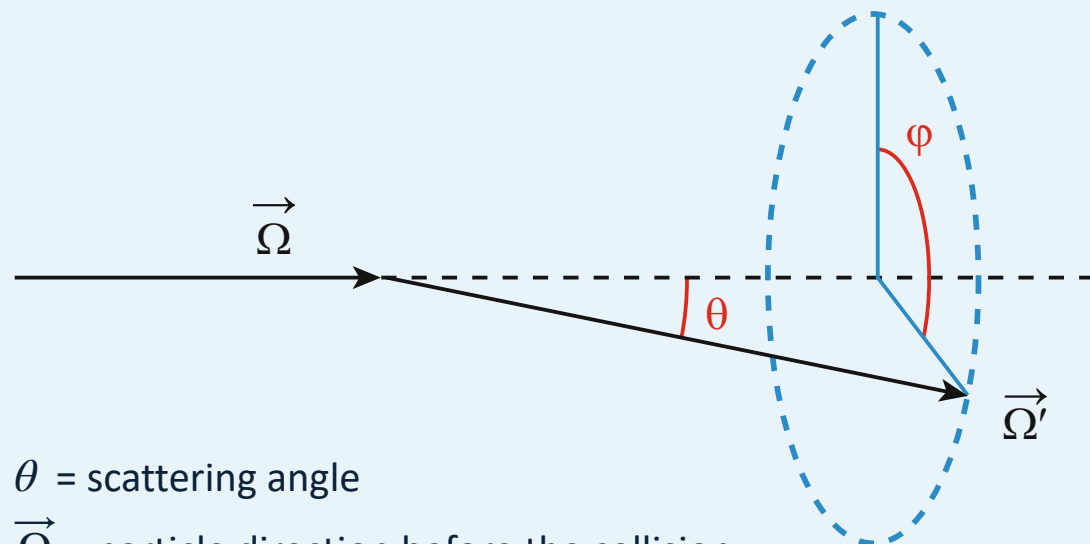

θ = scattering angle

$\vec{\Omega}$ = particle direction before the collision

$\vec{\Omega}'$ = particle direction after the collision

Consider a system of coordinates with unit vectors $\hat{x}$, $\hat{y}$, and $\hat{z}$:

$$\vec{\Omega} = \Omega_x \hat{x} + \Omega_y \hat{y} + \Omega_z \hat{z}$$

$$\vec{\Omega}' = \Omega'_x \hat{x} + \Omega'_y \hat{y} + \Omega'_z \hat{z}$$

Let's define a new system of coordinates $\hat{x}'$, $\hat{y}'$, and $\hat{z}'$, where $\hat{z}'$ is along the direction $\vec{\Omega}$ before scattering.

$$\hat{z}' = \vec{\Omega}, \quad \hat{y}' = \frac{\vec{\Omega} \times \hat{z}}{|\vec{\Omega} \times \hat{z}|}, \quad \text{and} \quad \hat{x}' = \hat{y}' \times \hat{z}'$$

The new direction vector is expressed using the new system and scattering angles θ and ϕ :

$$\vec{\Omega}' = \sin \theta \cos \phi \hat{x}' + \sin \theta \sin \phi \hat{y}' + \cos \theta \hat{z}'$$

Then, we express $\vec{\Omega}'$ in terms of $(\hat{x}, \hat{y}, \hat{z})$:

$$\Omega'_x = \hat{x} \cdot \vec{\Omega}', \quad \Omega'_y = \hat{y} \cdot \vec{\Omega}', \quad \text{and} \quad \Omega'_z = \hat{z} \cdot \vec{\Omega}'$$

2.14 Algorithm Testing Methods

1

Histogram (Qualitative)

1. Generate large sample $\{\gamma_1, \gamma_2, \dots, \gamma_N\}$
2. Build normalized histogram:

$$h_i = \frac{n_i}{N\Delta x_i} = \text{height of the bar}$$

Δx_i = histogram bin width

n_i = number of random values that fell within the i -th bin.

$$N = \sum_i n_i = \text{sample size}$$

The histogram is correctly normalized:


$$\sum_i h_i \Delta x_i = 1$$

3. Plot h_i vs $f(x)$

→ $f(x)$ should pass through the centers of the histogram bars at their tops.

⚠ Narrow bin at singularities

⚠ If $f(x)$ has a discontinuity, a bin boundary should be placed exactly at the point of discontinuity.

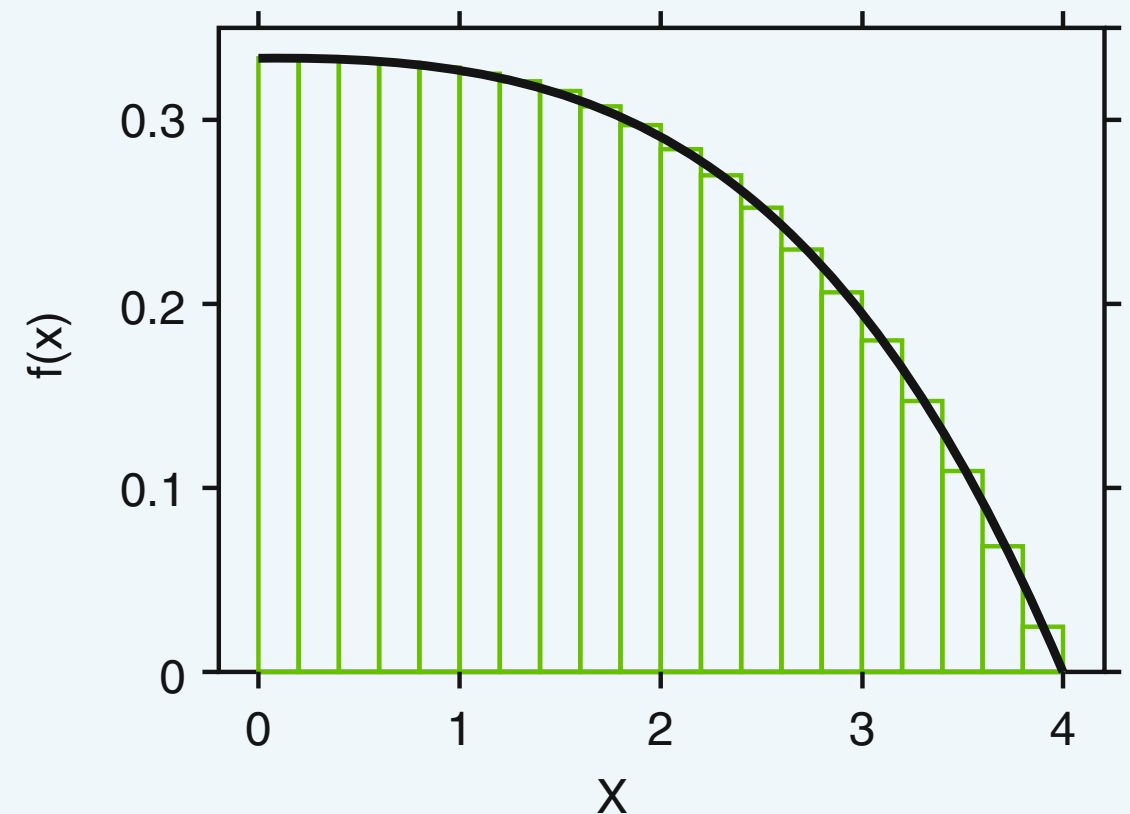

2.14

2

χ^2 Test (Quantitative)

1. Divide axis into k intervals

2. Expected probabilities: $p_i = \int_{a_i}^{b_i} f(x)dx$

3. Observed probabilities: $\pi_i = \frac{n_i}{N}$

4. Compute:

$$\chi^2(\text{obs}) = \sum_{i=1}^k \frac{(\pi_i - p_i)^2}{p_i}$$


The sum is χ^2 -distributed if each n_i is much greater than 1 and k is sufficiently large.

5. Using the χ^2 distribution, calculate the probability of observing a χ^2 that is equal or greater than $\chi^2(\text{obs})$, using

$$P\{\chi^2 \geq \chi^2(\text{obs})\} = \int_{\chi^2(\text{obs})}^{\infty} p_{\chi^2}(x)dx$$

6. If the above probability is small, the hypothesis is rejected.

For example, $P(\chi^2 \geq \chi^2(\text{obs})) < 0.05$ or 0.001 .

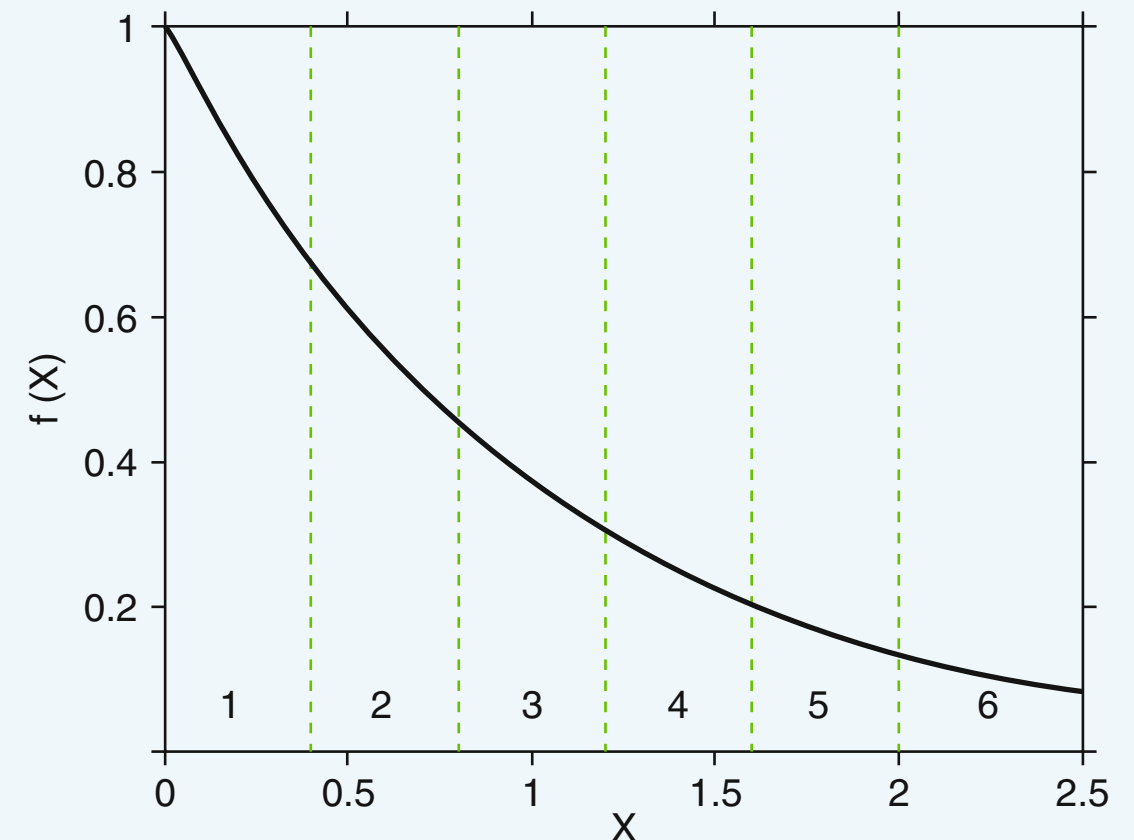

2.14

3

Likelihood Ratio (Sensitive)

θ_0 = exact parameters

$\hat{\theta}$ = the maximum likelihood estimates of θ

1. Generate a large sample $\{\xi_1, \xi_2, \dots, \xi_N\}$.
2. Estimate parameters $\hat{\theta}$ from sample
3. Compute ratio:


$$\lambda_i = \prod_{j=1}^i \frac{f(\xi_j | \theta_0)}{f(\xi_j | \hat{\theta})}; \quad i = 1, 2, \dots, N$$

4. Plot λ_i vs i

Correct code $\rightarrow \lambda_i$ will fluctuate around 1 (stable)

Error $\rightarrow \lambda_i$ diverges.

Very sensitive – detects even 1% errors in parameters!

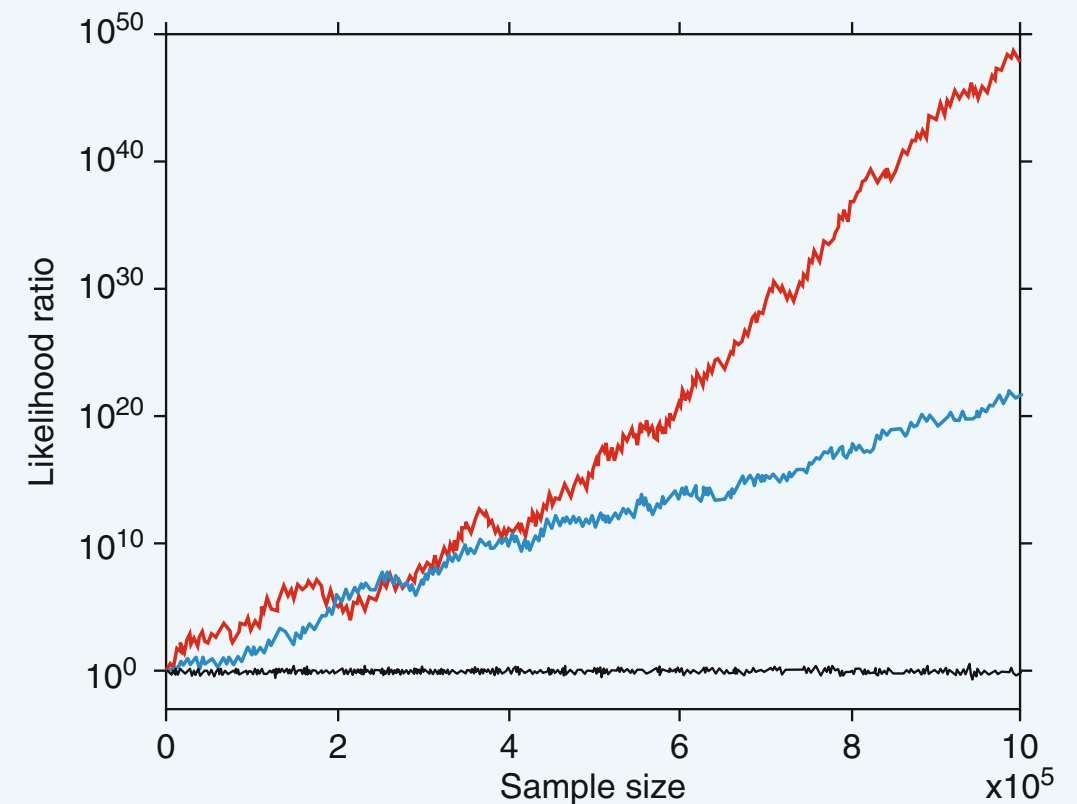

Likelihood ratio test for a code sampling normal distribution $N(1,1)$.

The black line shows the likelihood for a correct code.

The blue line indicates the code with a 1% error in the mean.

The red line represents a 1% error in the standard deviation.