

**HYPER
TOUGH™**

VISUAL BRAND LANGUAGE

SEPTEMBER 2023

TABLE OF CONTENTS

- Introduction
- Identity
- Color
- Typography
- Logo
- Labels
- Socket Pattern
- Handle Design
- Form
- Product Examples

HYPER TOUGH GUARDRAILS
ARE CURRENTLY UNDER REVIEW FOR SOME PRODUCT CATEGORIES
(SEE YELLOW HIGHLIGHTED NOTATIONS)

PLEASE REQUEST FINAL GUIDANCE
FROM BRAND TEAM
FOR CATEGORIES UNDER REVIEW.

VISUAL BRAND LANGUAGE GUIDE

Introduction Page

The following Visual Brand Language design guide is a reference for all new products in the Hyper Tough product line. The goal of the guideline is to maintain consistency of the Visual Brand Language (VBL) for the Hyper Tough product line. These are not, in any way, to be interpreted as regulatory, safety or compliance guidelines.

When developing any new Hyper Tough products, use this guide for color, textures, graphics and design details. This reference provides design specifications and examples of products to use as visual recommendations for any new product development. Vendors will use their best judgment to maintain the overall design identity of the line.

Please submit 3D CAD renderings of all new product design for approval by Walmart prior to development of any tooling for production.

Purchase plastic color chips for color and texture matching from:

Color Solutions International
<http://csicolors.com/solutions-supply-chain-partners/>
Vincent Dionna
9844-A Southern Pine Blvd
Charlotte, NC 28273
Phone: (704) 561-2908
dionna.vincent@csicolors.com

IDENTITY

SOCKITdesign

Using the socket shape from the “O” in the Hyper Tough logo to create an angular design language using the 45-degree angles on the sides of the socket shape. This bold direction increases the strength and durability of the Hyper Tough Brand.



COLOR




**Hyper Tough
Red**

2037992P

2037992PW

2037992TE

2037992-Metal



**Hyper Tough
White**

212401P

212401PW

212401TE



**Hyper Tough
Grey**


2111525P

2111525PW

2111525TE

2111525-Metal

80% Black




**Hyper Tough
Black**

210247P

210247PW

210247TE

210247-Metal



**Hyper Tough
Silver**

2111635P

2111635A-METAL

Color Code Key:

P = Plastic Color

PW = Polyester (textile

TE = Thermoplastic Elastomer

Metal = Metal

Paper = Paper

Color Requirements:

Delta E Requirement <=2.0 along with a visual match of the appropriate color chip from Color Solutions International for each product color.

Product colors should be viewed in a color viewing booth.



Plastic Texture

Use texture on CSI plastic color chip
VBL Color Specification Page
Used on all surfaces
2.5-degree draft minimum



**Overmold
Black**

65 Shore A - Medium/Soft Durometer
Should be consistent wall thickness and match the plastic texture above from the CSI plastic color chip.

Plastic Color Chips and Texture Samples

Color Solutions International

<https://csicolors.com/solutions-supply-chain-partners/>

Vincent Dionna

9844-A Southern Pine Blvd

Charlotte, NC 28273

Phone: (704) 561-2908

dionna.vincent@csicolors.com

The Walmart Color Team is available to assist suppliers with color matching. Contact Karen McGhee.

AVERAGE COLOR BALANCE

Hyper Tough Optimal Color Balance

Consistent color balance delivers a strong brand message and is essential to customer trust and confidence.

Color Balance will vary on each product and category, so refer to product examples or Brand Manager for guidance.

The color average is for reference only.


Optimal Balance

75% Hyper Tough Black

15% Hyper Tough Red

5% Metallic (depends on product)


5% Hyper Tough White (graphics/functional)

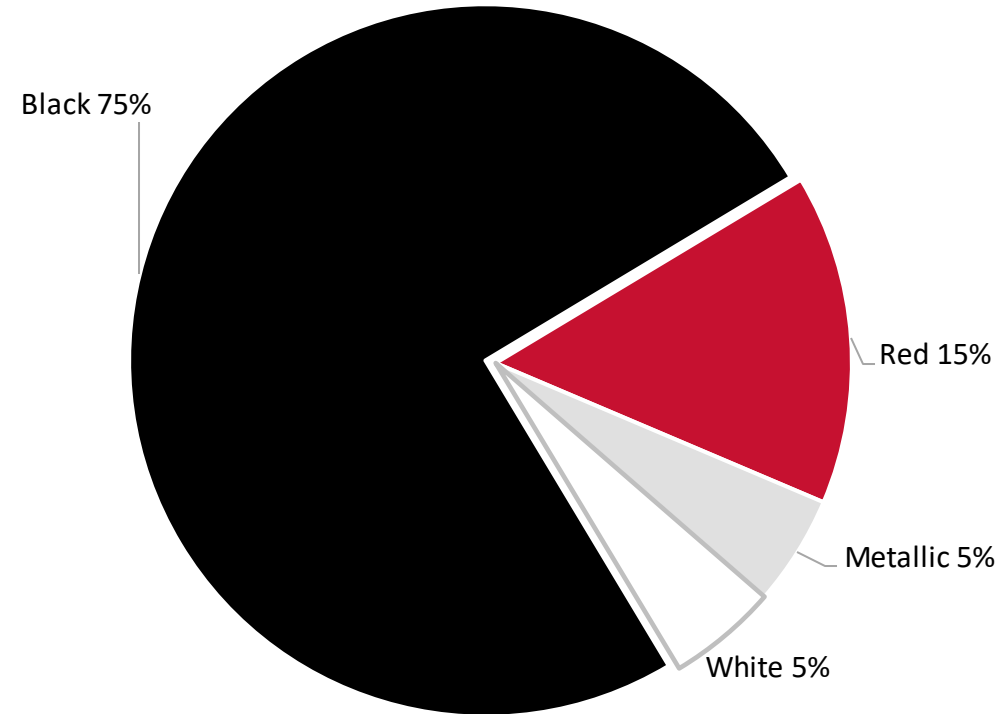

SEE COLOR PAGE FOR COLOR SPECIFICATIONS BY MATERIAL USED.



Hyper Tough
Red




Hyper Tough
White



Hyper Tough
Grey




Hyper Tough
Black



Hyper Tough
Silver

COLOR

COLOR PLACEMENT

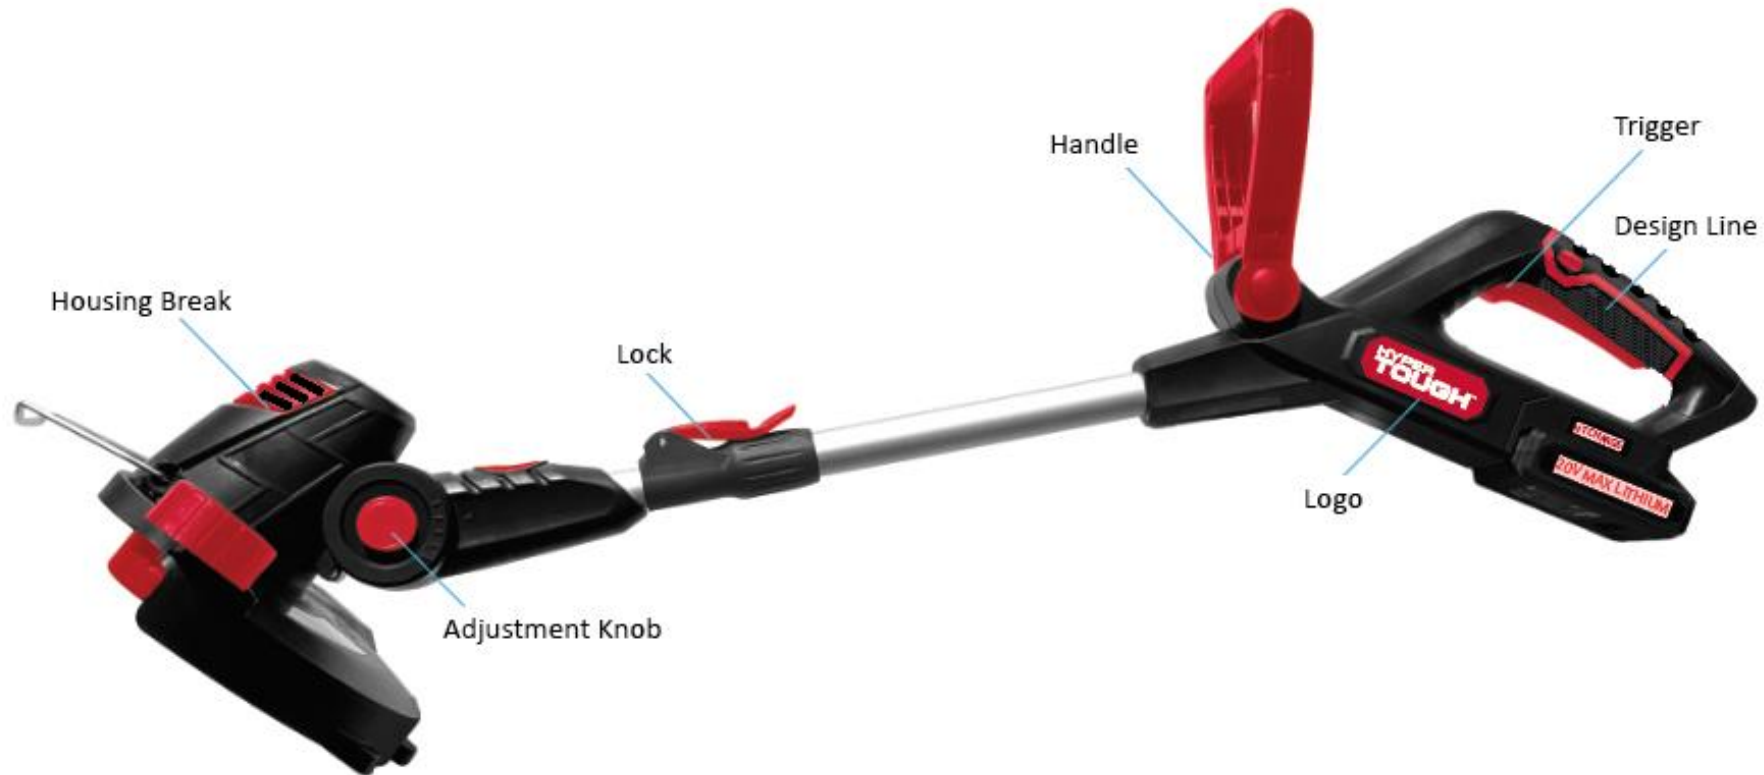

The use of red should be for touch points, accents and housing breaks.

TYPOGRAPHY

MAIN PRODUCTION DESCRIPTION

Red Text on Black Substrate

HELEVETICA NEUE LT STD - 87 BOLD CONDENSED OBLIQUE

Feature Copy, Side Panel Descriptors, Type Size 18/26 pt.

SECONDARY FEATURE

Red Text on Black Substrate

HELVETICA NEUE LT STD - 97 BLACK CONDENSED OBLIQUE

Product Description, Item Callout, Type size 11pt.

PRODUCT COPY

HELVETICA NEUE LT STD - 67 HEAVY CONDENSED

Warranty Information, Type size 6pt.

WARNING INFORMATION

MYRIAD PRO - SEMIBOLD CONDENSED

MYRIAD PRO - LIGHT CONDENSED

Type size 8pt.

Font Purchasing Information

Helvetica Neue LT Std Fonts: <http://www.myfonts.com/fonts/adobe/helvetica-neue/>

Myriad Pro Fonts: <http://www.myfonts.com/search/Myriad+Pro/fonts/>



LOGO

PREFERRED SOLUTION



White on Red
(Preferred Solution)

Hyper Tough Brand name
should contrast with label
and with product color.

Hyper Tough Label
should be in recessed
area .020" (.50 mm)

SECONDARY OPTIONS



White on Red Background
Recessed .020" (.50mm) filled with white paint
White Logo Pad Print
White Logo on Clear Label



Black on Metallic
(Laser Etch)
Must be pure black



Black on Wood
(Laser Etch)
Must be pure black

DO NOT USE



Note:
Do not use black text
on red background




Note:
Do not use white text
on black background




Emboss on Black
Must be pure black

LABELS

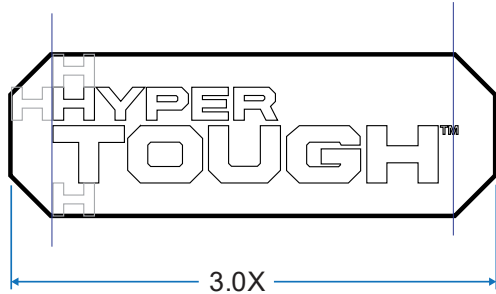

Proportions of Logo in Label

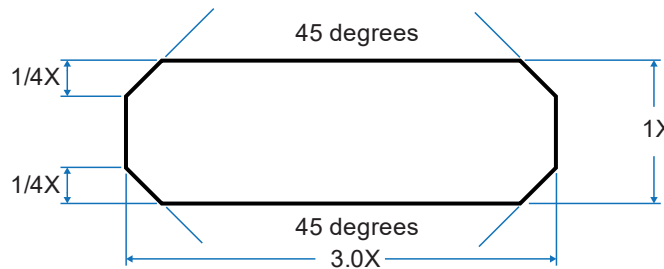

Proportions of Label

Hyper Tough Label should be proportional to size of product, based on reference products in design guide shown.



Min. Size



1X
1.0" (25.4 mm)

Standard Size



Max. Size

LABELS

LABEL MATERIAL


Clear polycarbonate or similar, satin finish or velvet matte on outer surface.

10 to 20 mil (.01”-.02”)

Printed on back of polycarbonate material.

3M pressure sensitive adhesive on back.

With peel off paper backing.

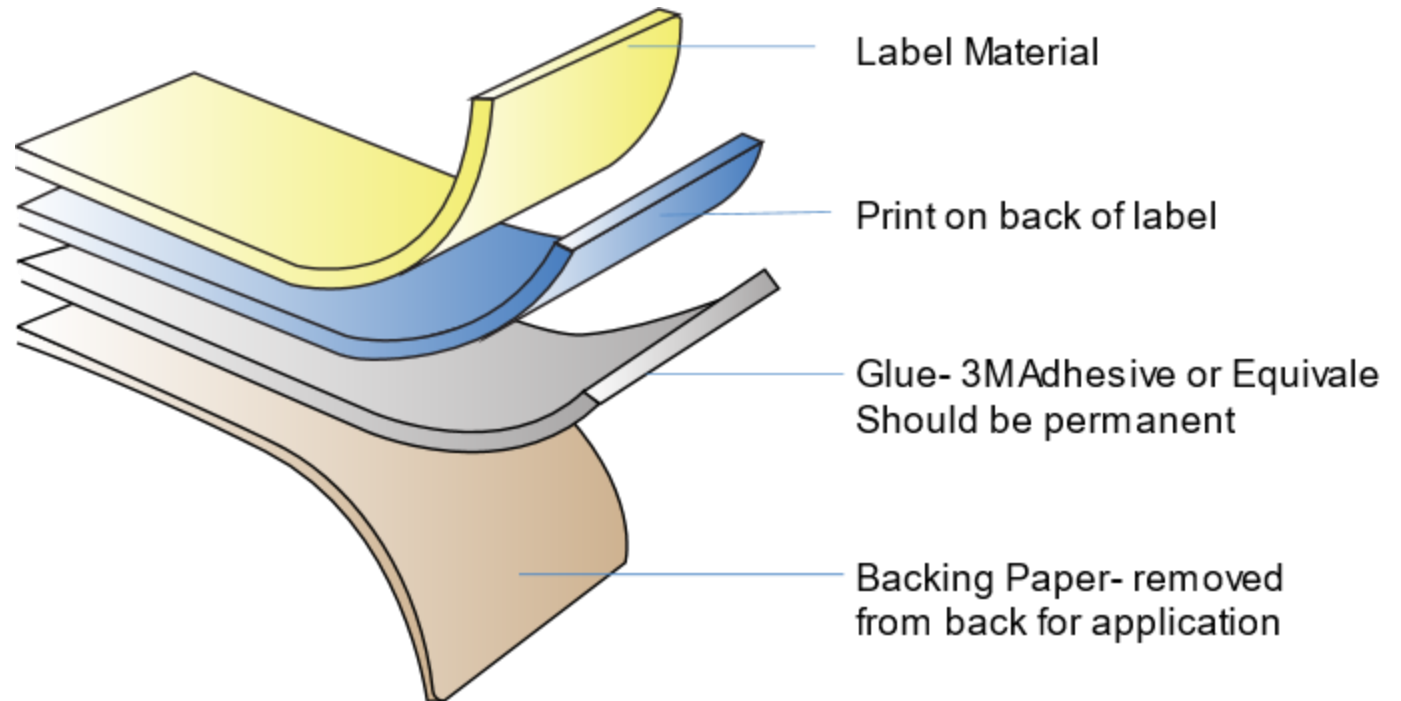

LABELS

BRAND LABEL

1. Hyper Tough Brand name label should always be the prominent graphic element on the product.
2. Hyper Tough Brand name label should stand alone, with other information as separate graphic elements.
3. Hyper Tough Brand name should contrast with label or with product color.
4. Hyper Tough Label should appear one time on either side of product
5. Label should always be located in recessed area .020"(.50 mm)




LABELS

SOFT GOODS LABEL



Labeling option for tarps, towels, gloves and other similar textile products.

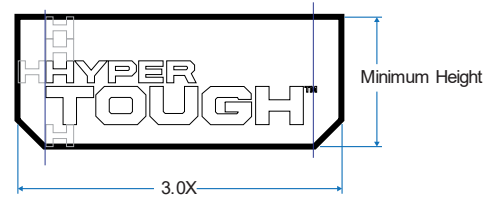

Proportions of Logo in Tag



Tags should maintain same proportions as Hyper Tough Label.

"HT CHARGE" BATTERIES

HT CHARGE

This graphic should only be used on removable, rechargeable Hyper Tough HT CHARGE 20v batteries.

Graphics must be present on batteries:

- 4 graphics as shown (not stickers)
- Date code on back of battery
- Call to recycle




Front Graphic

Two Side Graphics

We encourage suppliers to include a compatibility statement on battery packaging to help the customer:

**"This product is compatible with HT Charge 20V Lithium-Ion Batteries.
Not compatible with all Hyper Tough Batteries."**

Please reach out to brand team for master art file of battery graphics. HT Charge graphic should appear on both sides of the battery. Not a label

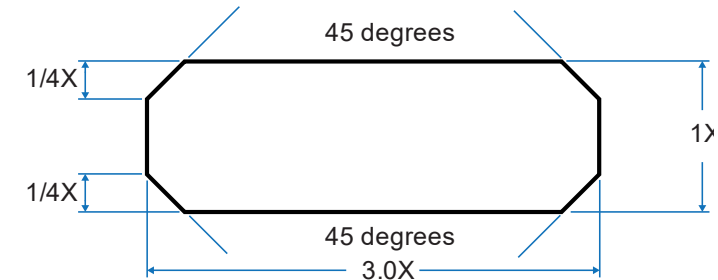

Proportions of Label



Back Graphic

Bottom of Battery includes date code. See Quality & Technical for details.

“HYPER TOUGH” BATTERIES

Battery guardrails currently in development.
Contact Brand Team for Update.

HYPER TOUGH BATTERIES

This graphic should only be used on removable, rechargeable Hyper Tough 12v batteries. Hyper Tough round batteries are the current format for 12v products.

Must be present on batteries:

- Label as shown
- Date code on back of battery
- Call to recycle


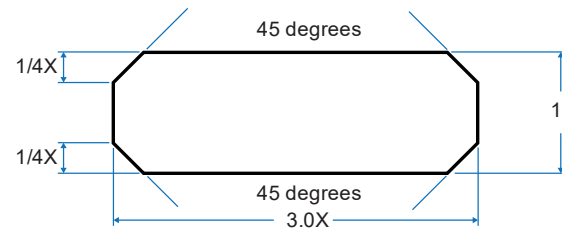


IMAGE OF HYPER TOUGH 12v
BATTERY COMING

Front

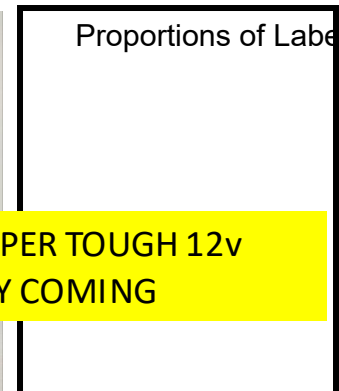

Proportions of Label

Back

Please reach out to brand team for master art file of battery label. Graphic should appear on both sides of the battery.




IMAGE OF HYPER TOUGH 12v
BATTERY FORMATS AND
GUIDANCE COMING

We encourage suppliers to include a compatibility statement on battery packaging to help the customer:


**“This product is compatible with Hyper Tough 12v
Lithium-Ion Batteries.”**

SOCKET PATTERN


Graphic Pattern

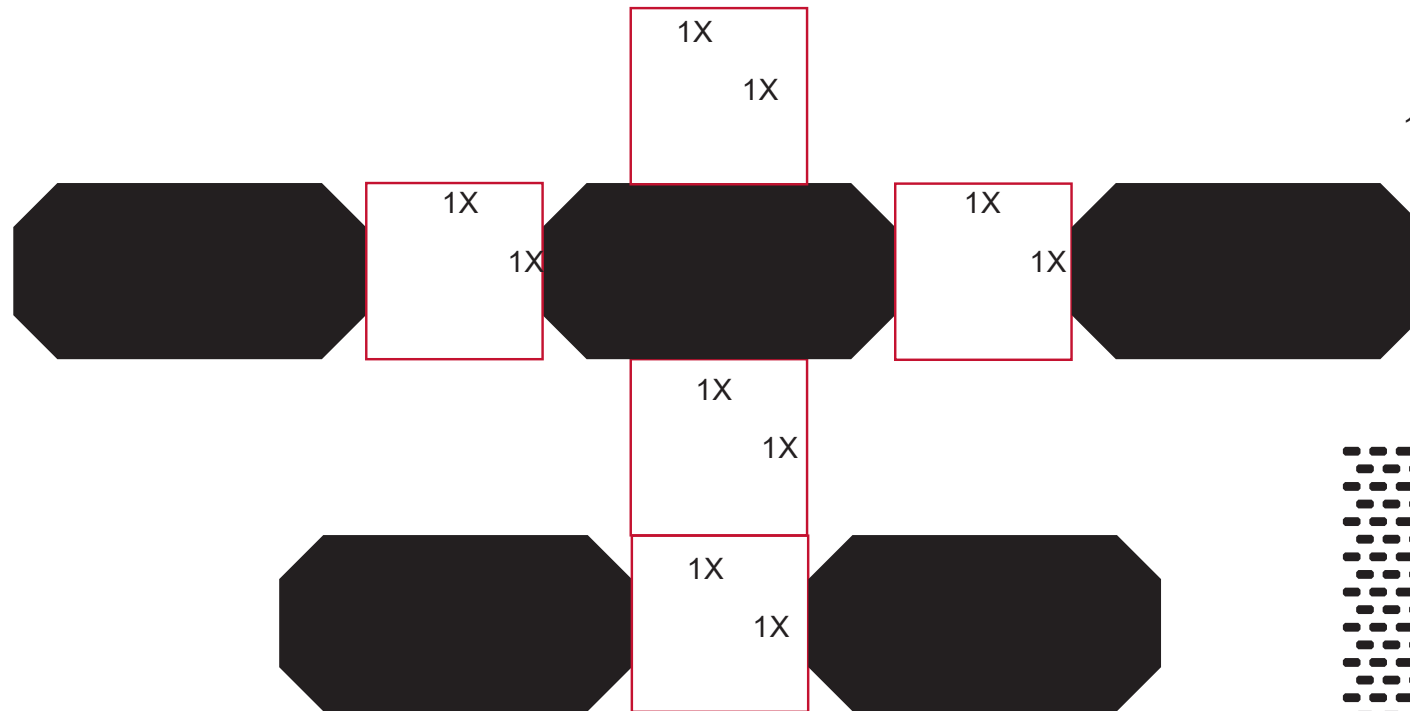

Proportions of Pattern

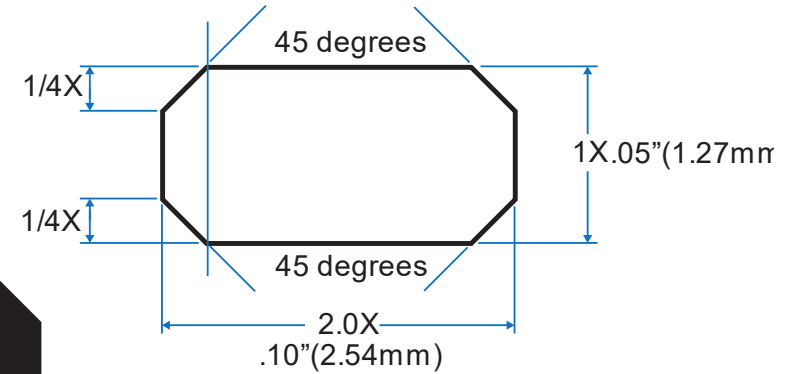


Full scale
Use on contrasting background.

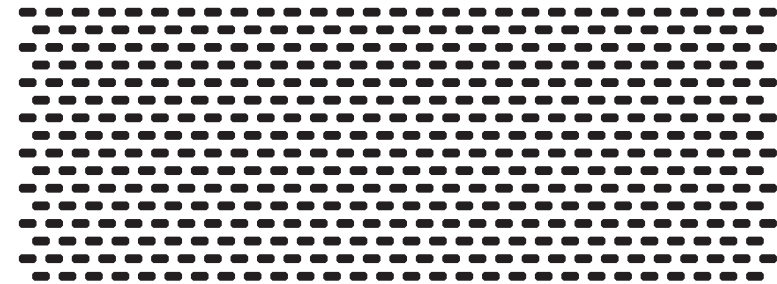

Note:
Proportions of pattern
can be scaled to any size



SOCKET PATTERN

Tactile Pattern

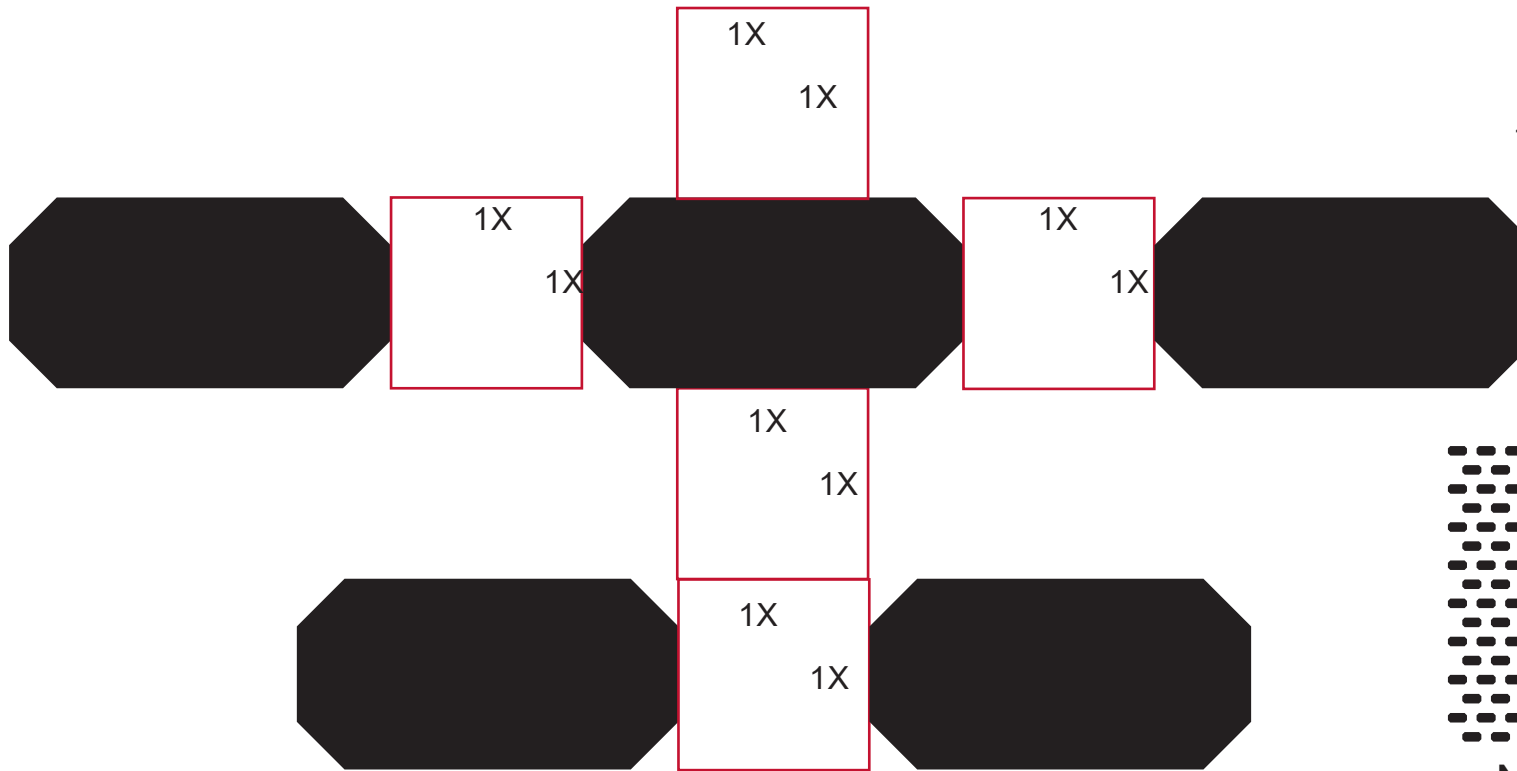

Note:
Proportions of pattern
can be scaled to any size.

Proportions of Pattern

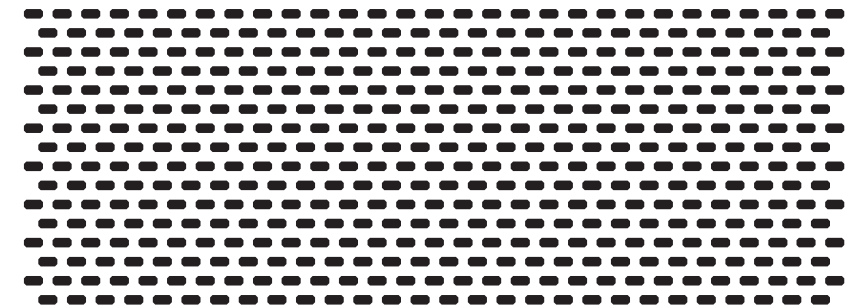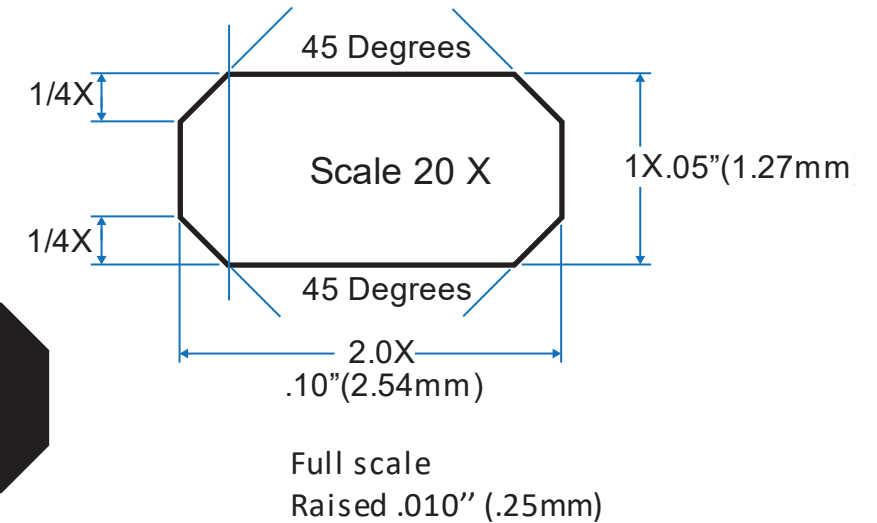


Note:


On smaller precision hand tool products, the patter can be used on the outside grip area of the handle. The large handle grip detail can be eliminated on small precision hand tools.

SOCKET PATTERN

Vent Patterns

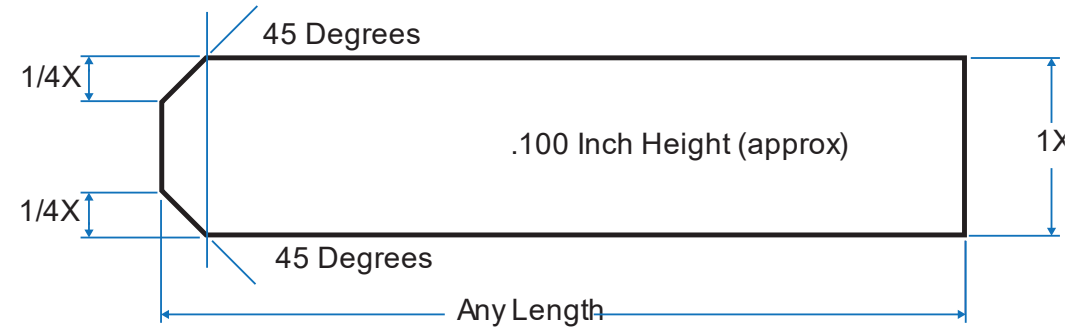

1/10 th Scale


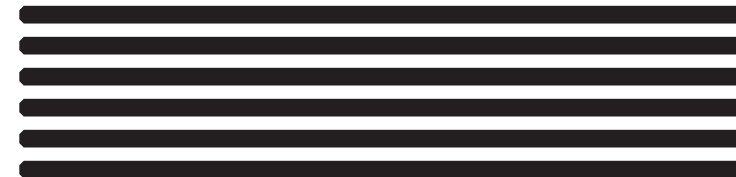


Min wall thickness for
dividing wall is .060" (1.52mm)

Max vent opening .125" (3.17mm)
for electric products

SOCKET PATTERN

Auxiliary Patterns

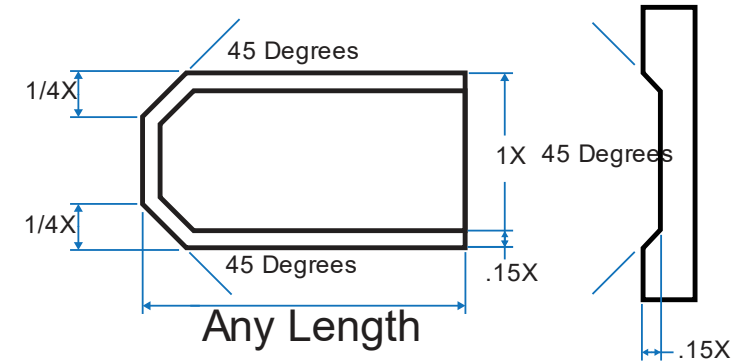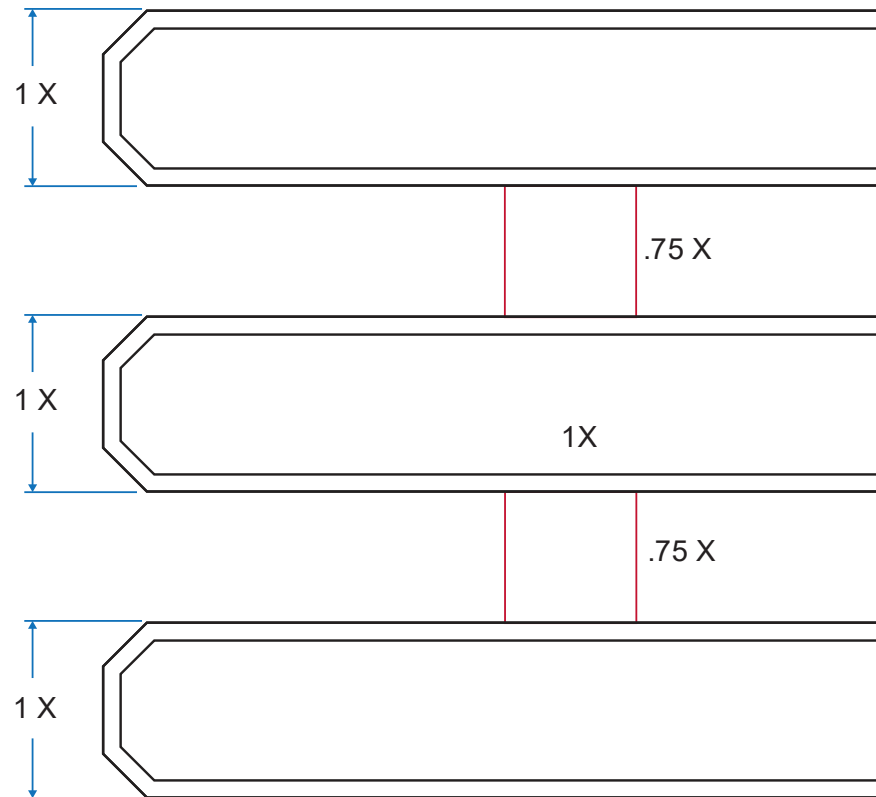


Shown in Proportions-
Can be scaled to any size to fit product.




SOCKET PATTERN


Grill Pattern for Air Flow Applications

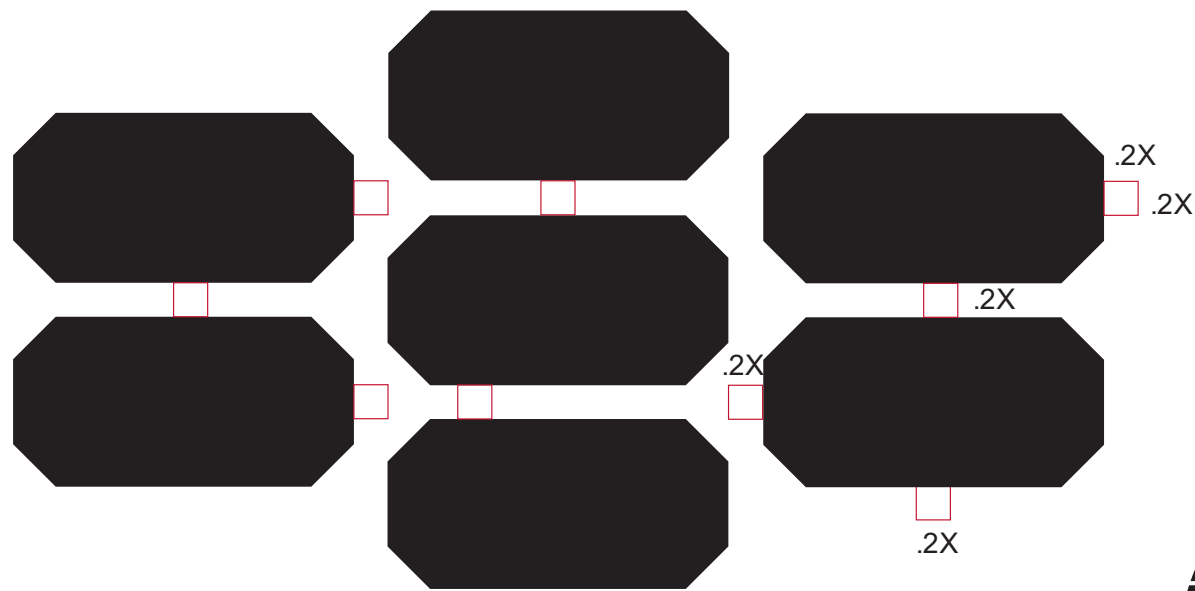

Scaled to Fit Product

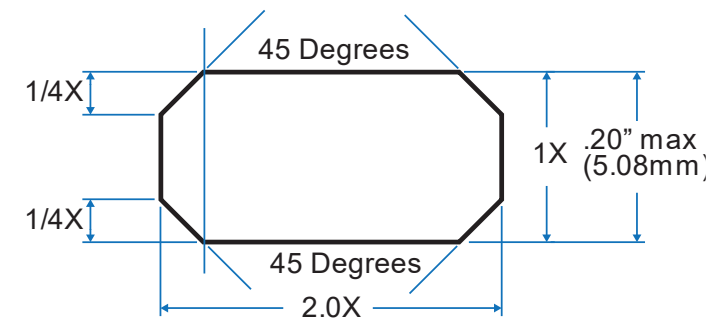

Proportions of Pattern

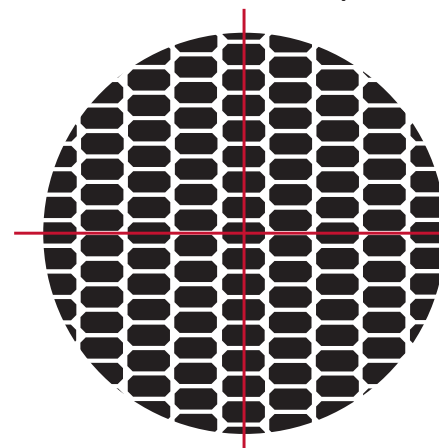


Sample Pattern

Keep pattern symmetrical
Side to side and top to bottom
Minimum wall thickness for
dividing wall is .060" (1.52mm)

HANDLE DESIGN

Handle Line Detail

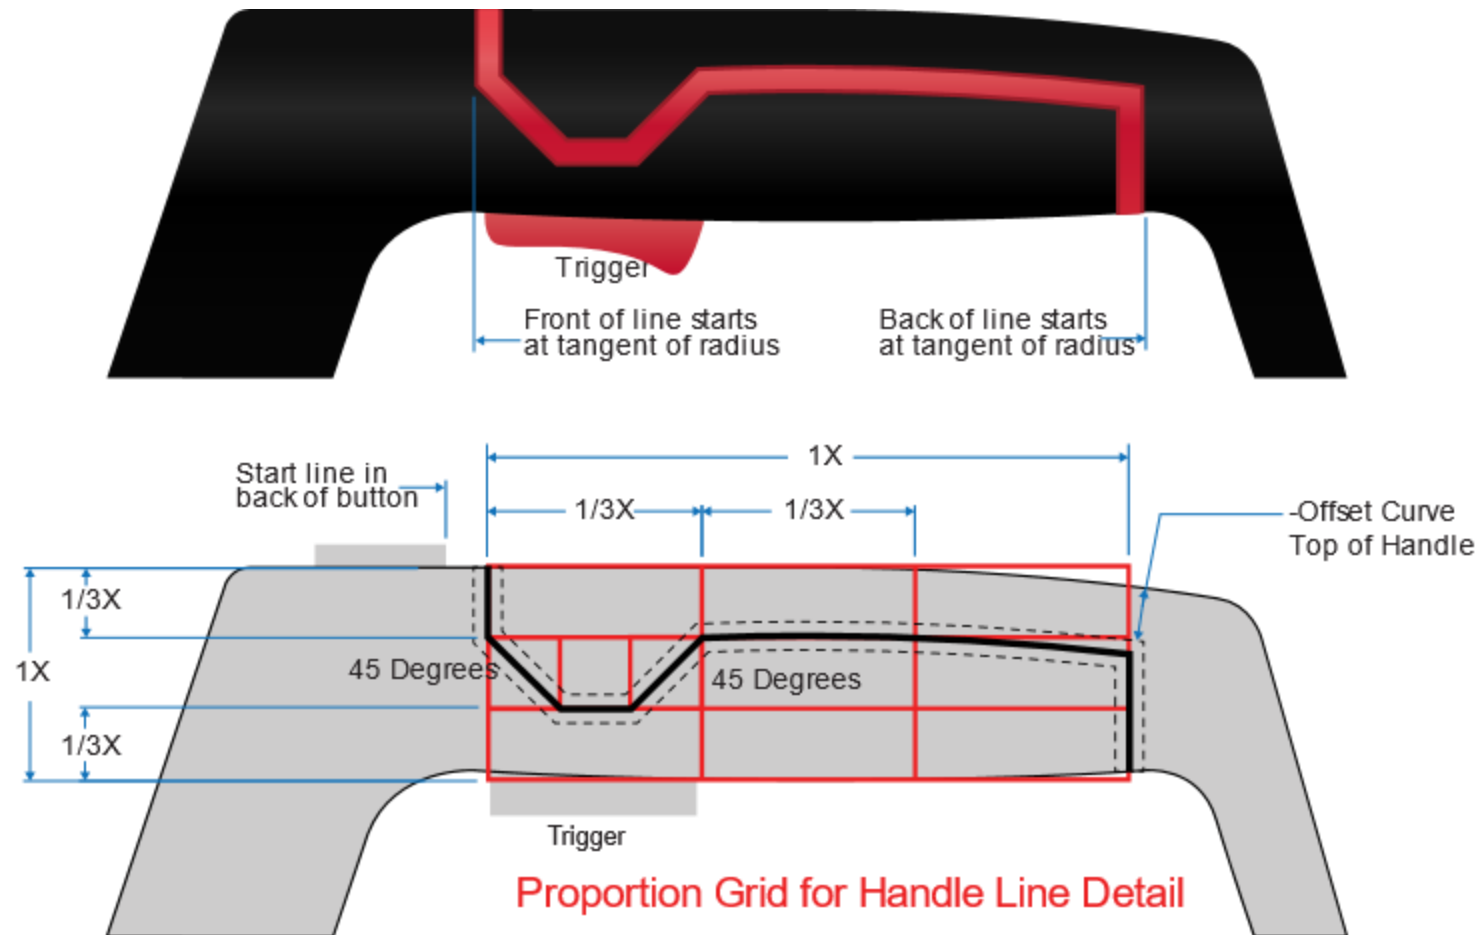


Note:

Proportions of pattern can be scaled to any size handle.

Some proportions may need to be modified to create the desired handle design line detail.


HANDLE DESIGN

Overmold Detail

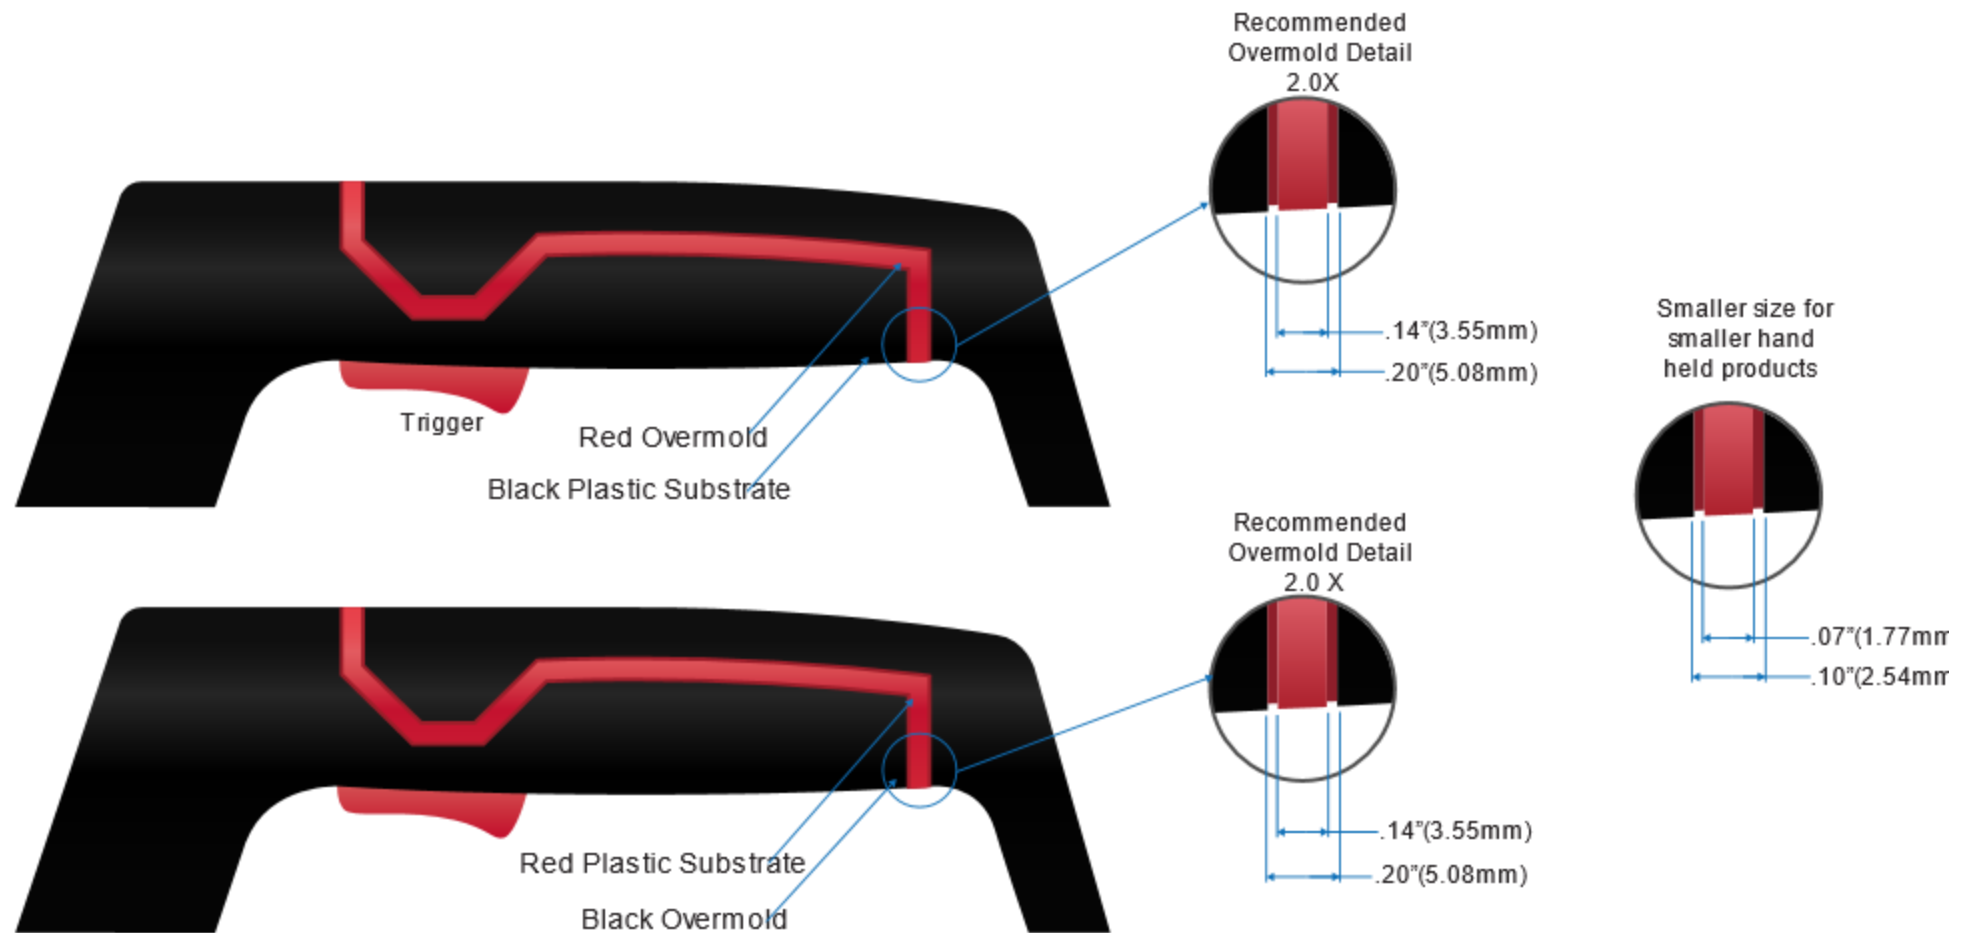


HANDLE PATTERN

All Handle Details

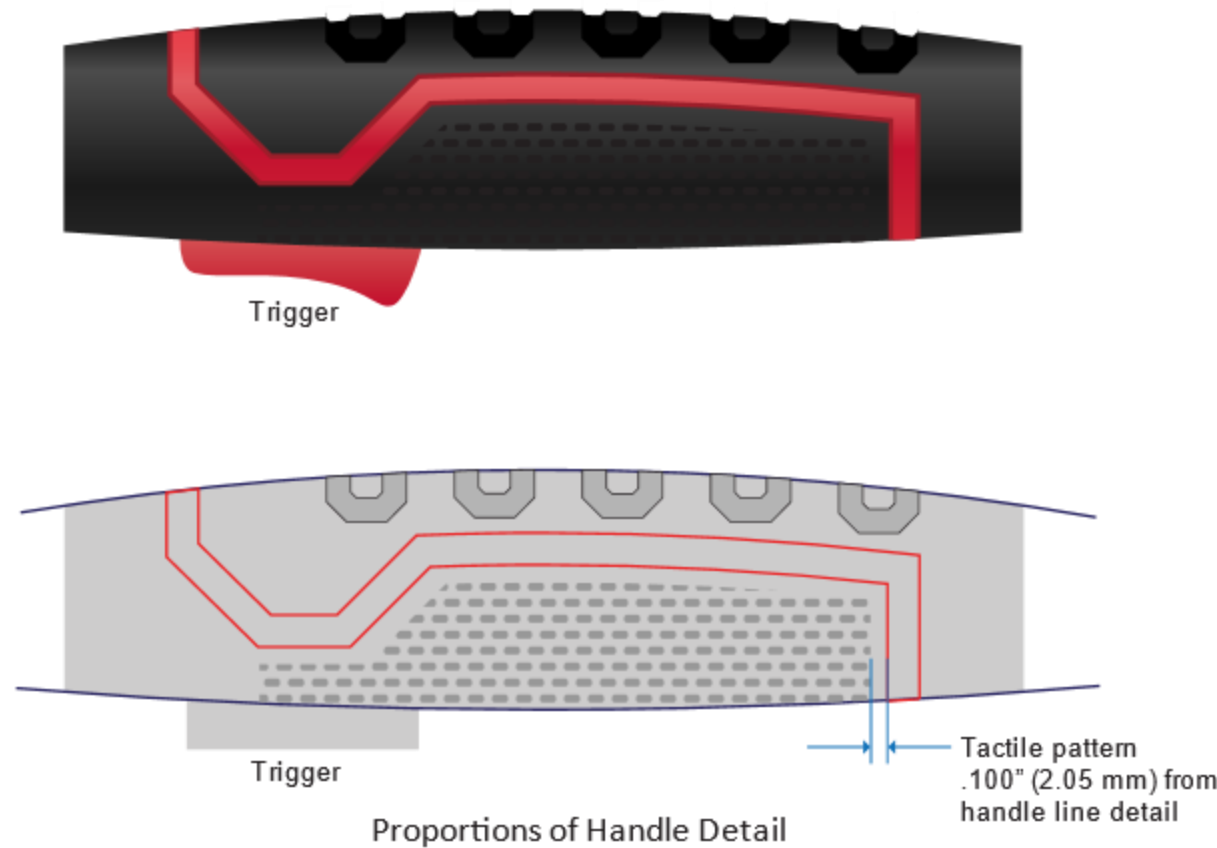


Full Scale
Raised .010" (.25mm)

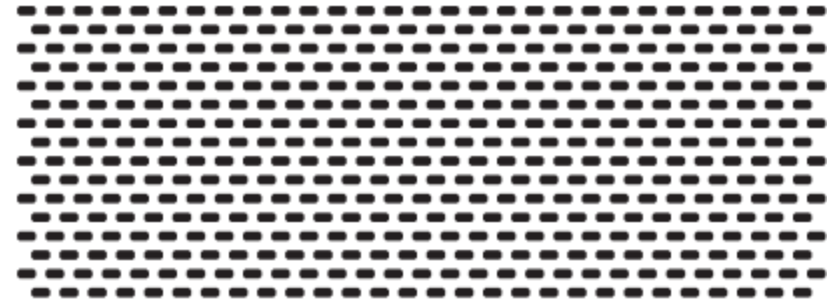

HANDLE DESIGN

Handle- Symmetrical

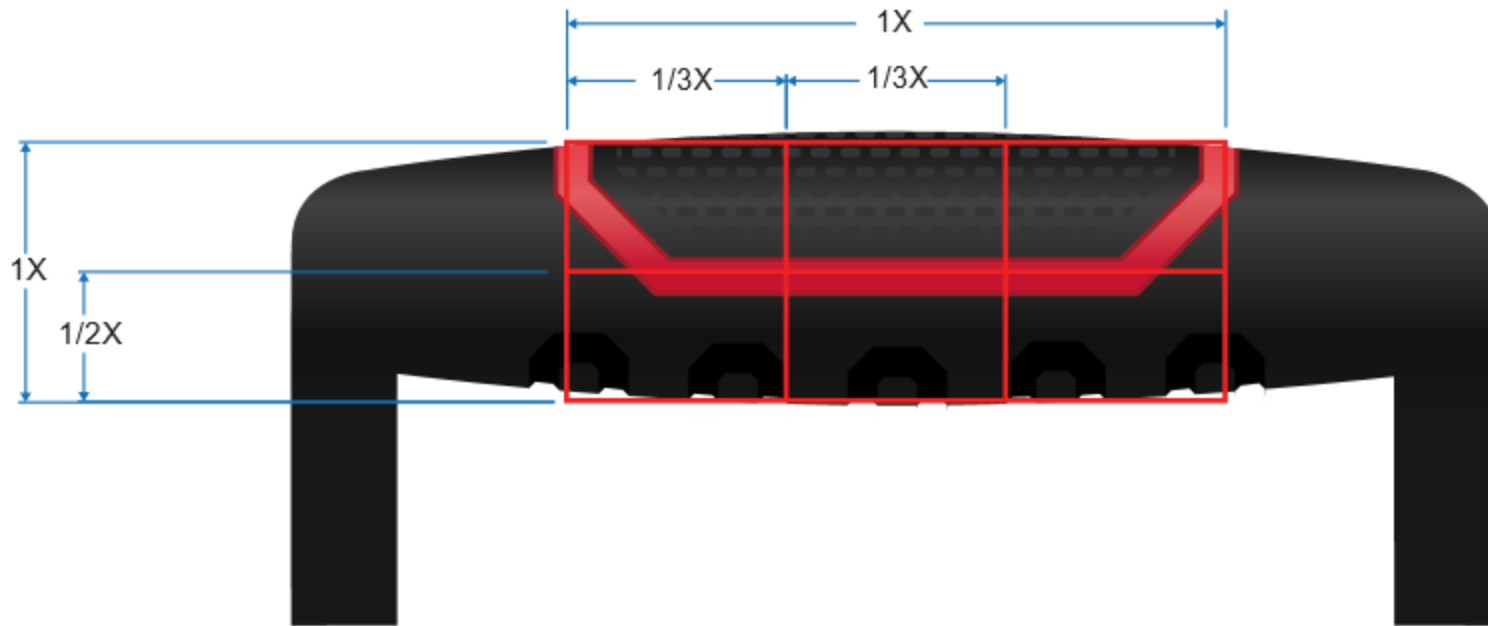

Proportion Grid for Symmetrical Handle

Note:

Proportions of pattern can be scaled to any size handle.




Some proportions may need to be modified to create the desired handle design line detail.

HANDLE DESIGN

Handle Detail 1

Note:

3 or 5 recess details
can be used depending
on size of product.

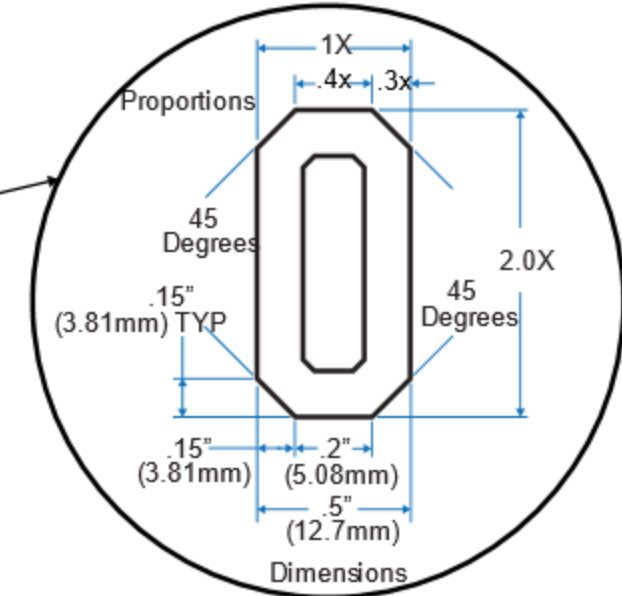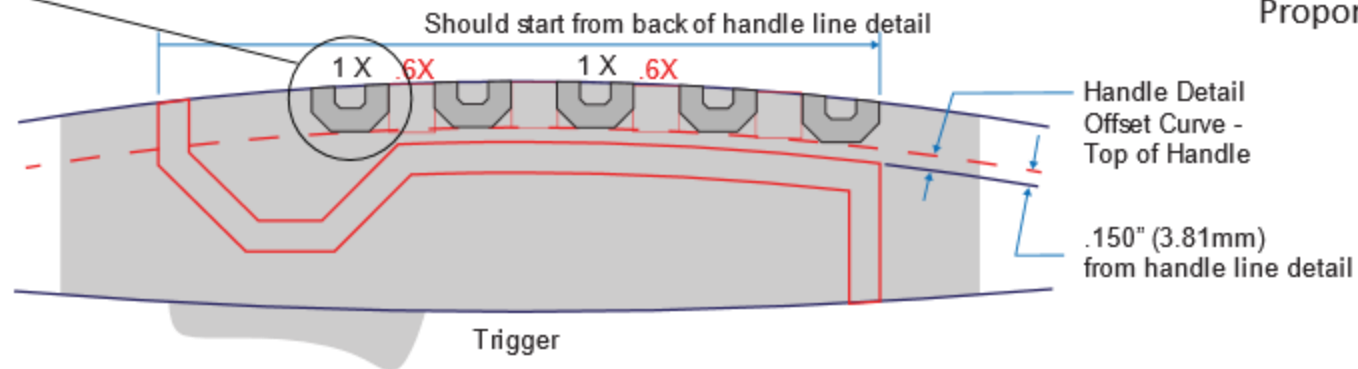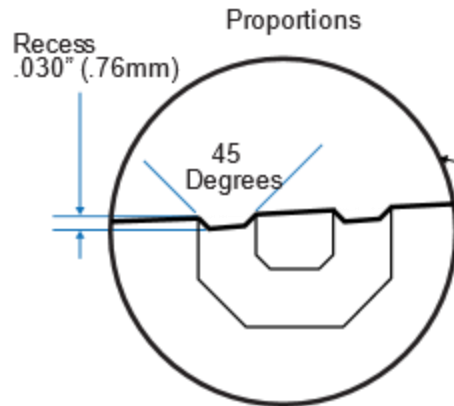



Proportions of Pattern

HANDLE DESIGN


Handle Detail 2

Note:

3 or 5 recess details
can be used depending
on size of product.

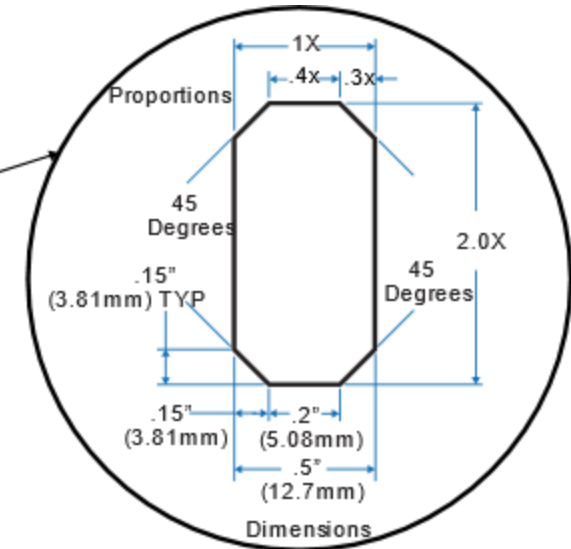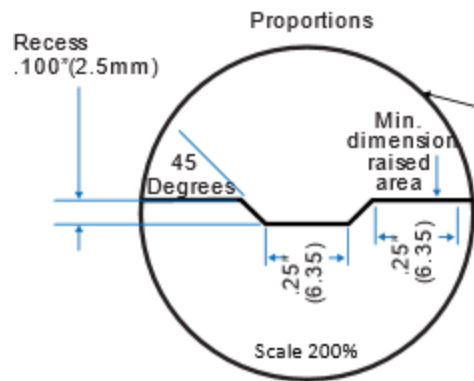


Proportions of Pattern

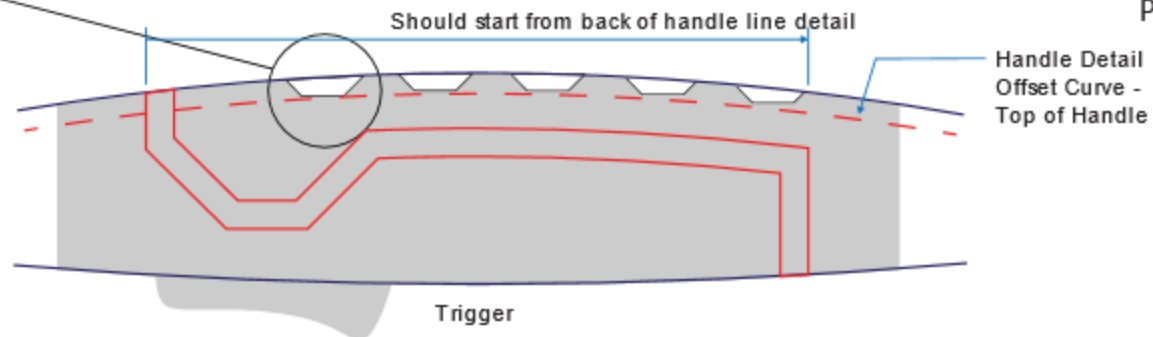

FORM

ERGONOMICS

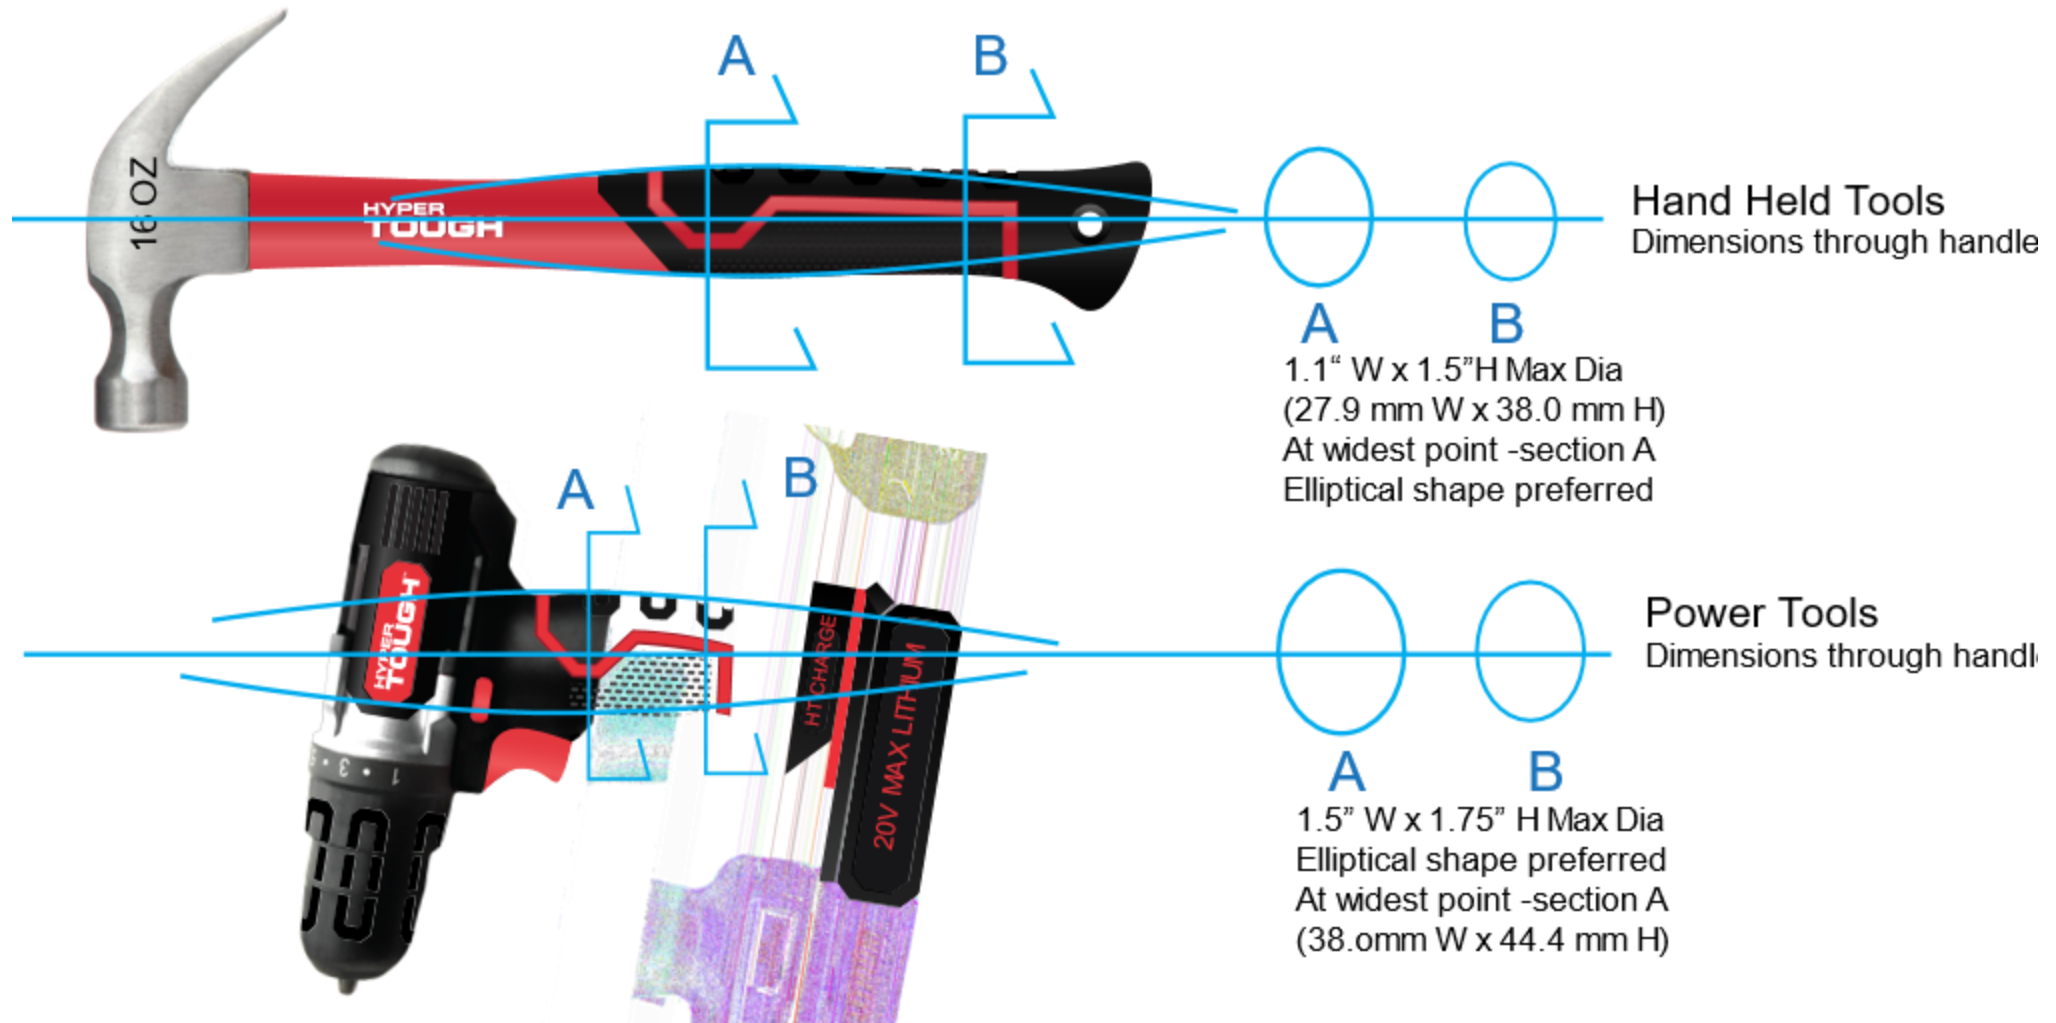

FORM

ERGONOMICS

Ergonomic layout - not for graphics alignment



Hand Held Tools
Angle through handle



Power Tools
Angle through handle



Note:

Handles should be at a natural extension of your arm and at a comfortable angle when in use. The center of gravity weight should be directly under your hand when in use.

CHAMFER DIRECTIONS

Note:

Smaller 45 degree chamfers can be added in other views / orientations.




Note:

45 degree chamfer angle should be used on main body running front to back on main axis.



TIGGERS AND BUTTONS

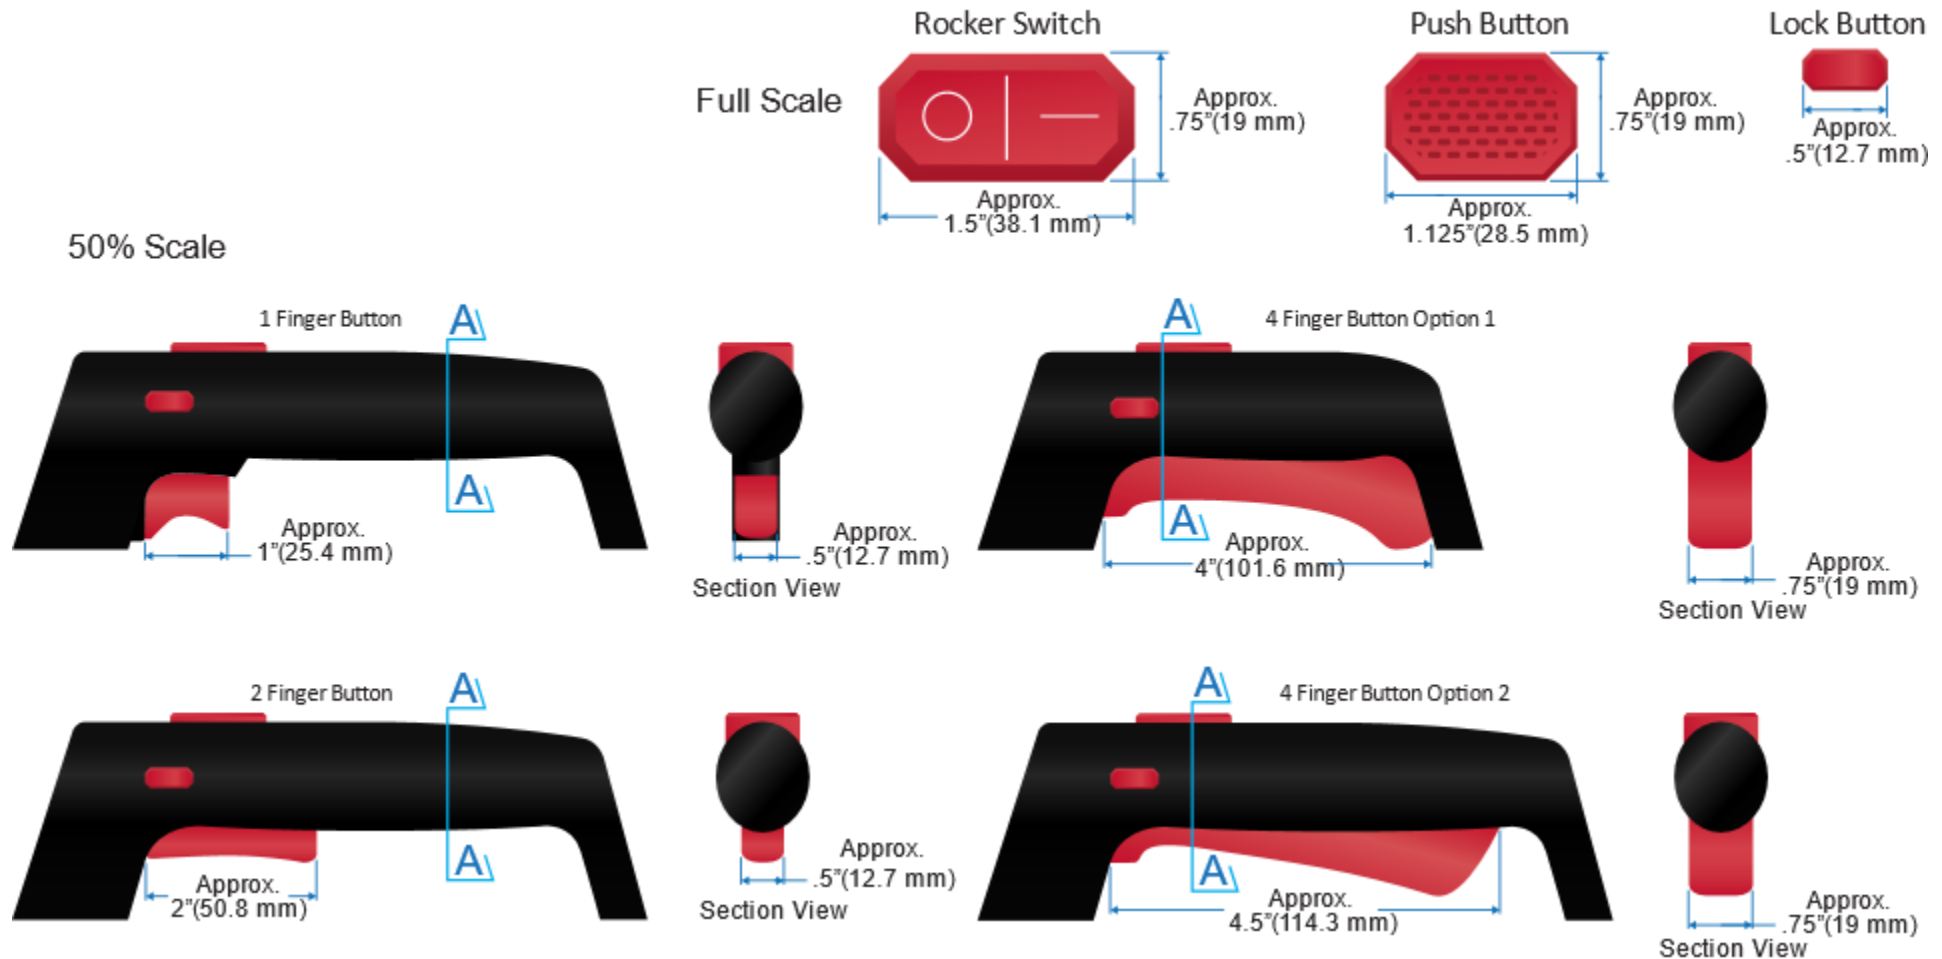


FORM


WHEELS




KNOBS AND CAPS

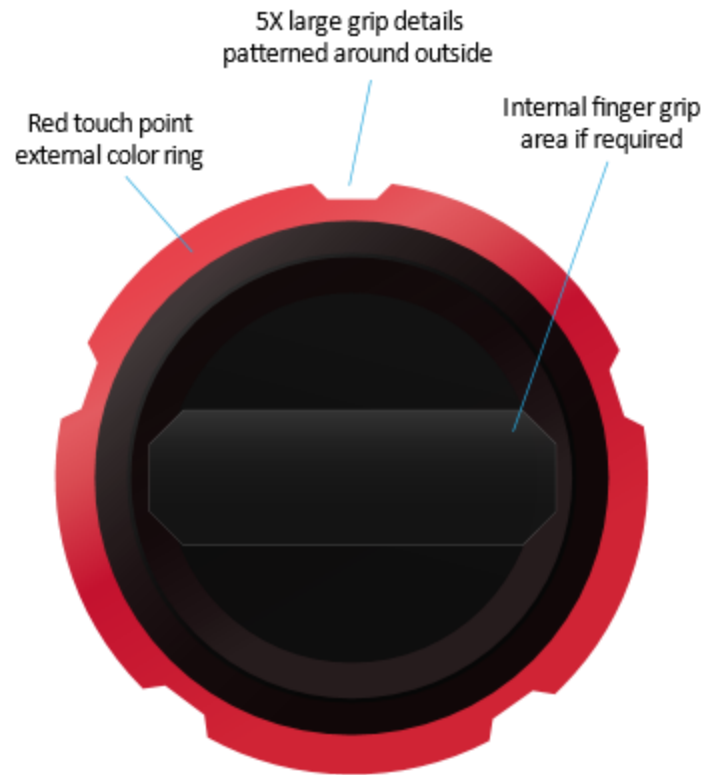



Adjustment Knobs

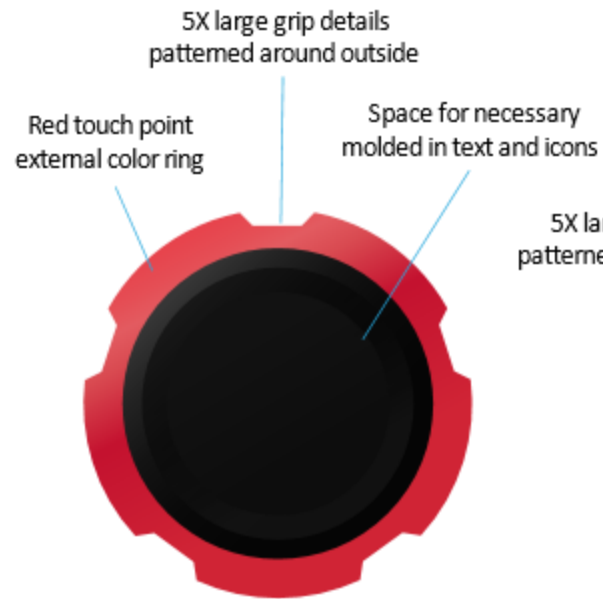

Gas Caps / Medium Knobs

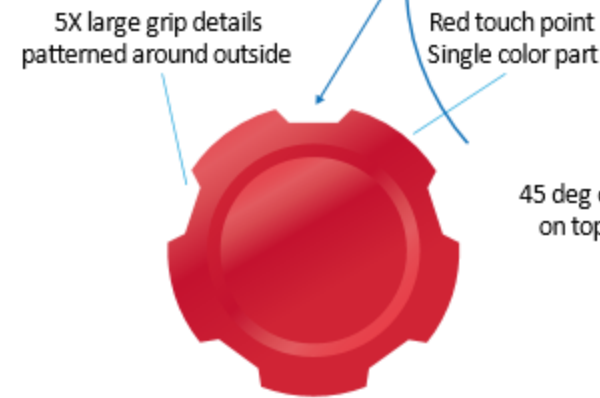


Small Knobs and Caps

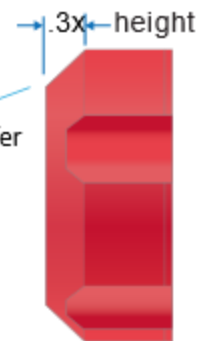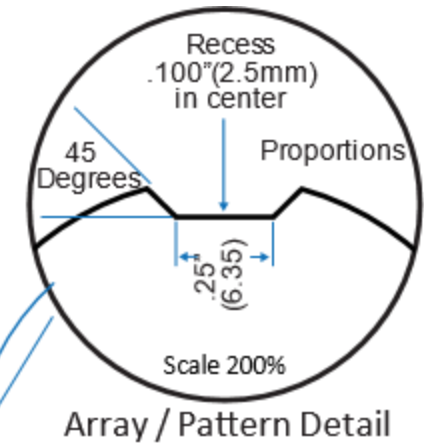




Knobs and Caps Side View

FORM

CORDS

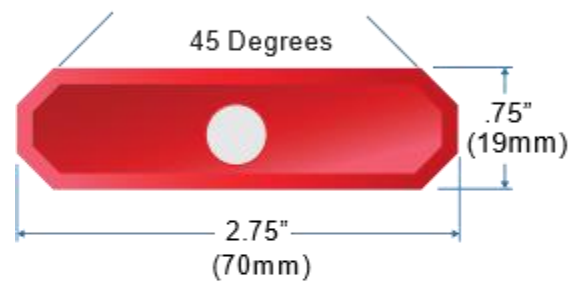

Pull Cord

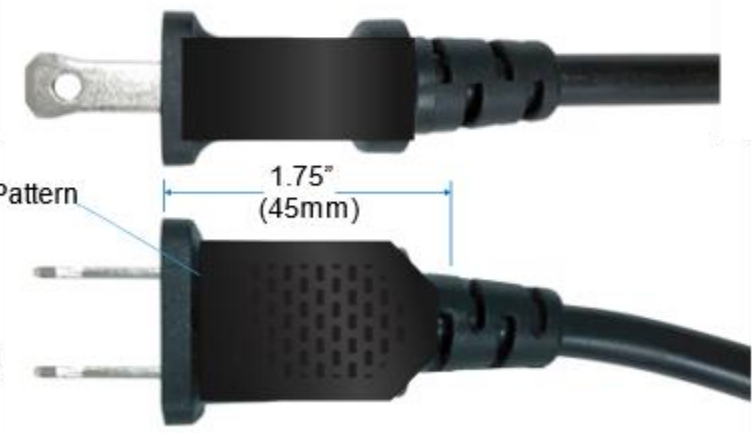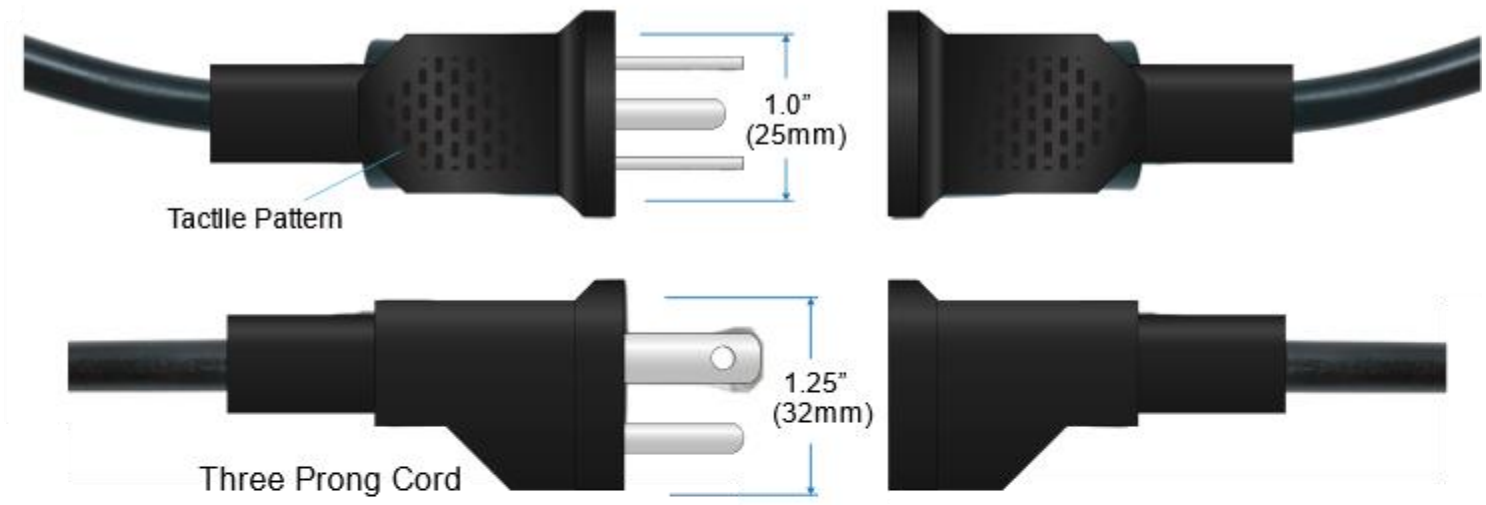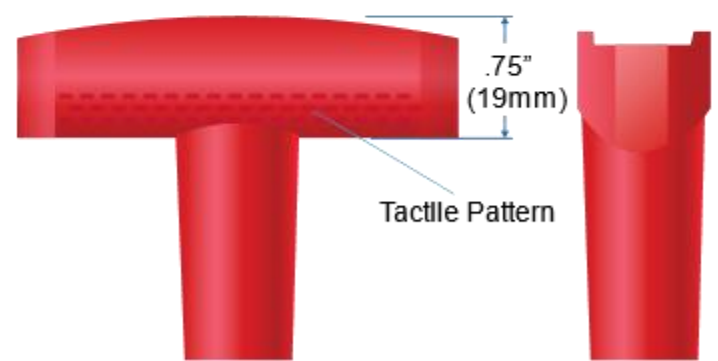

Full Scale

PRODUCT EXAMPLES

AUTOMOTIVE

AUTOMOTIVE

COMPRESSOR



AUTOMOTIVE

GLOVES



AUTOMOTIVE

JACKS



AUTOMOTIVE

PNEUMATICS



AUTOMOTIVE

POWERWASHER



Wheels same



AUTOMOTIVE

WORK LIGHTS



PRODUCT EXAMPLES

DIY

DIY

PAINT ACCESSORIES



LADDERS











PRODUCT EXAMPLES

HARDWARE


HARDWARE

ELECTRICAL CORDS

ELECTRICAL USES INDUSTRY STANDARD COLORS FOR CORDS



**HIGH VISIBILITY
ONLY**



HARDWARE

ELECTRICAL POWER SURGE



UTILITY SURGE USES VBL COLORS

HARDWARE

GLOVES



HARDWARE


GLOVES



Never expand the Hyper Tough
Socket shape to include
additional text or content.

HARDWARE


HAND TOOLS

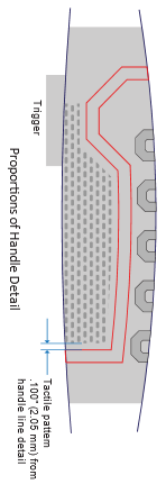

Socket pattern



Updated Logo

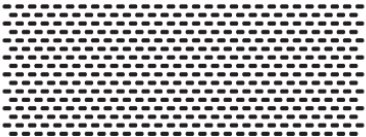

Socket shape Cut Out



Updated Logo

Socket shape hole

HARDWARE

HAND TOOLS



HARDWARE

HAND TOOLS



HARDWARE

HAND TOOLS



HARDWARE


POWER TOOLS



HARDWARE POWER TOOLS

BRUSHLESS (Enhanced Motor) 12v Power Tools

- Hyper Tough Grey color accent (30-40%, Optimal 35%)
- Red touchpoints and red handle line detail
- Back of 12v battery, graphic with Hyper Tough design. Size: 1.45" wide, .43" high
- Contact Brand Manager for art files.

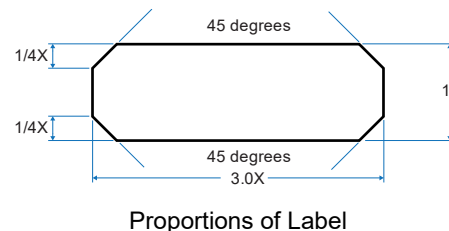

Touch points red:
Trigger and switch

Socket
pattern

Handle detail
including tactile
pattern

Hyper Tough
Grey line detail
at base of handle

Hyper Tough logo in red
inside socket shape

Hyper Tough
Grey
2111525P
2111525PW
2111525TE
2111525-Metal
80% Black

HARDWARE POWER TOOLS

This guidance is for BRUSHLESS products in D11 Power Tools only. See BRUSHLESS products use different guidance.


BRUSHLESS (Enhanced Motor) 12v Power Tools

- Hyper Tough Grey color accents (15-35%, Optimal 20%)
- Black touchpoints and black handle line detail
- *Black handle. BRUSHLESS* callout should appear on back of product. Contact Brand Manager for art files.
- Back of 12v battery, graphic with Hyper Tough. Contact Brand Manager for art files. Size: 1.45" wide, .43" high

Body Mold
BRUSHLESS
FONT:
**Helvetica
Neue 97 Black
Condensed
Oblique**
All Caps
Color: Hyper
Tough White



NEW IMAGE OF HT
BATTERY COMING



Proportions of Label

Socket pattern



Hyper Tough logo
in red inside
socket shape



Black
touchpoints:
Trigger and
switch

Tactile
pattern



Hyper Tough
Grey line detail
at base of handle


**Hyper Tough
Grey**
2111525P
2111525PW
2111525TE
2111525-Metal
80% Black

HARDWARE POWER TOOLS

This guidance is for BRUSHLESS products in D11 Power Tools only. See BRUSHLESS products use different guidance.

20v Power Tools Brushed

- Hyper Tough Silver color accents (15%-35%, Optimal 15%)
- Red touchpoints and red handle line detail
- Back of product, on the 20v battery is a graphic in the socket shape. See proportions below. Contact Brand Manager for art files.

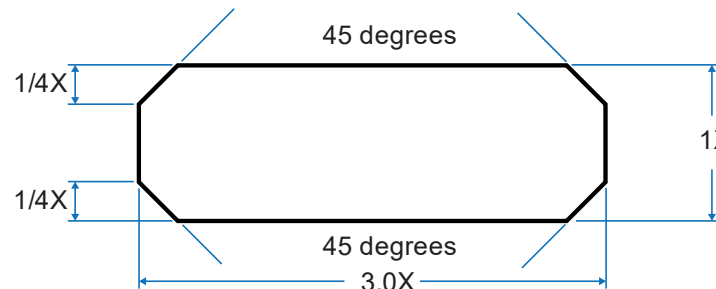

Proportions of Label



HARDWARE POWER TOOLS

This guidance is for BRUSHLESS products in D11 Power Tools only. See BRUSHLESS products use different guidance.

20v Power Tools BRUSHLESS

- Hyper Tough Silver color accents (15%-35%, Optimal 20%)
- Black touchpoints
- Black handle line detail
- *Black handle. BRUSHLESS* should appear on back of product. Contact Brand Manager for art files.
- Back of product, the Amp Hour graphic is inside the socket shape on product. See proportions provided. Contact Brand Manager for art files.

This guidance is for BRUSHLESS products is for D11 only. Other departments with BRUSHLESS products use different guidance.



Hyper Tough
Silver
2111635P - Plastic
2111635A-METAL




Handle Rubber Overmold:

BRUSHLESS appears in ALL CAPS on both sides of handle.
FONT: **Helvetica Neue 97 Black Condensed Oblique**
Color: Hyper Tough White



Body Mold
BRUSHLESS
FONT:
Helvetica Neue 97 Black Condensed Oblique
All Caps
Color: Hyper Tough White

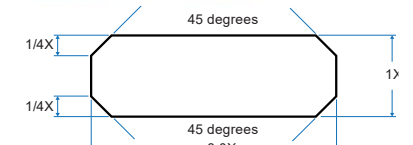

Proportions of Label

HARDWARE POWER TOOLS

This guidance is for BRUSHLESS products in D11 Power Tools only. See BRUSHLESS products use different guidance.

*See separate guidance for BRUSHLESS products.

12v and 20v Accent Colors Guidance

In Hardware, color accent is used to differentiate between battery platforms (12v vs. 20v) and motor type (regular vs. BRUSHLESS*). Color balance will vary by product. See Brand Manager with questions.



Optimal 12v Color Balance – Hyper Tough Grey Accent

Hyper Tough Black: Regular 55%, Brushless 75%

Hyper Tough Grey: Regular 35%, Brushless 20%

Hyper Tough Red: Regular 9%, Brushless 4%

Hyper Tough White: 1% (logo and functional)



Optimal 20v Color Balance – Hyper Tough Silver Accent

Hyper Tough Black: Regular 75%, Brushless 75%

Hyper Tough Silver: Regular 15%, Brushless 20%

Hyper Tough Red: Regular 9%, Brushless 4%

Hyper Tough White: 1% (logo and functional)

HARDWARE

POWER TOOLS



HARDWARE

POWER TOOLS



HARDWARE

POWER TOOLS



HARDWARE

WET DRY VACS



HARDWARE

TAPE MEASURES



Basic Tape Measure



Self Locking Tape Measure



Wide Tape Measure

HARDWARE


TOOL KITS



CLICK FIT™ CONNECTABLE STORAGE SYSTEM

TOOL KIT “CASE”

1. Click Fit™ design must appear molded into the red latches (see design to the right)
 - Horizontal Design: Preferred. More than .5” wide
 - Stacked Design: Less than .5” wide
 - Note: TM is not molded into the latch
2. Product Name: “in Click Fit Case” should appear in the product name, as follows:
“HT 200-Piece Rotary Accessory Set in Click Fit Case”
3. Compatibility statement must appear on all toolkits, on the back panel sticker.
 - Required language: **“Case is compatible with all Hyper Tough Click Fit™ storage cases.”**
 - Compatibility statement must include the TM symbol after the words “Click Fit™”
4. TM must appear at least once on the packaging and once on the product.

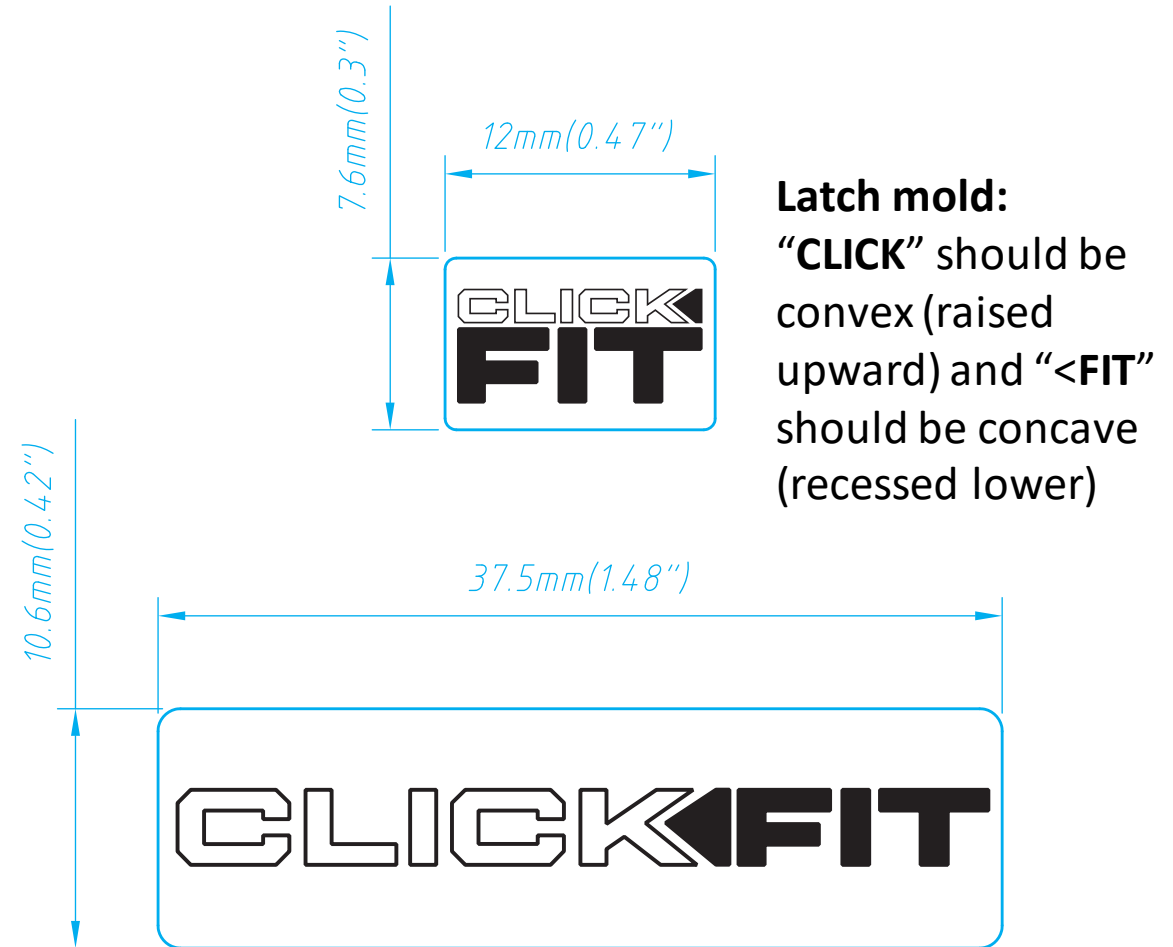

Contact Brand Manager for Click Fit™ design assets.

HARDWARE

UTILITY KNIFE



HARDWARE

TOOL BAGS



Sewn on badge
(molded rubber)
white on red logo

.1875" red
piping details



HARDWARE

TOOLBOX



HARDWARE

WORK LIGHTS



HARDWARE

GARAGE STORAGE



HARDWARE

WIRE SHELVING



Detail



Chrome



Cart



Heavy Duty


HARDWARE

PLASTIC SHELVING



HARDWARE

GARAGE CABINETS

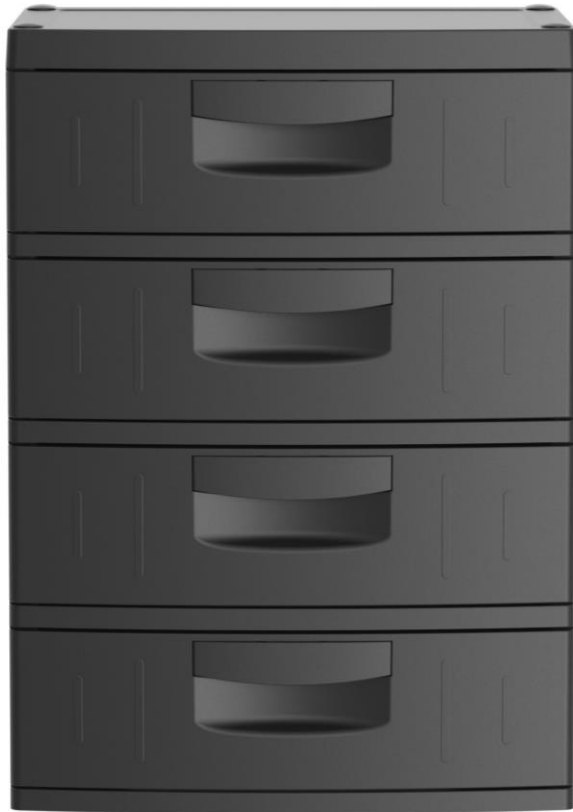

HARDWARE


GARAGE STORAGE ACCESSORIES



Logo debossed on both sides

Logo debossed to the right of red handles on the ends

Socket Pattern

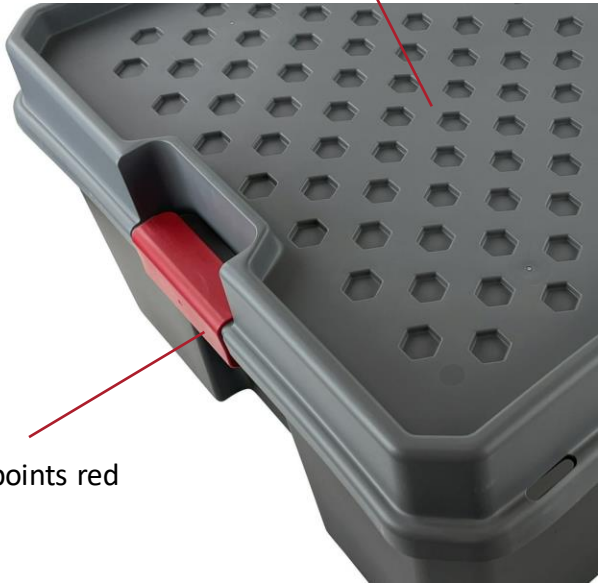

Touch points red


PRODUCT EXAMPLES

HOME

STORAGE BIN



Socket Pattern



Touch points red



PRODUCT EXAMPLES

LAWN & GARDEN

LAWN & GARDEN

GLOVES



LAWN & GARDEN


STRIKING TOOLS



Updated Logo



Socket pattern

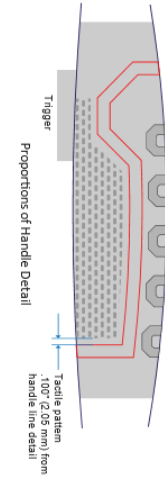

Socket shape hole

LAWN & GARDEN

OUTDOOR POWER EQUIPMENT WHITE LOGO ON BLACK

White Hyper Tough logo on black product is an approved exception to VBL for this category only.



LAWN & GARDEN

GAS MOWERS



LAWN & GARDEN

OUTDOOR POWER EQUIPMENT - CORDED




LAWN & GARDEN

OUTDOOR POWER EQUIPMENT - CORDED




LAWN & GARDEN

TRIMMER – CORDED

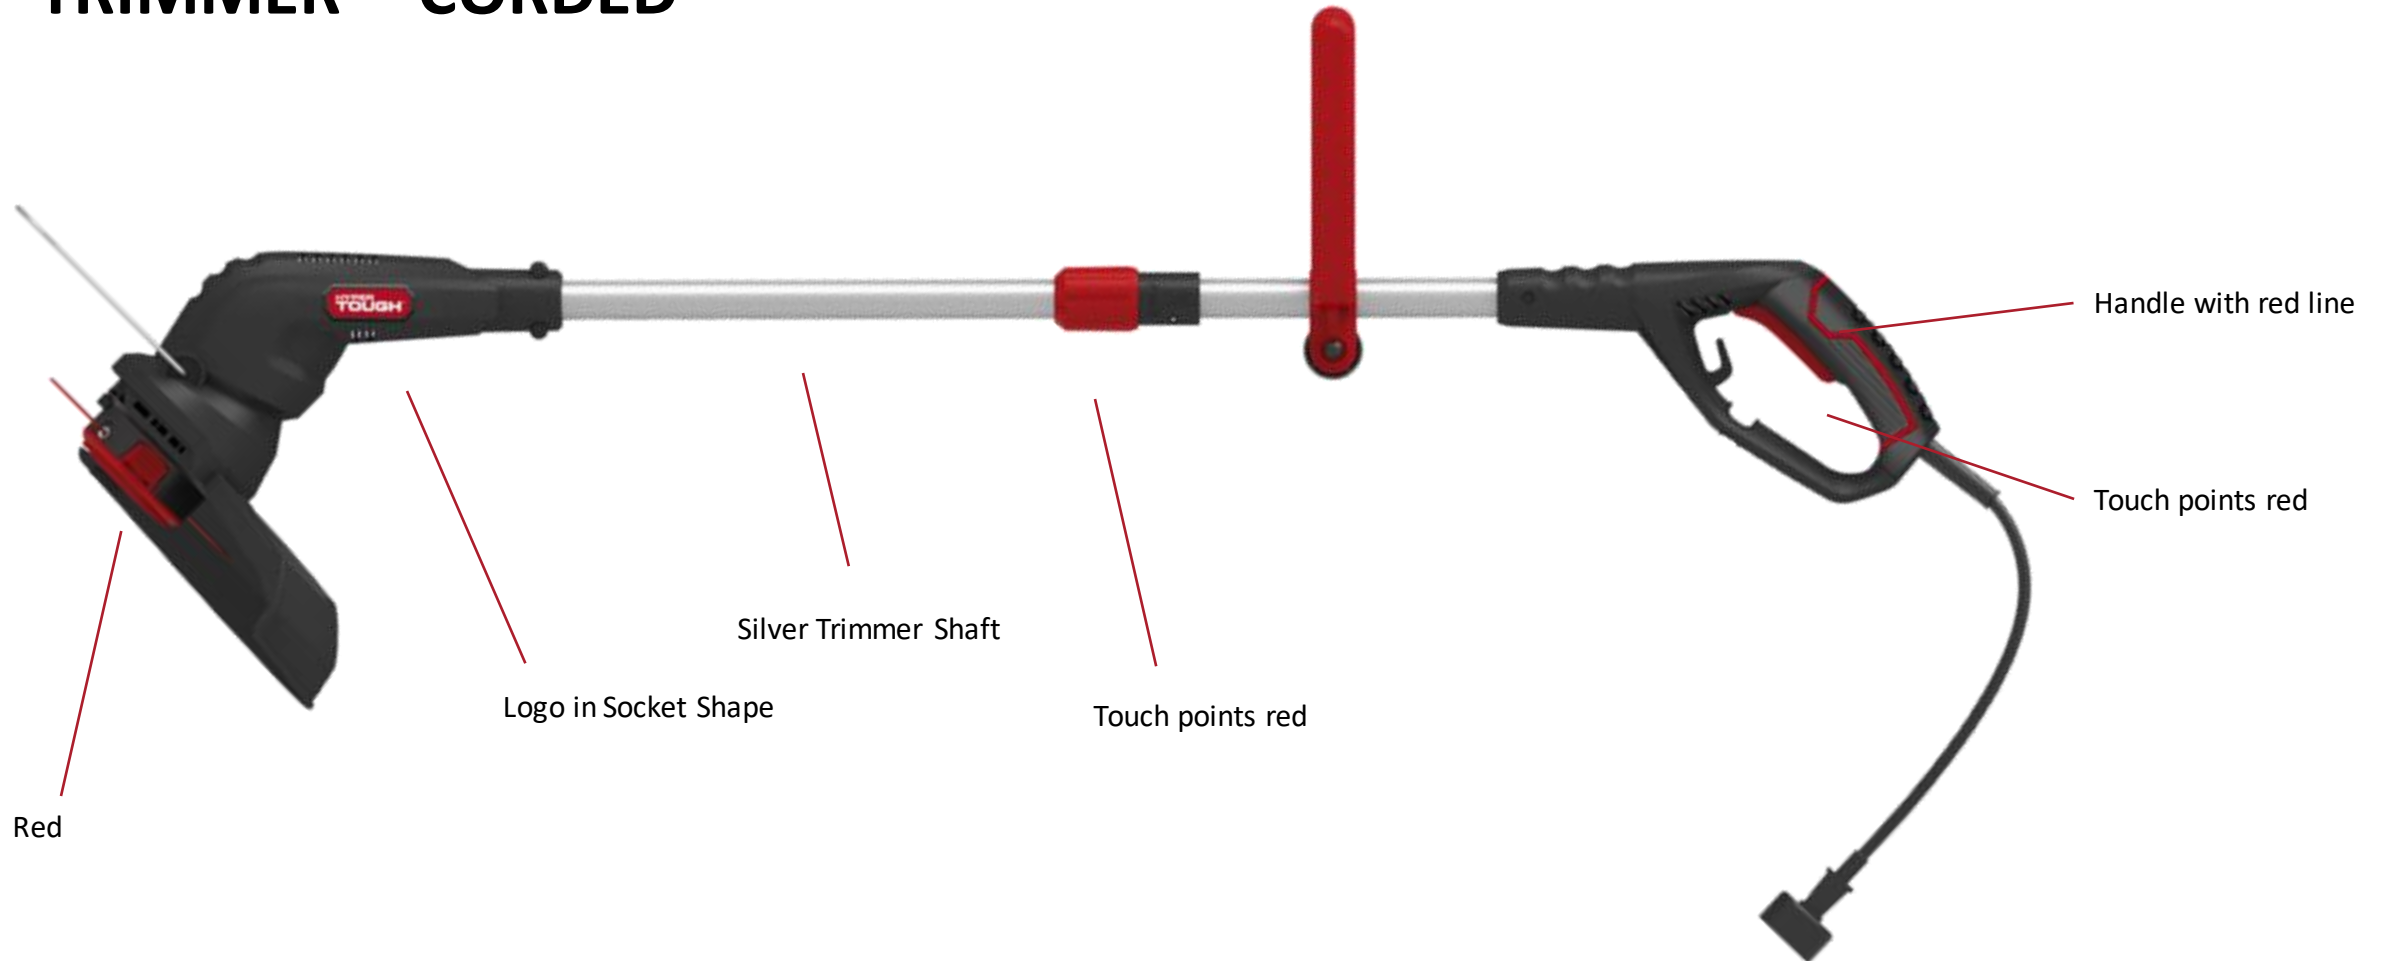

LAWN & GARDEN

OUTDOOR POWER EQUIPMENT – 20V BRUSHED (BASIC MOTOR)

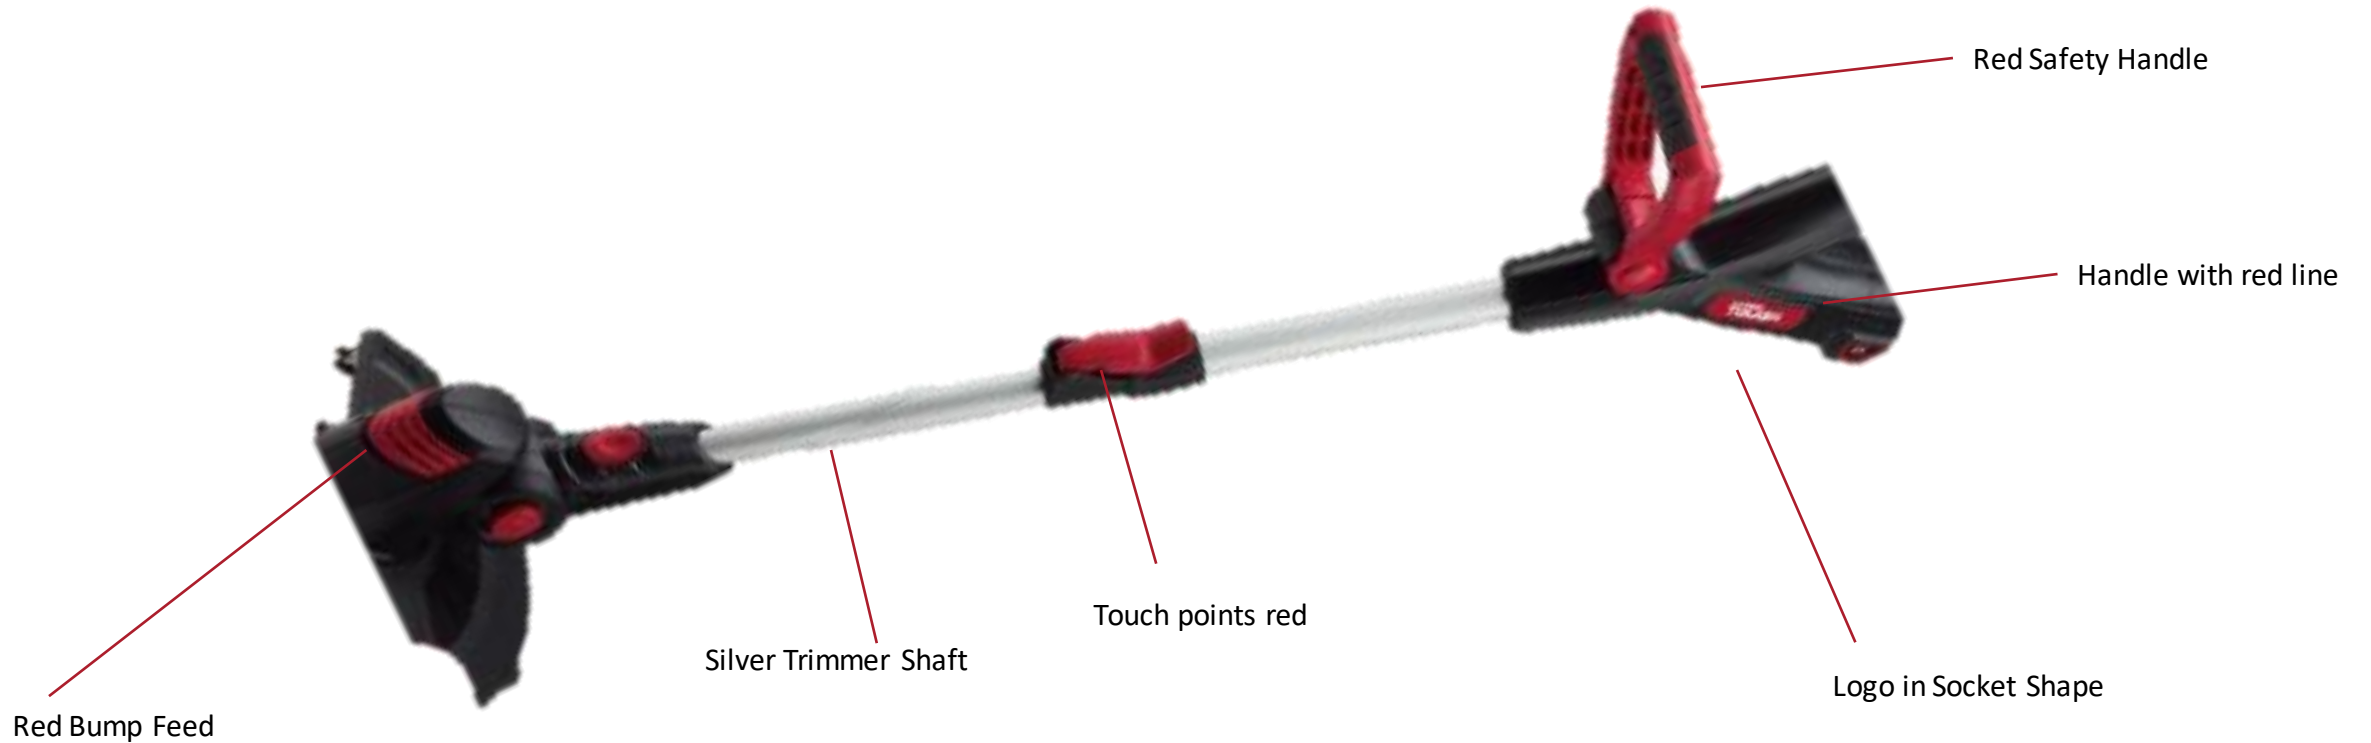

LAWN & GARDEN

BRUSHLESS REQUIREMENTS: OUTDOOR POWER

All BRUSHLESS products must include:

- ✓ Hyper Tough logo in red socket shape
- ✓ Predominantly black color with attractive red accents.
(see color balance)
- ✓ Black line detail on handle
- ✓ Black touchpoints including triggers, buttons, knobs, caps. Black shafts.
- ✓ Pull cords and required safety elements should be red.
- ✓ The word “BRUSHLESS” must appear on the product.

This guidance is for BRUSHLESS products is for D16 Outdoor Power only. Other departments with BRUSHLESS products use different guidance.



LAWN & GARDEN

BRUSHLESS REQUIREMENTS: OUTDOOR POWER

“BRUSHLESS” CALL OUT ON PRODUCT

- **PLACEMENT:**
- BRUSHLESS should appear on both sides of product when product has two sides.
- BRUSHLESS graphic shouldn't visually overpower the HT Brand.
- 1.5" Wide
- **FONT USE:**
 - "BRUSHLESS" font is **HELEVETICA NEUE LT STD – 87 HEAVY CONDENSED, ALL CAPS**
 - "BRUSHLESS" font should not be stretched out of proportion
 - The word "BRUSHLESS" must be **EMBOSSSED**, raised .8mm millimeter.
 - "BRUSHLESS" font color should be Hyper Tough White on black product.



LAWN & GARDEN

OUTDOOR POWER EQUIPMENT – BRUSHLESS

- BRUHSLESS callout:. Embossed on both sides, raised 0.8mm
- Font: All caps, HELEVETICA NEUE LT STD – 87 HEAVY CONDENSED
- Color: White
- Width: 1.5” wide
- Red accent on bump feed knob.



LAWN & GARDEN

BRUSHLESS COLOR BALANCE

- Hyper Tough 20v BRUSHLESS products should be predominantly black with black touchpoints.
- Red is used for safety features and for small, stylist accents
- Large areas of metal should be black

Optimal* BRUSHLESS Color Balance

- 85%-95% Hyper Tough Black
- Less than 10% Hyper Tough Red
- Less than 5% Hyper Tough White (logo and functional)

*Color balance will vary by product and percentages are for reference only.

