
# simple_earring — generated schematic (regenerate: python3 build.py --only schematic)

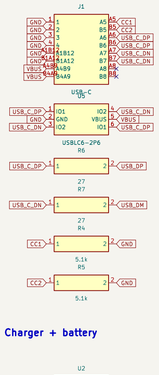
Connections are shown as GLOBAL NET LABELS, not wires — same-named labels are the same net. Every component is drawn, so this sheet can drive the PCB. Generated from scripts/circuit.py; do not hand-edit.

122 components / 81 nets / 4-layer stackup / MCU RP2350A + W25Q16JV QSPI flash / 45 x SK6805-EC10


## MCU





## USB-C + ESD + series R





## 3V3 LDO + power switch





## IMU (I2C1)





## QSPI flash + BOOTSEL




## Charger + battery





## VLED load switch





## Debug / test points



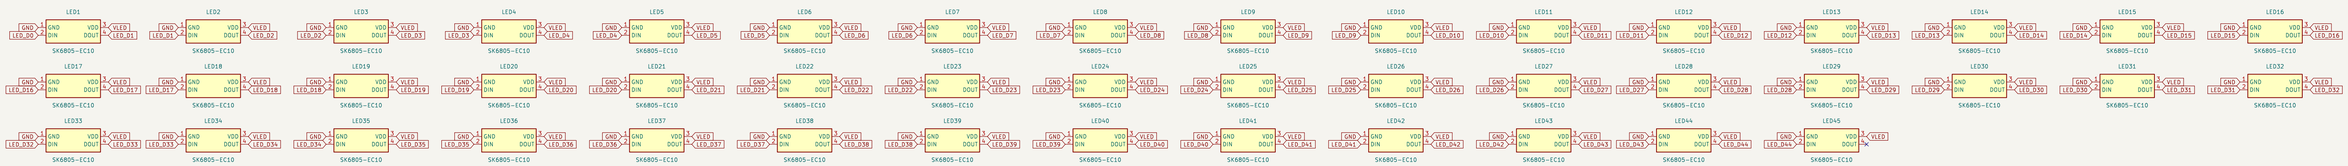

## Crystal





## RP2350 core regulator




## LED ring — SK6805-EC10 chain (DOUT n -> DIN n+1 = LED_D<n>; head LED_D0 from U1; VDD = VLED)  [45]




## LED ring bypass caps — one per 2 LEDs, VLED–GND  [23]




## MCU decoupling — 3V3–GND, one per IOVDD/OTP_VDD/QSPI_IOVDD/ADC_AVDD pin  [8]




| | | |
|---|---|---|
| Sheet: / | | |
| File: earring.kicad_sch | | |
| Title: | | |
| Size: A1 | Date: | Rev: |
| KiCad E.D.A. 9.0.8 | | Id: 1/1 |