
simple_earring — generated schematic (regenerate: python3 build.py --only schematic)


Connections are shown as GLOBAL NET LABELS, not wires — same-named labels are the same net. Every component is drawn, so this sheet can drive the PCB. Generated from scripts/circuit.py; do not hand-edit.

122 components / 81 nets / 4-layer stackup / MCU RP2350A + W25Q16JV QSPI flash / 45 x SK6805-EC10


MCU




USB-C + ESD + series R




3V3 LDO + power switch




IMU (I2C1)




QSPI flash + BOOTSEL




Charger + battery




VLED load switch




Debug / test points




RP2350 core regulator



Crystal



LED ring — SK6805-EC10 chain (DOUT n -> DIN n+1 = LED_D<n>; head LED_D0 from U1; VDD = VLED) [45]

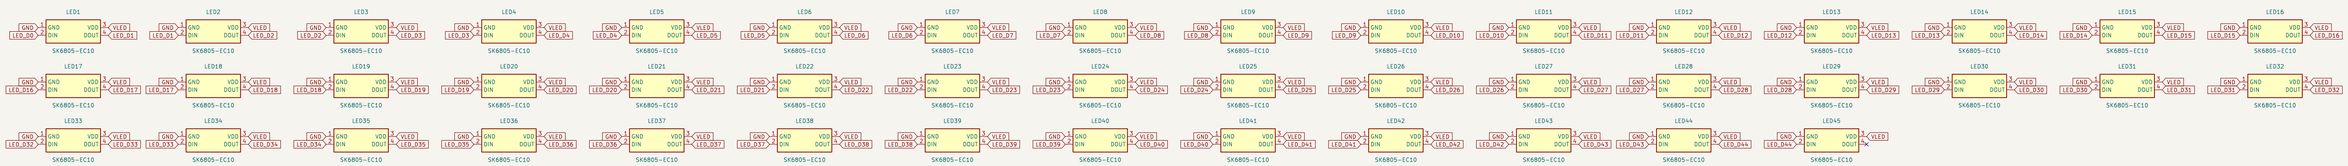

LED ring bypass caps — one per 2 LEDs, VLED–GND [23]



MCU decoupling — 3V3–GND, one per IOVDD/OTP_VDD/QSPI_IOVDD/ADC_AVDD pin [8]



Sheets: /		
File: earring.kicad_sch		
Title:		
Size: A1	Date:	Rev:
KiCad E.D.A. 9.0.8		Id: 1/1