




Section A-A (y = 0), from the front; outboard to the right

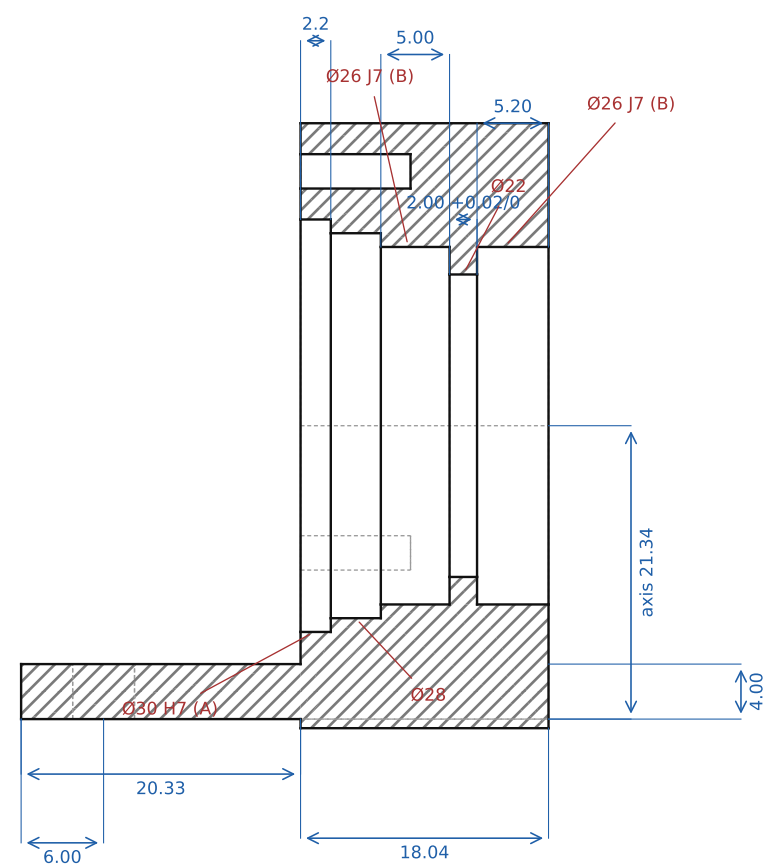


View from inboard (motor side)

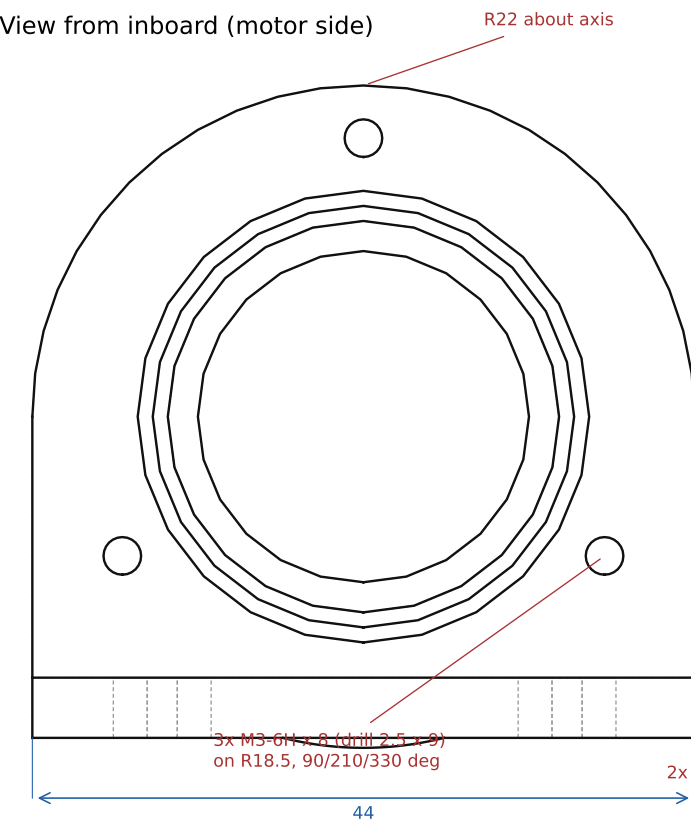

Top view

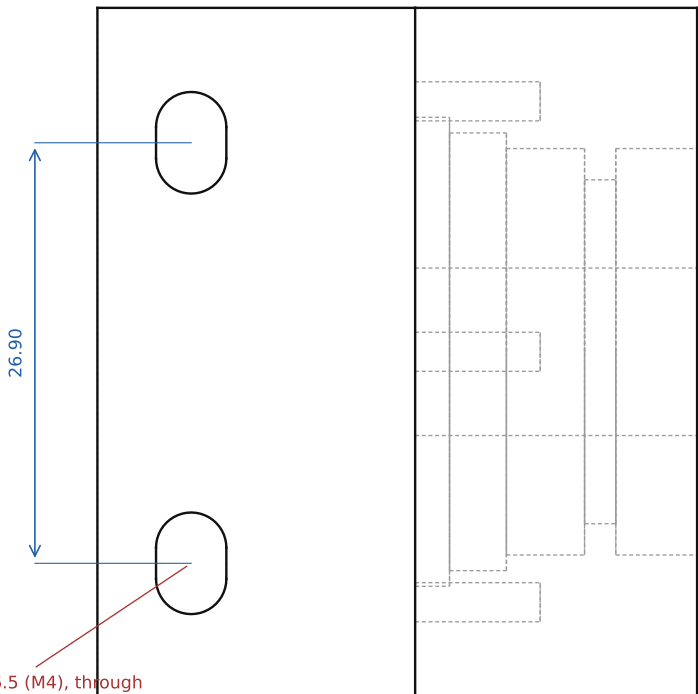

View from outboard (wheel side)

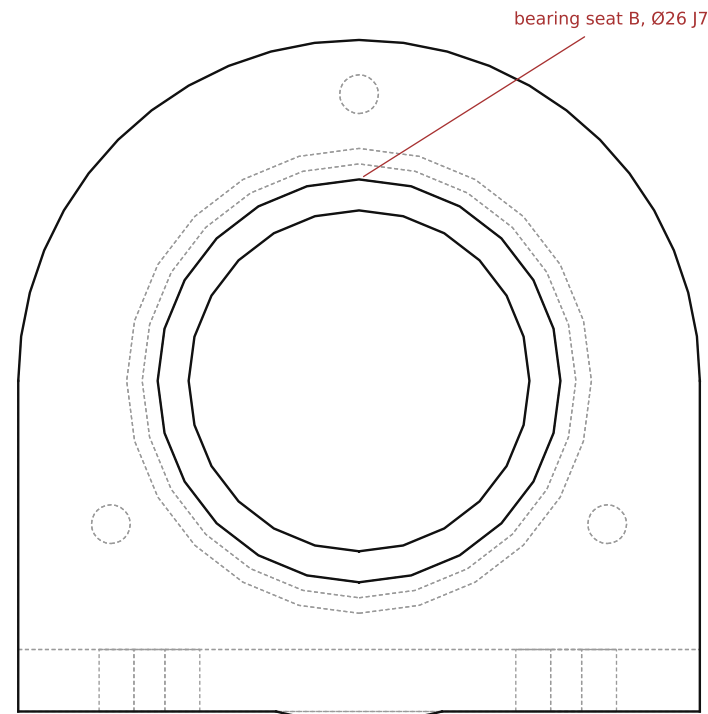

Rear drive bracket (6061-T6, CNC) - robot-left part

Material: aluminium 6061-T6. Finish: bead blast + clear or black anodise (Type II). Break sharp edges 0.2-0.3.
General tolerances ISO 2768-mK. Units mm. One part per side: the right-hand part is the mirror image (STEP: bracket.step is the robot-left part).
Datum A: spigot seat Ø30 H7. Machine Ø30 H7, Ø28 and the inboard bearing seat in one setup; flip and bore the outboard seat to the same axis.
Both bearing seats Ø26 J7 (-0.009/+0.012), coaxial to A within Ø0.02; shoulder width 2.00 +0.02/0 (inner-ring spacer is 2.00 0/-0.02).
Inboard face perpendicular to A within 0.02. Bearings: SKF 61803-2RS1, Loctite 641 on the outer rings.
Axis height: 21.34 above the foot bottom (17.34 above the foot top, which bears on the underside of deck 1).
Print variant (bracket_print.3mf): same shape, bores +0.10, M3 heat-set inserts Ø4.0 x 6 instead of the tapped holes.

	Feature	Size / fit	Tolerance / check
A	Spigot seat	Ø30 H7 (0/+0.021) x 2.2 deep	datum A
B	Bearing seats x2	Ø26 J7 (-0.009/+0.012) x 5.0	coaxial Ø0.02 to A
C	Shoulder	Ø22, width 2.00 +0.02/0	faces parallel 0.01
D	Cavity	Ø28 x to bearing seat	ISO 2768-m
E	Flange screws	3x M3-6H, 8 deep, R18.5	position Ø0.1 to A
F	Foot slots	2x 4.5 x 6.5, 2 mm travel along y	26.90 pitch = deck 1 M4 holes
G	Foot top	flat 0.05	bears on deck 1