




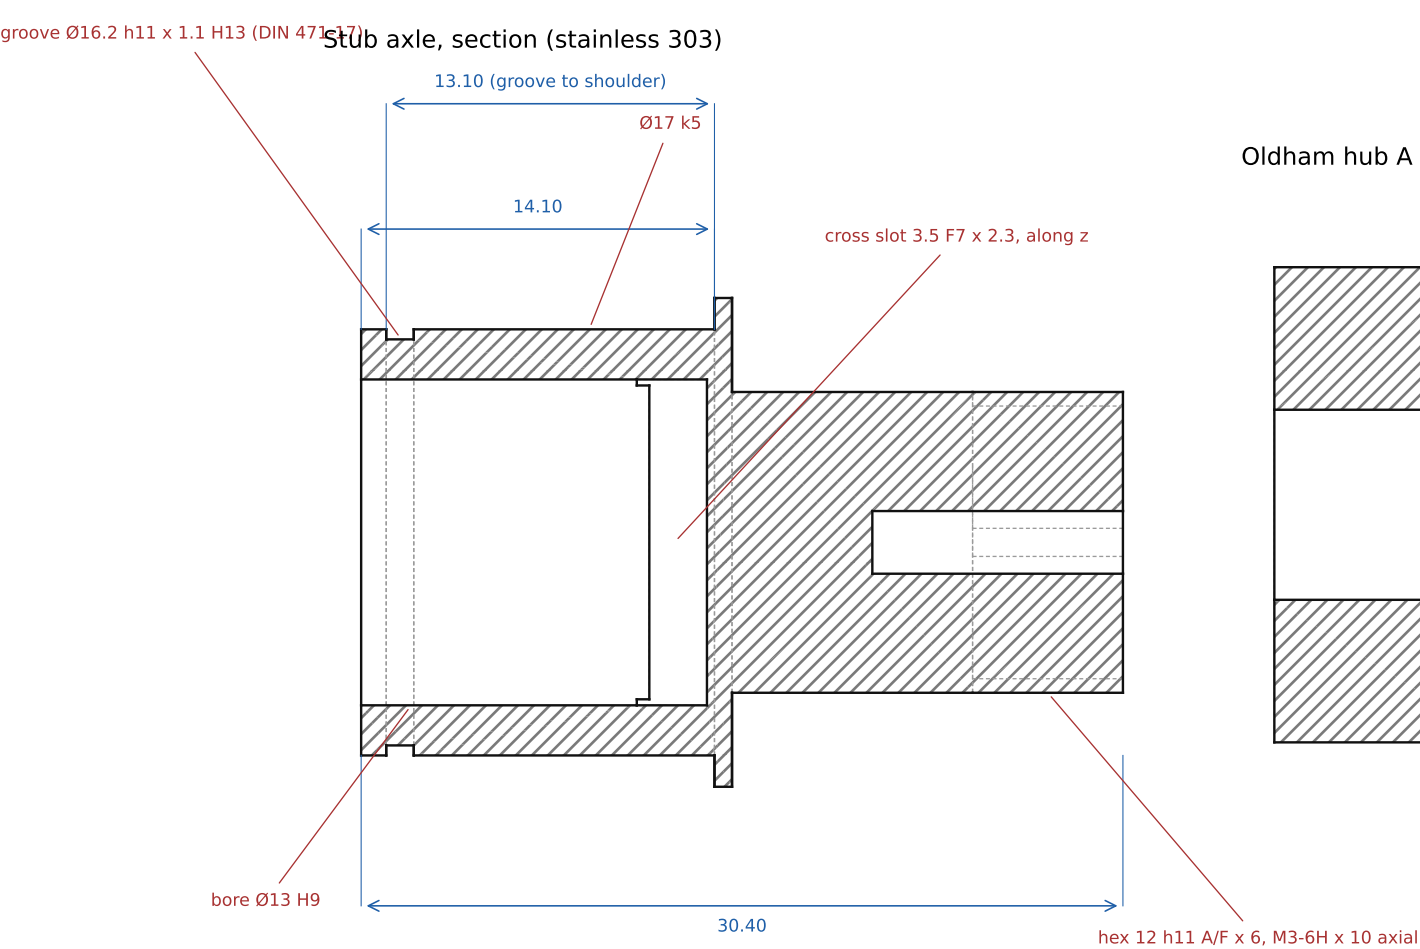

Oldham hub A (stainless 303), bore $\varnothing 4$ H7

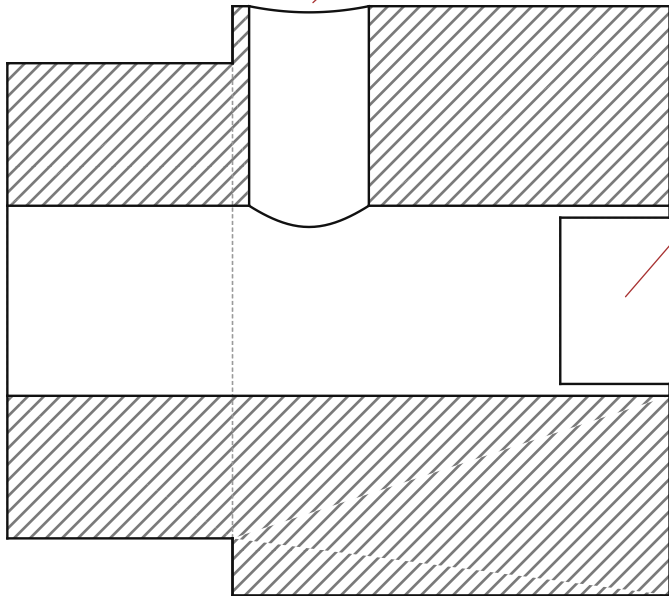

Oldham disc (PEEK), from outboard

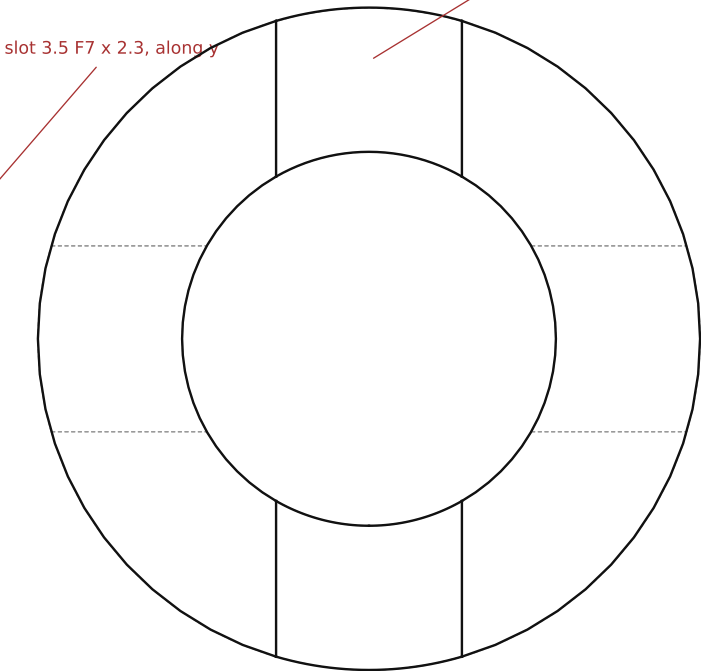

Inner-ring spacer (stainless), 2.00 0/-0.02



Stub axle and Oldham coupling

Stub axle: stainless 303 (or 17-4PH H1150), turned + milled. $\varnothing 17$ k5 (+0.001/+0.009) bearing seat, Ra 0.8.
Hex 12 A/F x 6 and the M3 axial thread take the kit wheel exactly as the kit hub did (wheel screw M3 x 8 + washer).
Oldham: hub A on the gearhead shaft, PEEK disc, cross slot in the stub bore; radial float 0.3 mm, slots F7 / tongues h7.
Hub A: bore $\varnothing 4$ H7, M3 x 3 cup-point set screw on the shaft flat (Loctite 243), set before the motor goes in.
General tolerances ISO 2768-mK. Coaxiality of $\varnothing 17$ k5, $\varnothing 12$ collar and hex within $\varnothing 0.02$.

	Feature	Size / fit	Tolerance / check
A	Bearing seat	$\varnothing 17$ k5	datum A, Ra 0.8
B	Shoulder	$\varnothing 19.5$ x 0.7	perpendicular 0.01 to A
C	Circlip groove	$\varnothing 16.2$ h11 x 1.1 H13	outboard flank 12.00 +0.05/0 from B
D	Bore	$\varnothing 13$ H9, blind	coaxial $\varnothing 0.05$
E	Oldham slot	3.5 F7 x 2.3	symmetric 0.02 to A
F	Hex	12 h11 A/F x 6, M3-6H x 10	kit wheel
G	Hub A bore	$\varnothing 4$ H7	slot 3.5 F7, symmetric 0.02