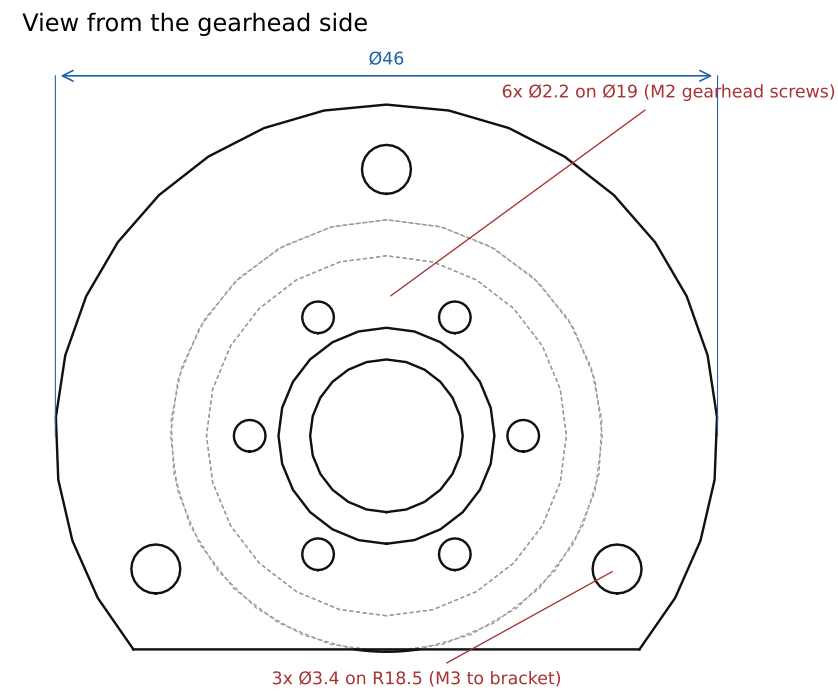
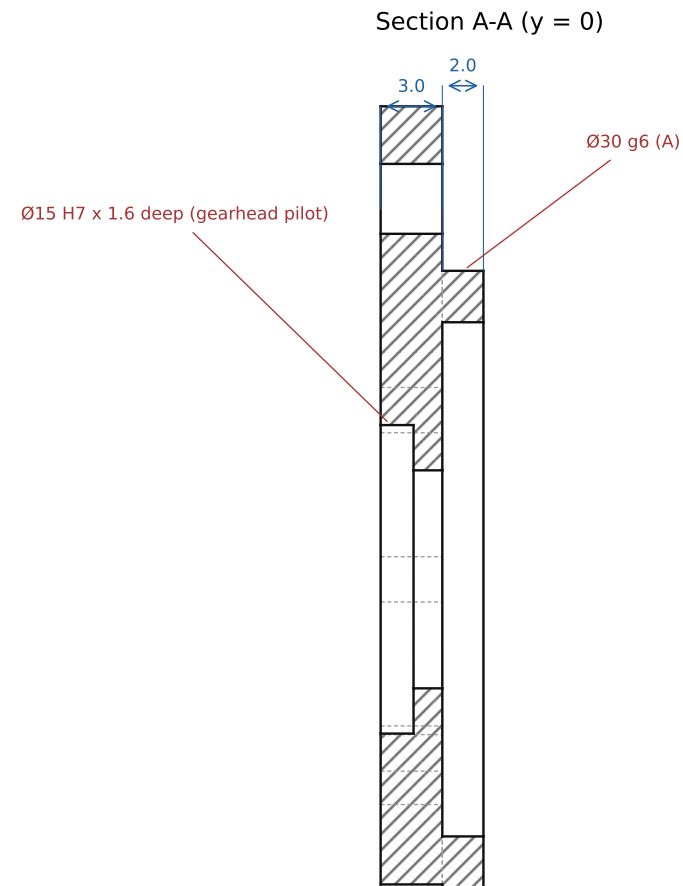


Motor flange - faulhaber

Motor flange for the Faulhaber 3216W012BXTH + IEF3-4096 + 22GPT 11:1.

Material: aluminium 6061-T6, turned + drilled. General tolerances ISO 2768-mK. Break edges 0.2.

Spigot Ø30 g6 (-0.007/-0.020) and pilot pocket coaxial within Ø0.02 (one setup). Flat bottom 0.5 mm above deck 1.

Gearhead screws: 6x M2 DIN 7984 (low head) from the spigot side, Loctite 243.

The other motor's flange: motor_flange_<maker>.step (same outline, different pilot and screw circle).

	Feature	Size / fit	Tolerance / check
A	Spigot	Ø30 g6 x 2.0, bore Ø25	datum A
B	Gearhead pilot pocket	Ø15 H7 x 1.6	coaxial Ø0.02 to A
C	Gearhead screws	6x Ø2.2 on Ø19	position Ø0.05 to B
D	Bracket screws	3x Ø3.4 on R18.5 at 90/210/330	position Ø0.1 to A
E	Faces	parallel 0.02	gearhead face perpendicular to A 0.02