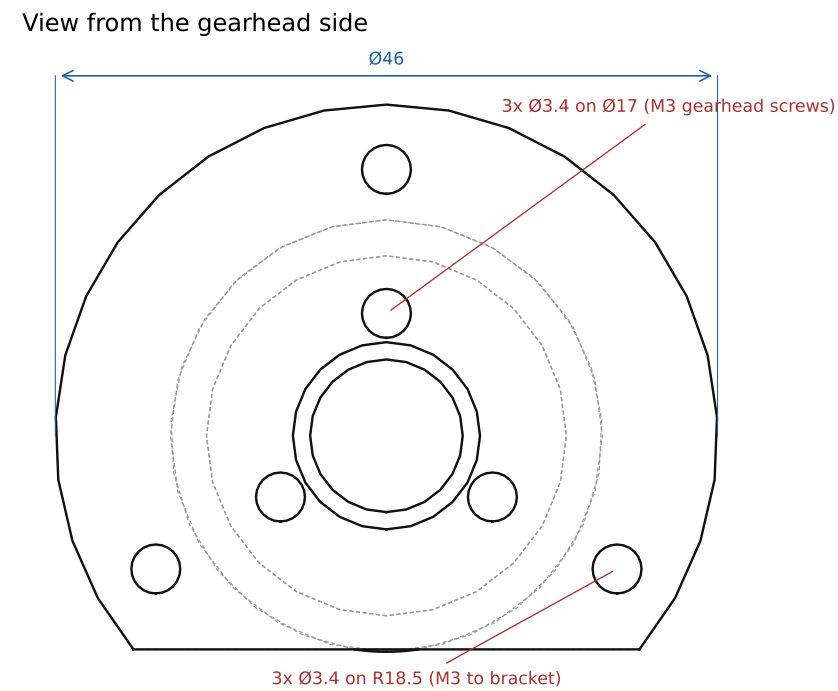
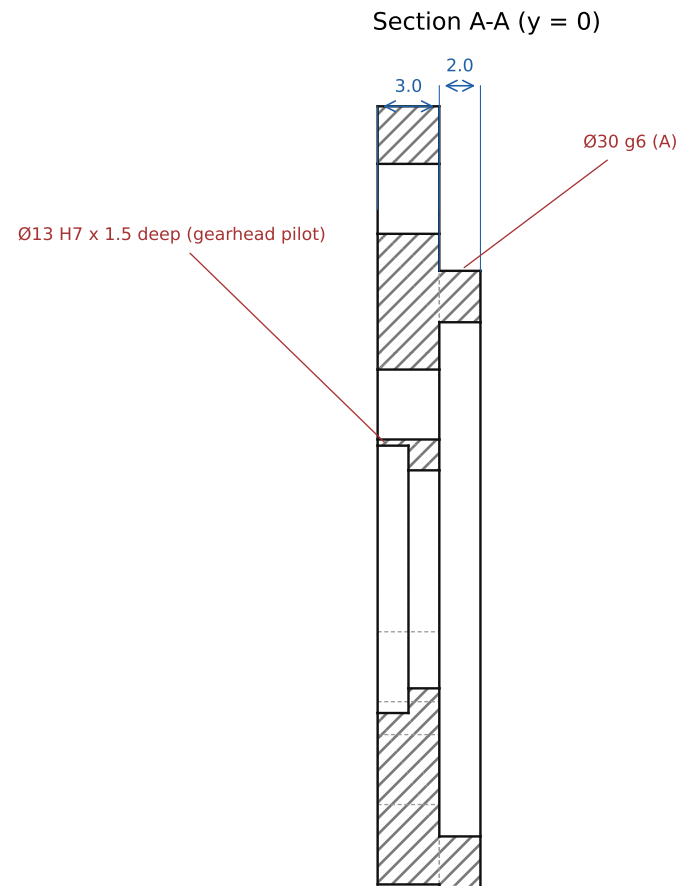


Motor flange - maxon

Motor flange for the maxon ECX FLAT 22 L 18 V (sealed) + GPX 22 LN 16:1 + ENX 22 MILE 1024.
 Material: aluminium 6061-T6, turned + drilled. General tolerances ISO 2768-mK. Break edges 0.2.
 Spigot Ø30 g6 (-0.007/-0.020) and pilot pocket coaxial within Ø0.02 (one setup). Flat bottom 0.5 mm above deck 1.
 Gearhead screws: 3x M3 DIN 7984 (low head) from the spigot side, Loctite 243.
 The other motor's flange: motor_flange_<maker>.step (same outline, different pilot and screw circle).

	Feature	Size / fit	Tolerance / check
A	Spigot	Ø30 g6 x 2.0, bore Ø25	datum A
B	Gearhead pilot pocket	Ø13 H7 x 1.5	coaxial Ø0.02 to A
C	Gearhead screws	3x Ø3.4 on Ø17	position Ø0.05 to B
D	Bracket screws	3x Ø3.4 on R18.5 at 90/210/330	position Ø0.1 to A
E	Faces	parallel 0.02	gearhead face perpendicular to A 0.02