
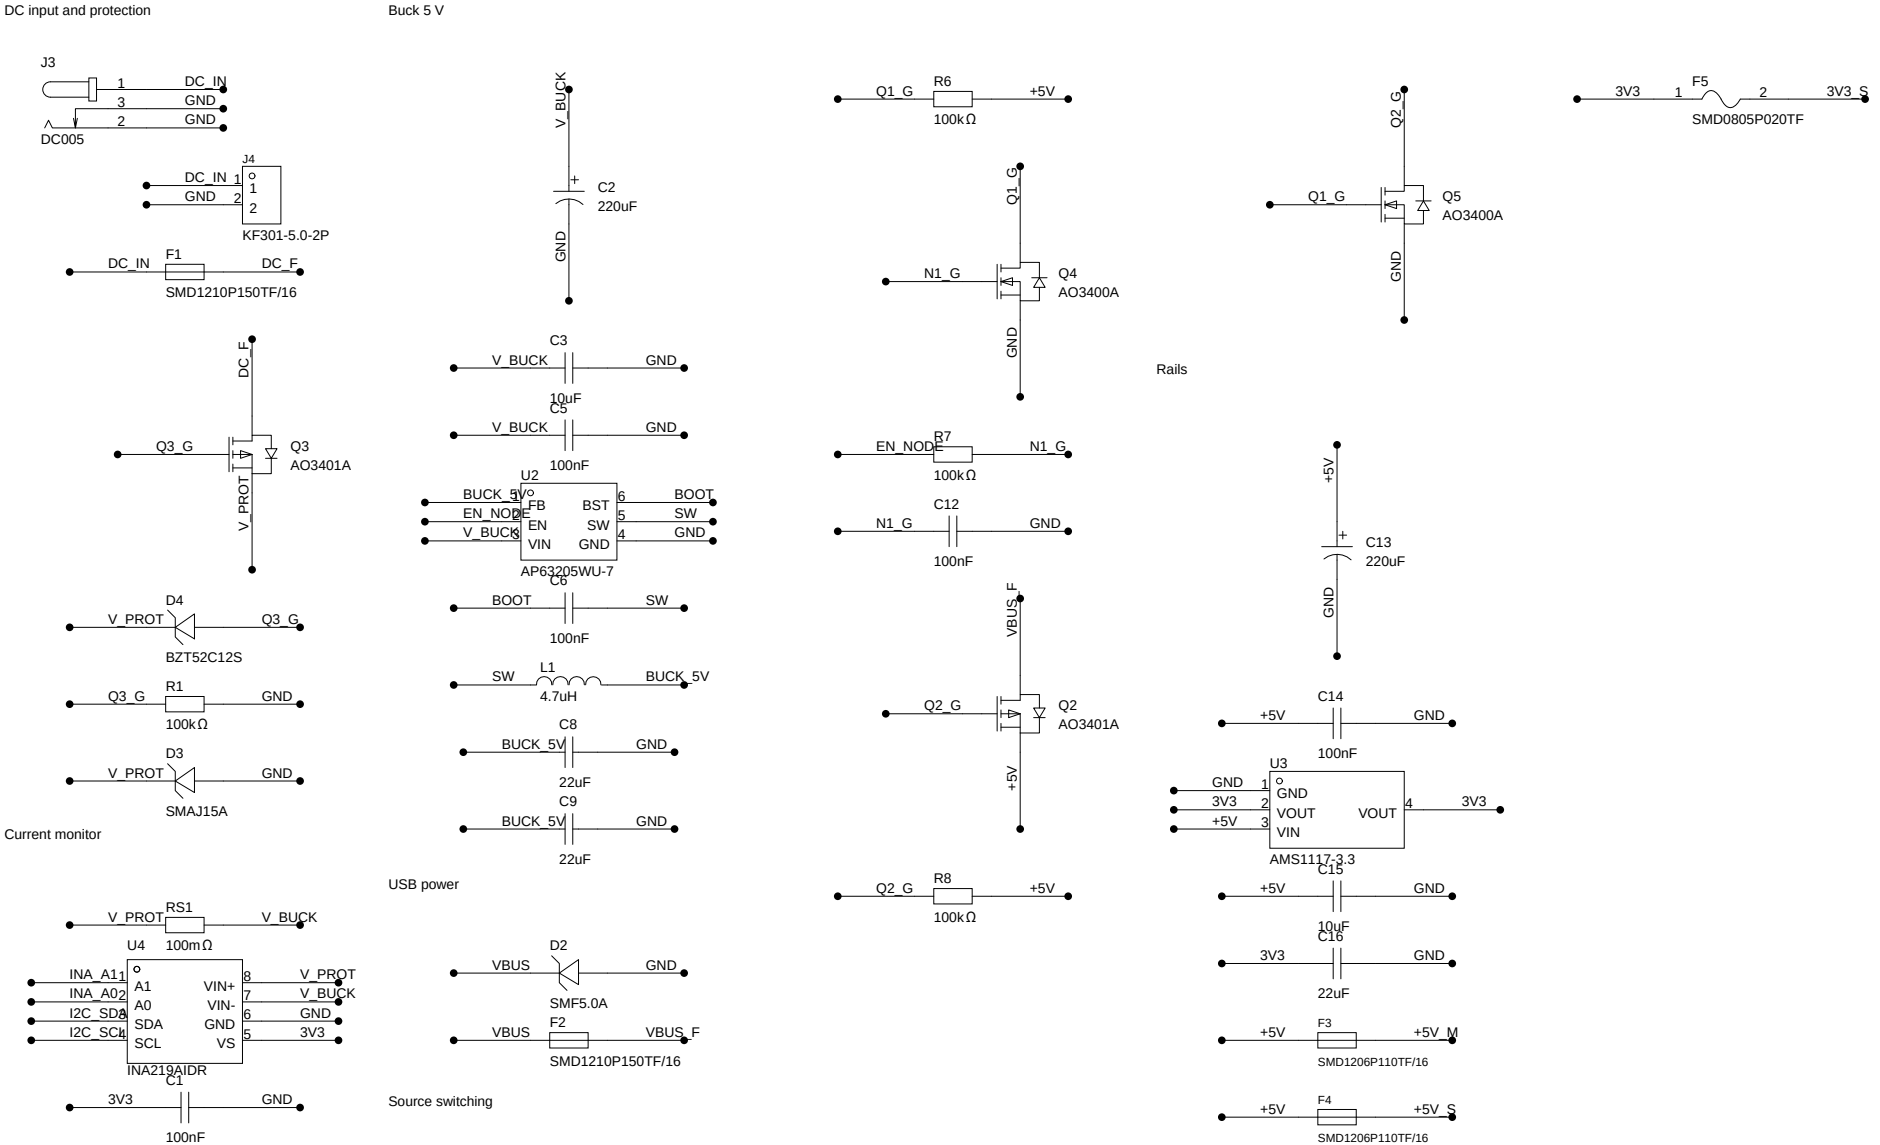



Schematic	Schematic1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	Power
Drawn		Air360_V2.2	
Reviewed			
		Version	Size	Page 1 Total 5
EasyEDA		V1.0	A4	EasyEDA.com

Monitor supply

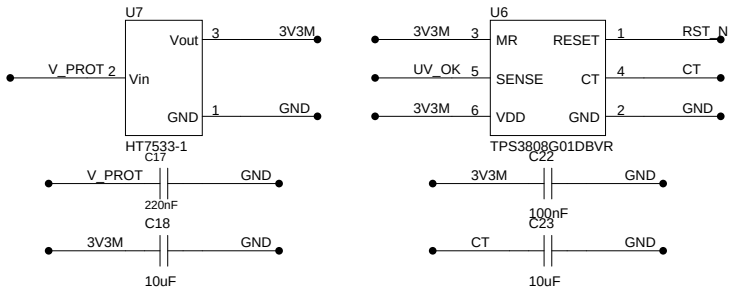


Restart delay and enable

Threshold

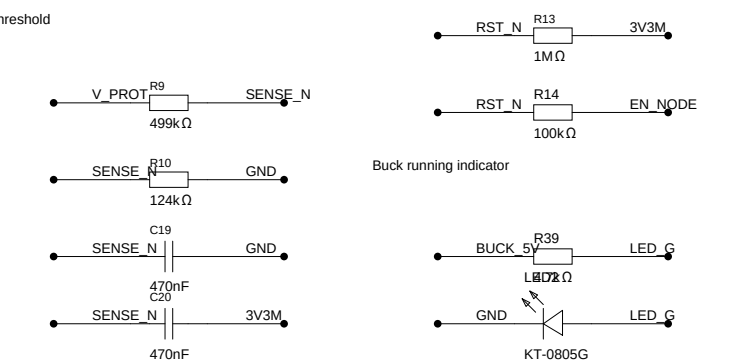


Buck running indicator

Test points: VREF, EN_NODE, GND

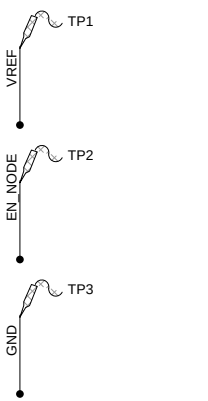




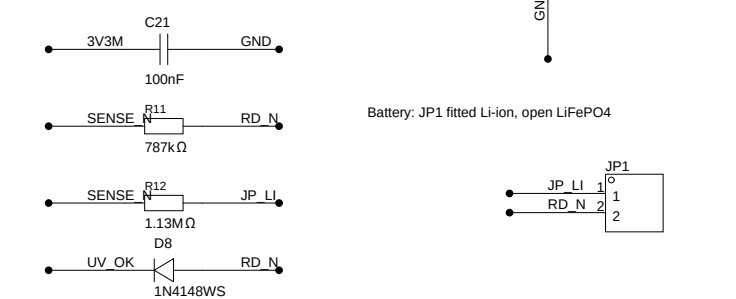


Battery: JP1 fitted Li-ion, open LiFePO4

Schematic	Schematic1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	UVLO
Drawn		Air360_V2.2	
Reviewed			
		Version / Size / Page 2 Total 5	
EasyEDA		V1.0 / A4	EasyEDA.com


ESP32-S3

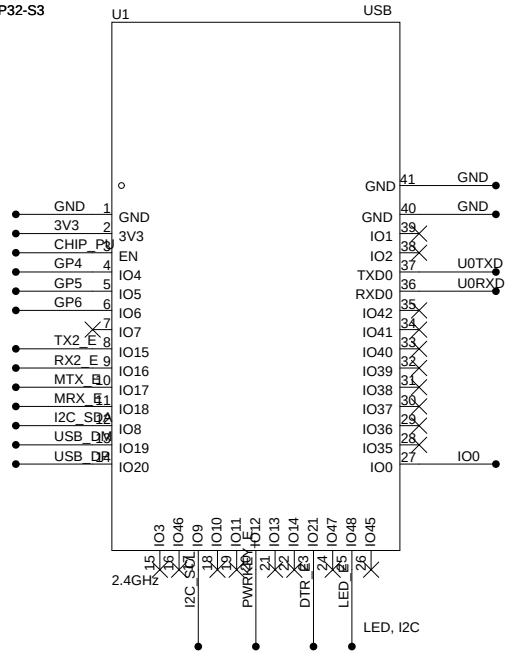



USB

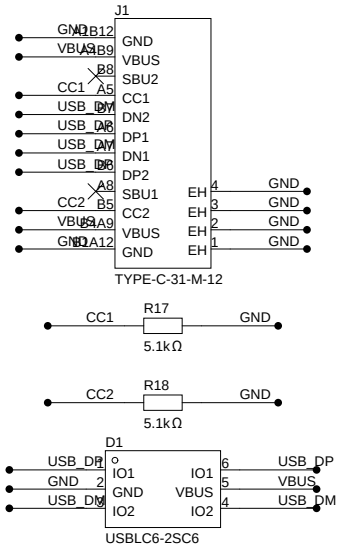


LED, I2C








Reset and boot

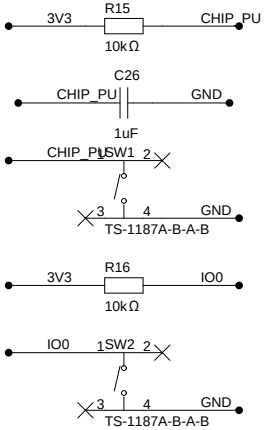



Schematic	Schematic1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	Core
Drawn		Air360_V2.2	
Reviewed			
		Version	Size / Page 3 Total 5
EasyEDA		V1.0	A4 / EasyEDA.com


UART and modem

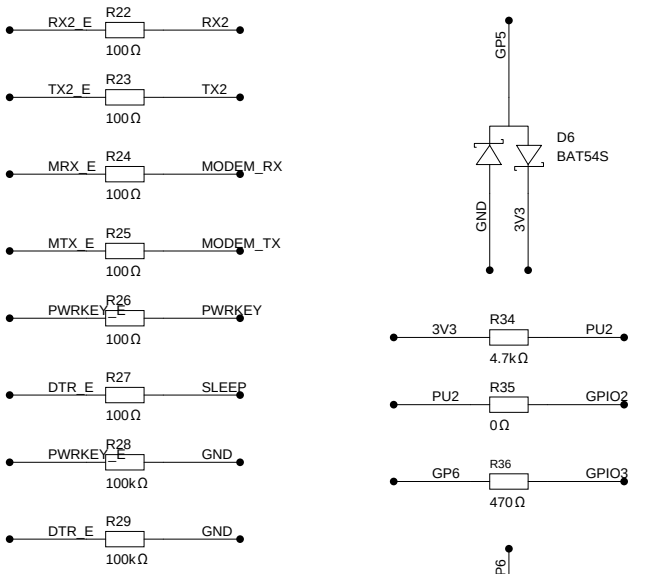



GPIO protection













Debug and spare GPIO




Schematic	Schematic1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	Interfaces
Drawn		Air360_V2.2	
Reviewed			
		Version	Size	Page 4 Total 5
EasyEDA		V1.0	A4	EasyEDA.com


I2C

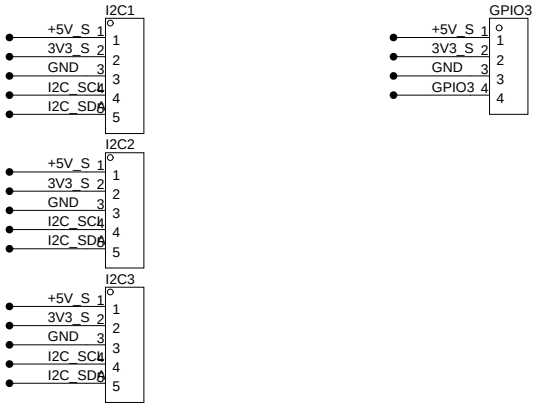


Sensors



UART and modem



GPIO



Schematic	Schematic1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	Connectors
Drawn		Air360_V2.2	
Reviewed			
		Version	Size	Page 5 Total 5
EasyEDA		V1.0	A4	EasyEDA.com