


DC input and protection

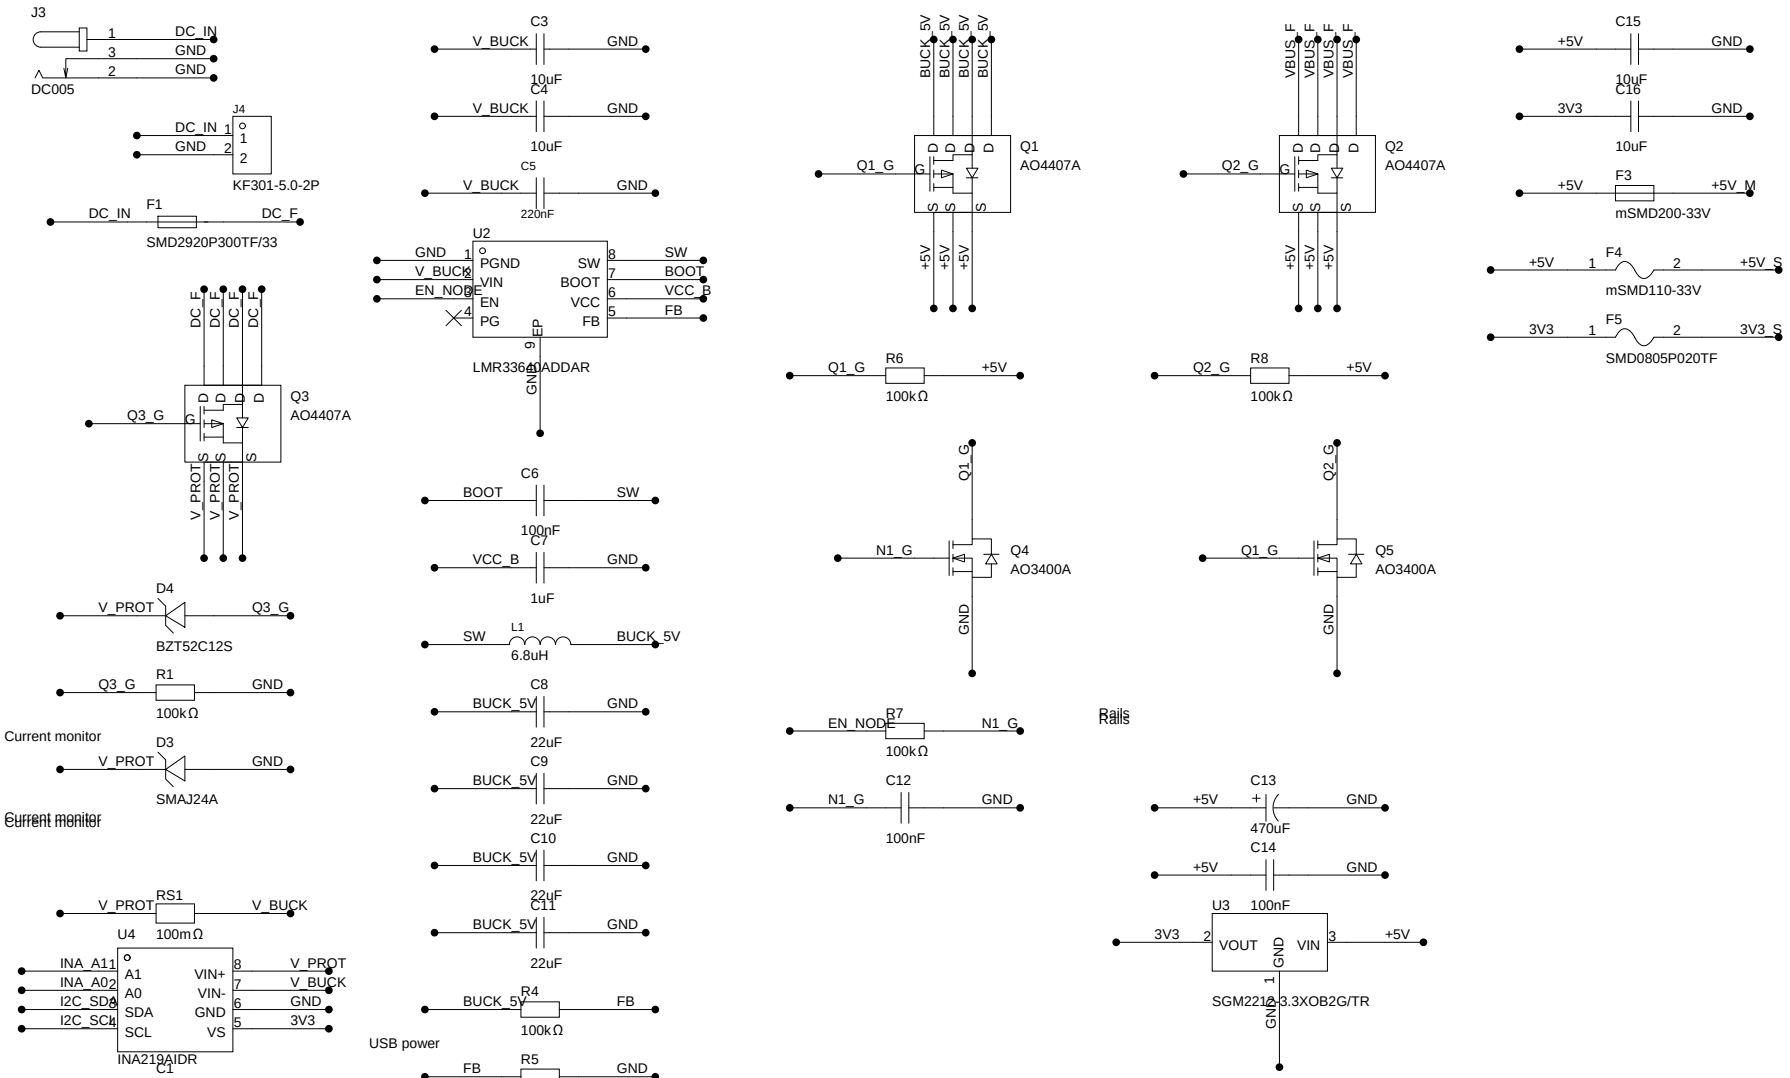


Schematic	Air360_V2.1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	Power
Drawn		Air360_V2.1	
Reviewed			
		Version	Size / Page 1 Total 5
EasyEDA		V1.0	A4 / EasyEDA.com


Monitor supply







Threshold












Restart delay and enable


Restart delay and enable

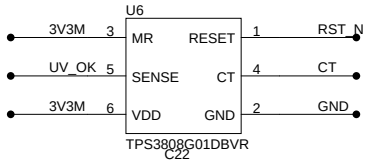




Input profile: 1-2 Li-ion, 3-4 LiFePO4, 5-6 5 V charger






Input profile: 1-2 Li-ion, 3-4 LiFePO4, 5-6 5 V charger


Test points: VREF, EN_NODE, GND




Input profile: 1-2 Li-ion, 3-4 LiFePO4, 5-6 5 V charger




Buck running indicator







Schematic	Air360_V2.1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	UVLO
Drawn		Air360_V2.1	
Reviewed			
		Version / Size	Page 2 Total 5
EasyEDA		V1.0 / A4	EasyEDA.com


ESP32-S3

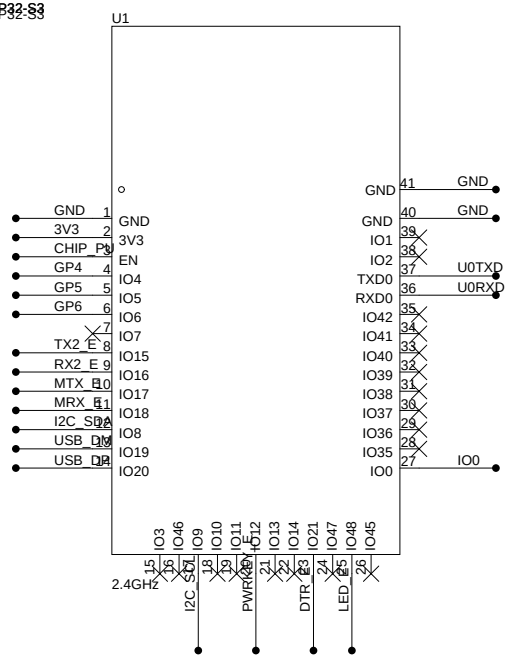


USB














LED, I2C














Reset and boot





Reset and boot




Reset and boot








USB



USB




UART and modem

GPIO protection


Debug and spare GPIO

Schematic	Air360_V2.1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	Core
Drawn		Air360_V2.1	
Reviewed			
		Version / Size / Page 3 Total 5	
EasyEDA		V1.0 / A4	EasyEDA.com


UART and modem

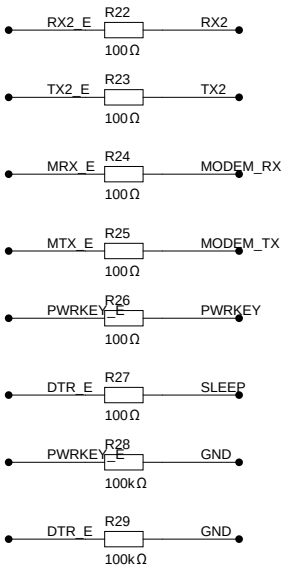


GPIO protection

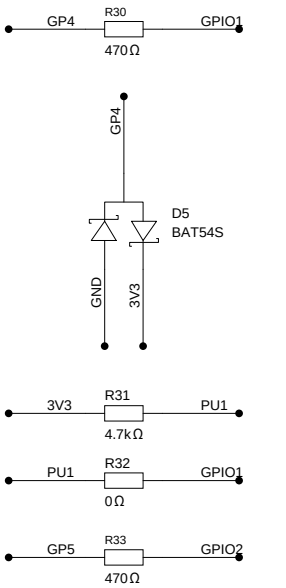

Debug and spare GPIO

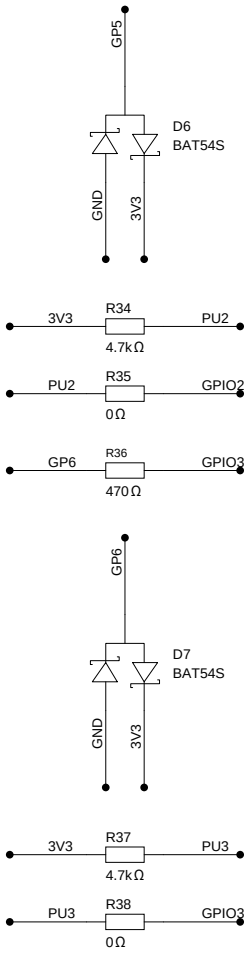



Debug and spare GPIO





Schematic	Air360_V2.1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	Interfaces
Drawn		Air360_V2.1	
Reviewed			
		Version / Size	Page 4 Total 5
EasyEDA		V1.0 / A4	EasyEDA.com

I2C











Sensors


Sensors






UART and modem


UART and modem






GPIO

GPIO





Schematic	Air360_V2.1	Create at	2026-11-04
		Update at	2026-11-04
Board	Board1	Page	Connectors
Drawn		Air360_V2.1	
Reviewed			
		Version	Size	Page 5 Total 5
EasyEDA		V1.0	A4	EasyEDA.com