
ULPI Interface Controller - Detailed Block Diagram (8-bit SDR, 60 MHz, PHY side)

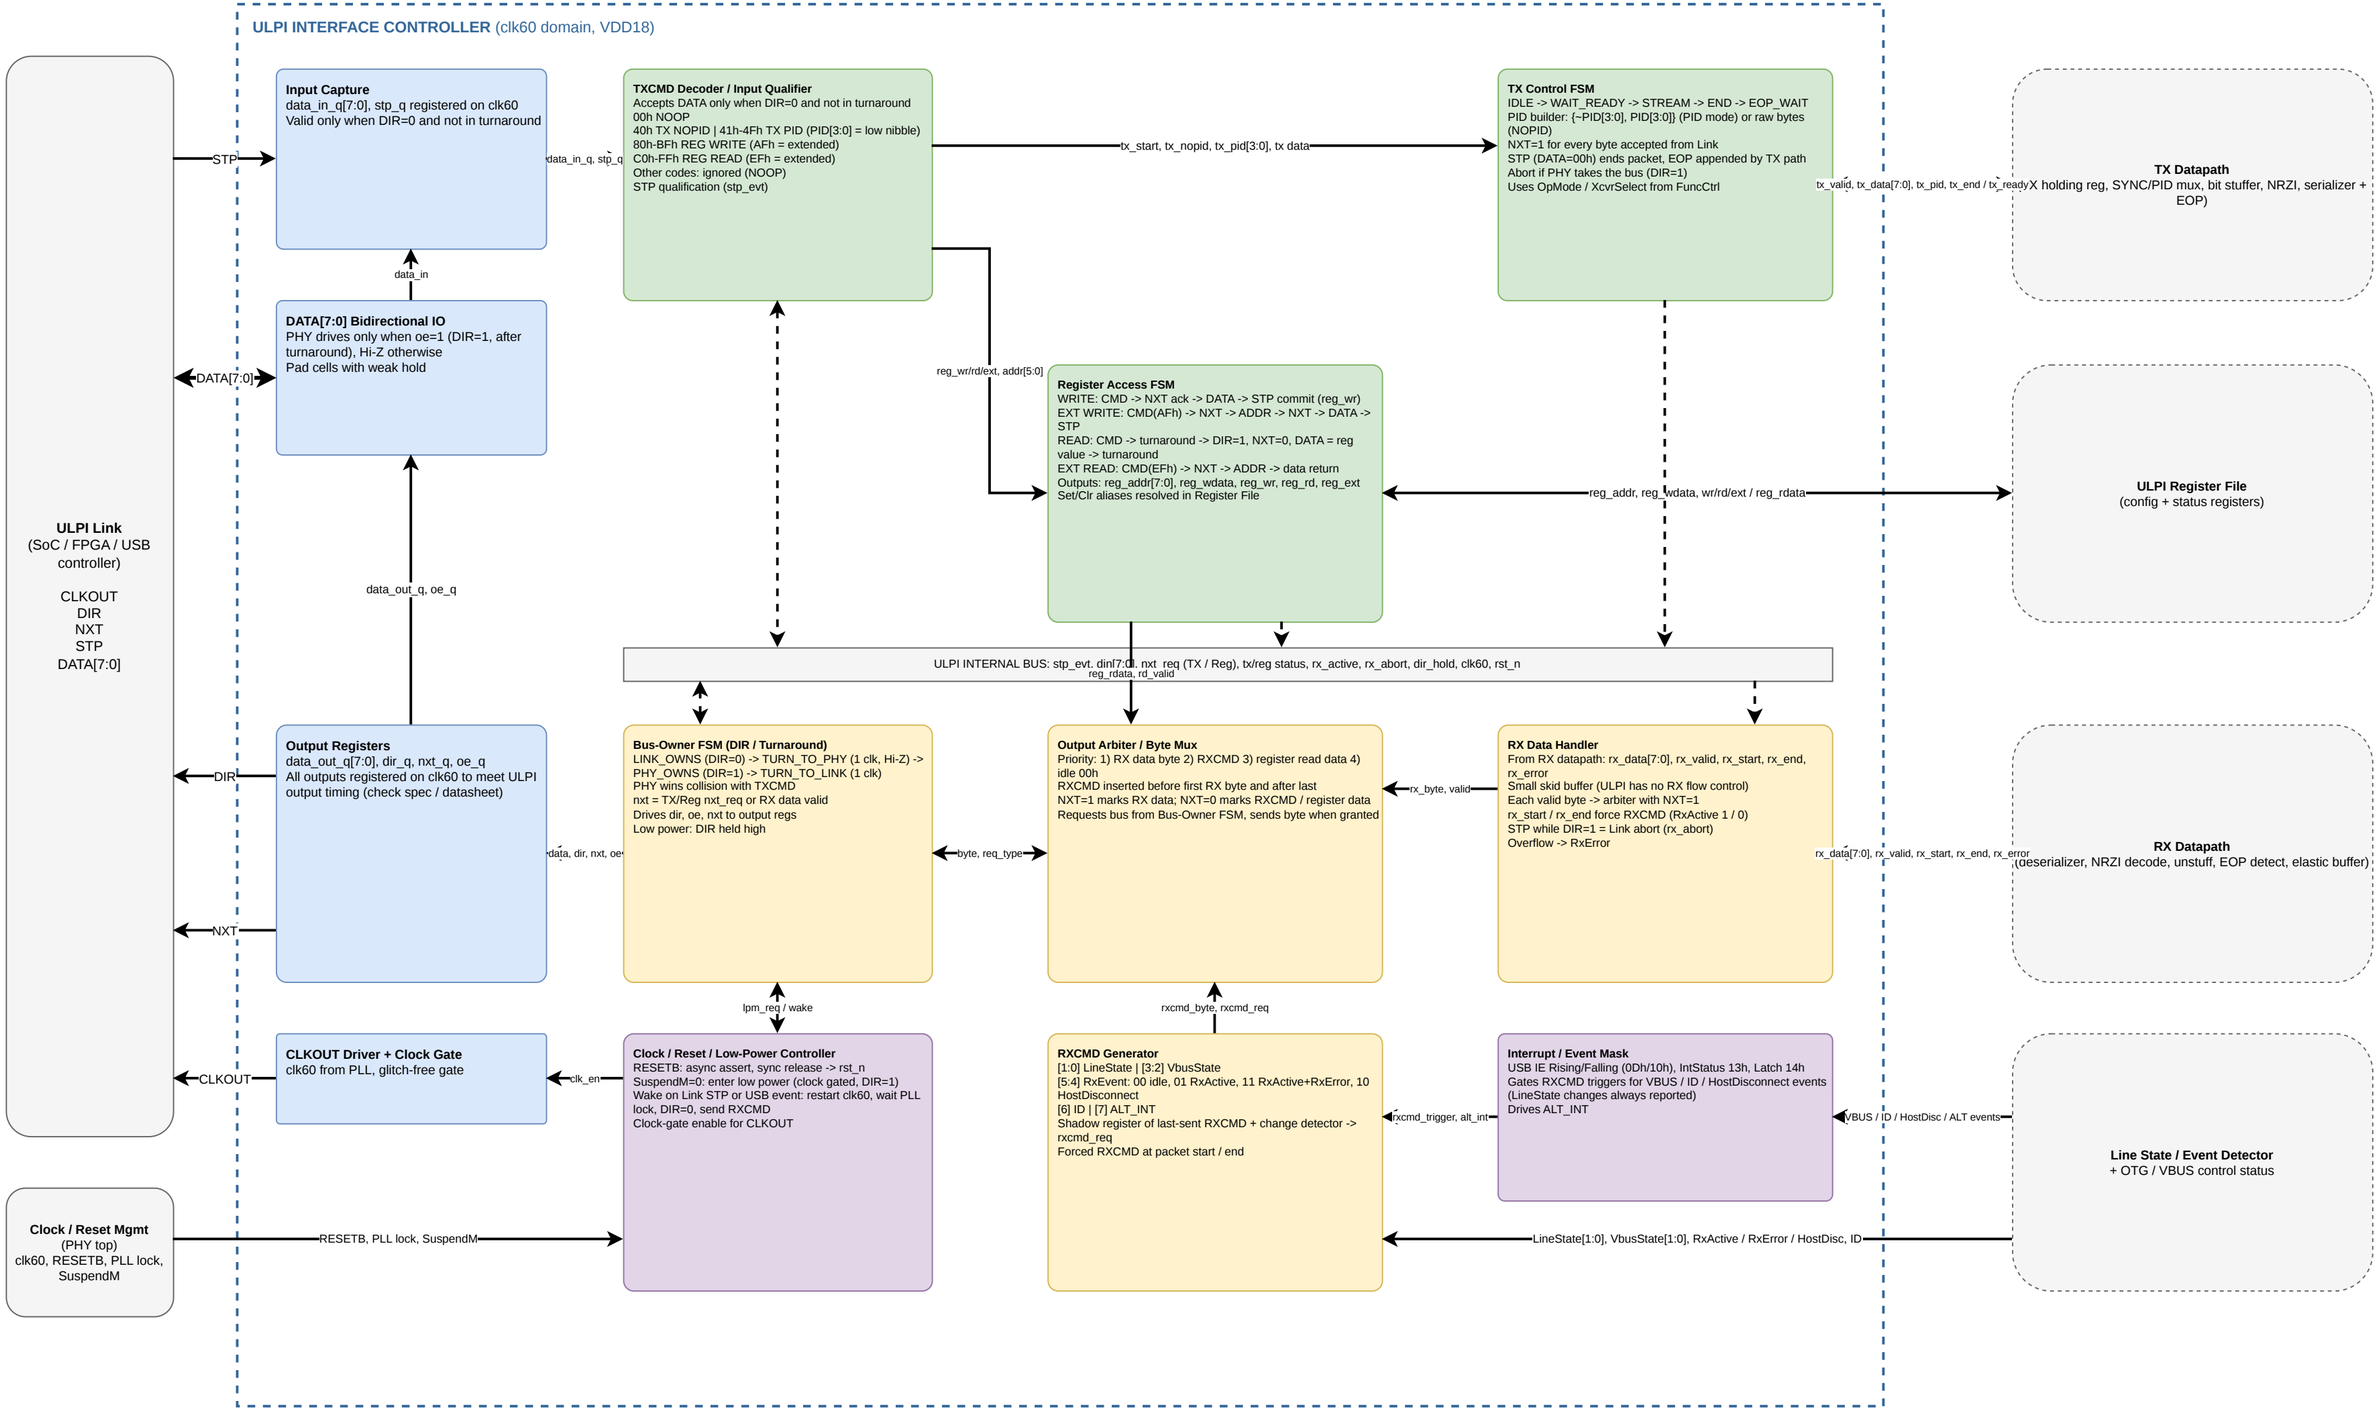

Legend: blue = pad / IO, green = Link-to-PHY path (command, TX, register), yellow = PHY-to-Link path (RX, RXCMD, output), purple = support, grey dashed = blocks outside the ULPI Interface Controller. Config signals (SuspendM, OpMode, XcvrSelect, IE masks) come from the Register File over the config bus (not drawn). Encodings follow ULPI 1.1 - verify against the USB3320 datasheet.