
ULPI Register File - Detailed Block Diagram

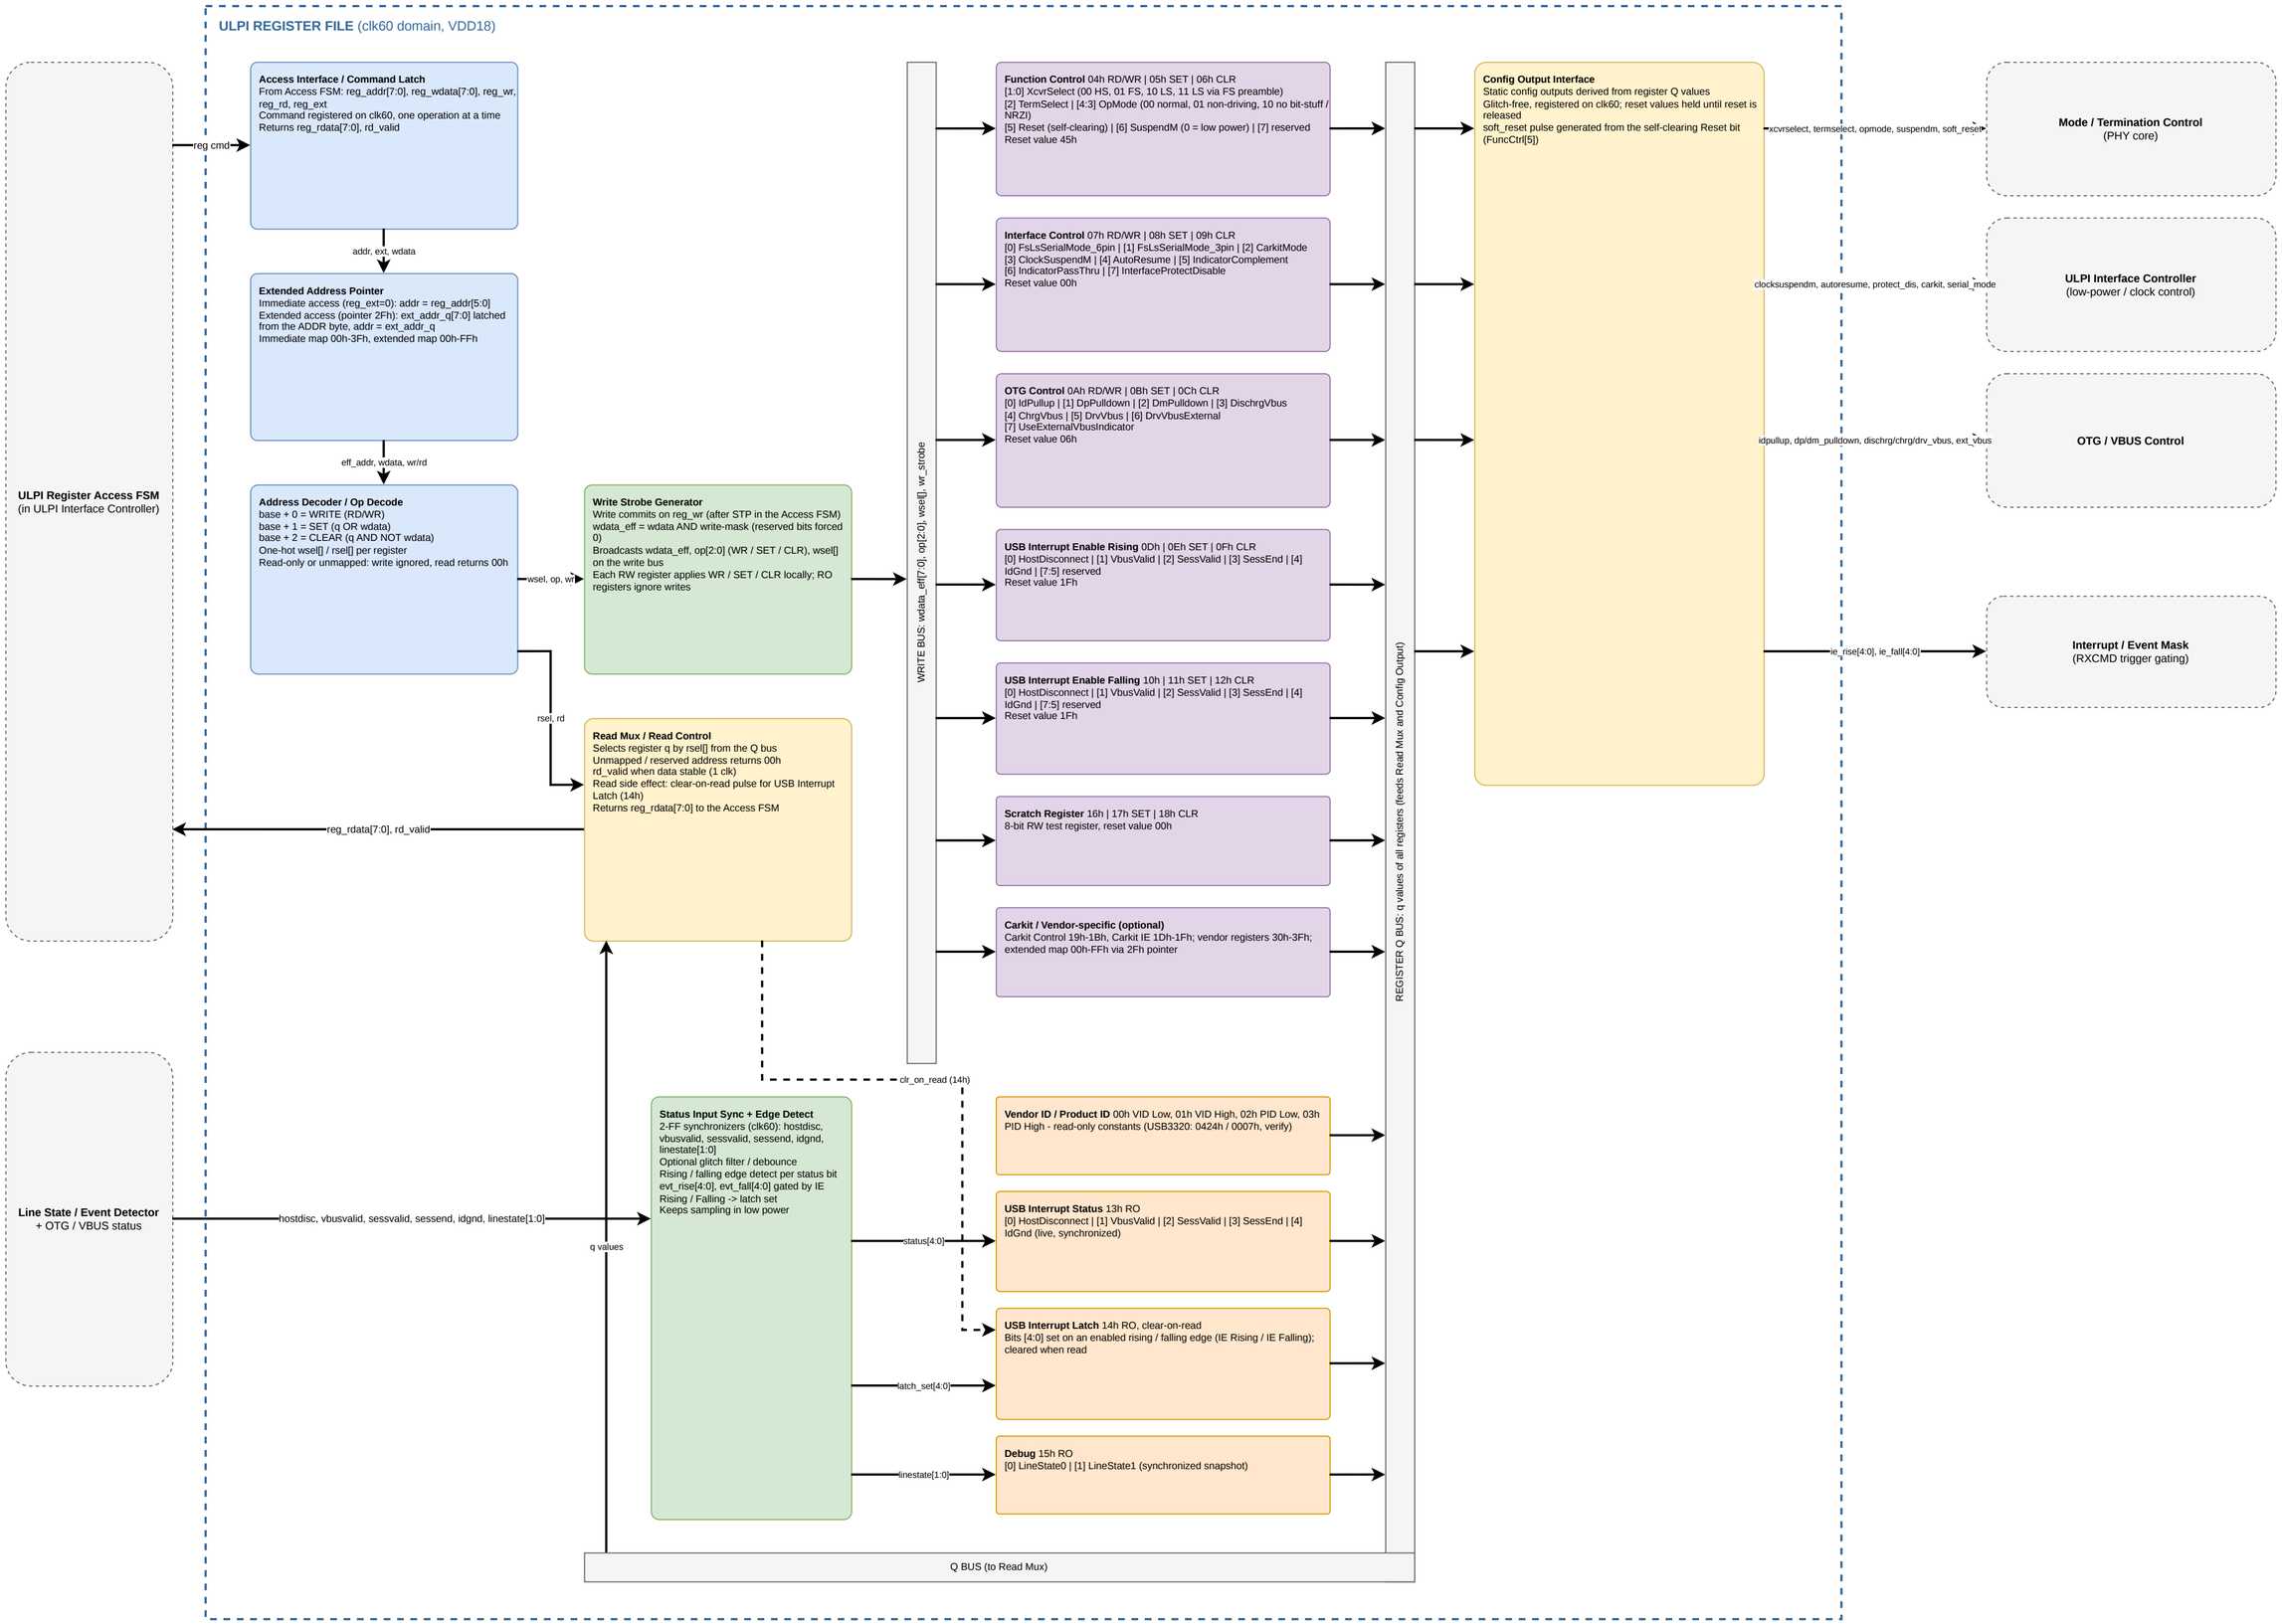

Legend: blue = access path, green = write path / status sync, yellow = read path / outputs, purple = RW registers, orange = RO registers, grey dashed = blocks outside the Register File. Addresses, bit positions and reset values follow ULPI 1.1 (vendor registers and ID values for USB3320 - verify against the datasheet). Global: clk60, rst_n (async assert, sync release); contents retained in low power; writes accepted only while clk60 runs.