10 Seat the lid without trapping wires


ADD THESE PARTS



1 × completed lid

If wired: label each wire, use the terminal maker's strip length and provide external strain relief.

Keep wires away from the lip and blank nuts. Lower the lid until the lip sits inside the case.

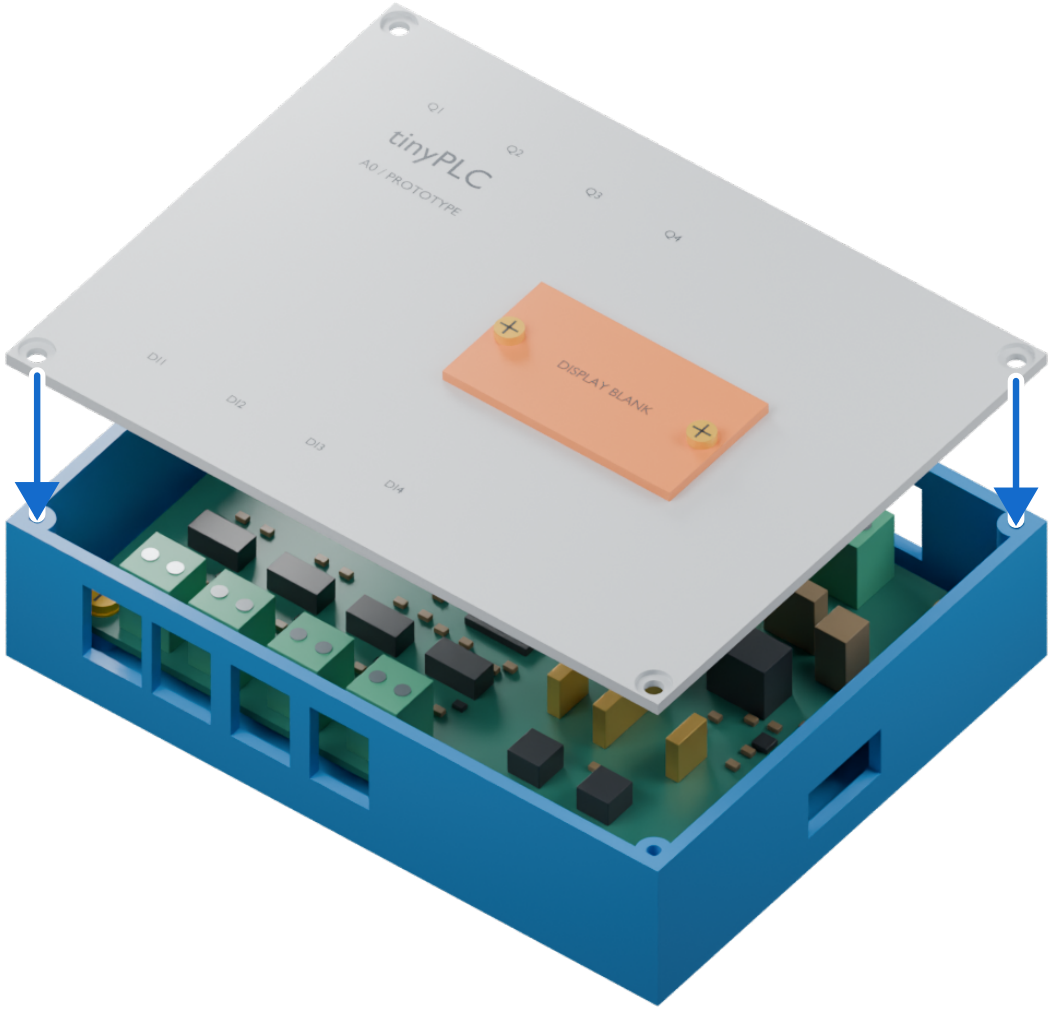

CHECK

Lid sits flush before screws go in.