


/CS: Enable the chip to read/write from/to the B data bus



DIR: 0 to read value from A to B data bus; 1 to write value from B to A data bus

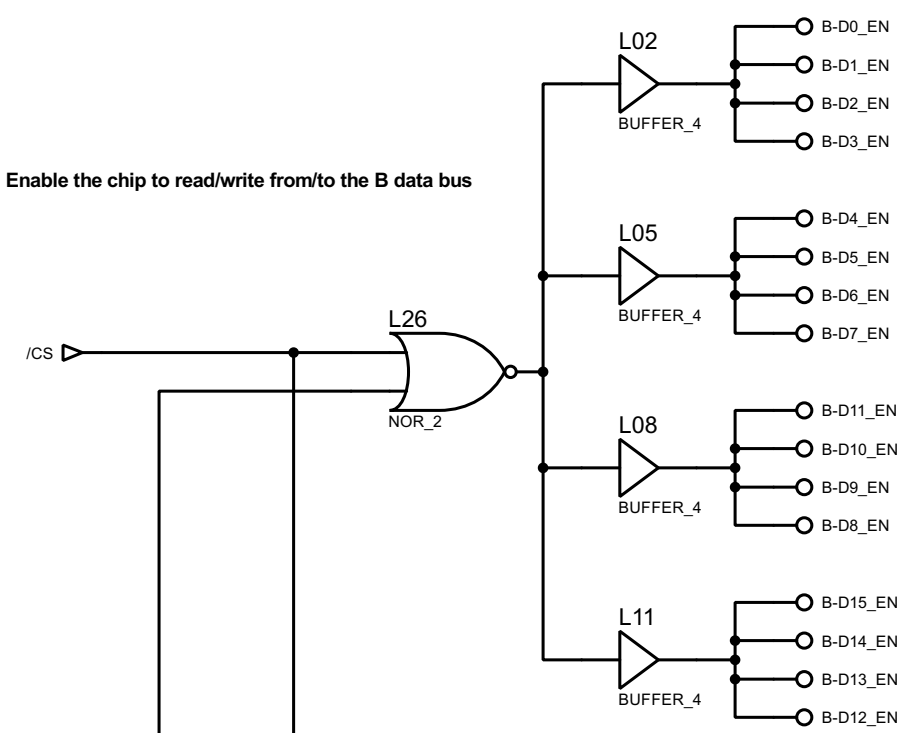