

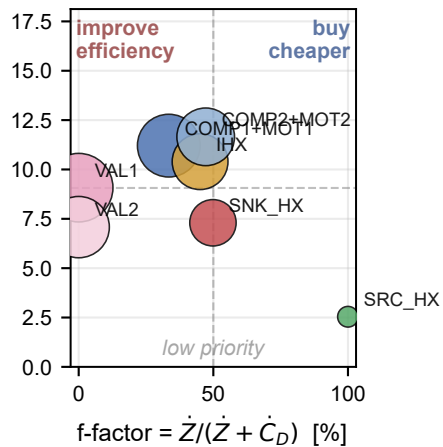
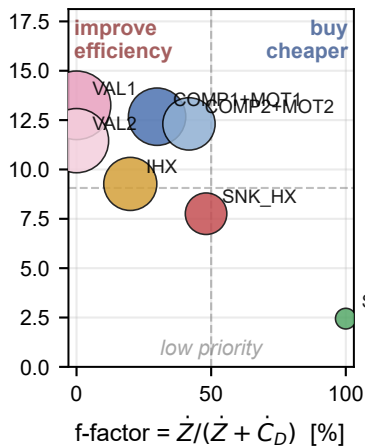
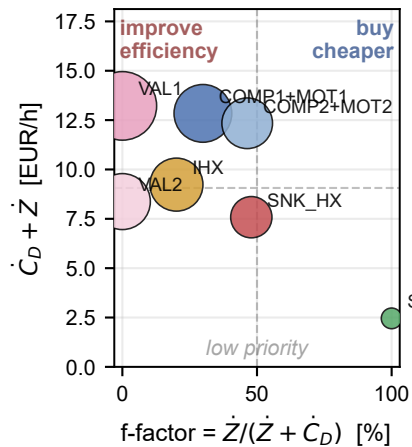
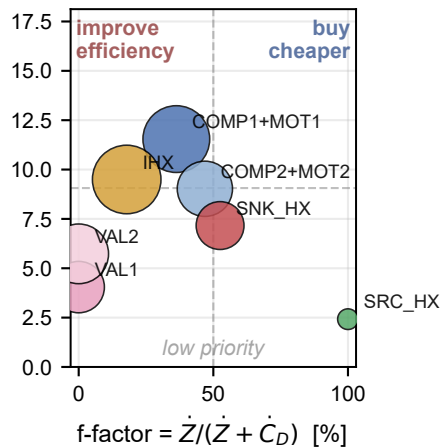


Tsatsaronis quadrant — best design per fluid pair ($T_{\text{steam}} = 100\text{ °C}$)

R1270/R600 LS = 40 % $T_{\text{src}, \text{in}} = 50\text{ °C}$ $C_p = 100.1\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src}, \text{in}} = 50\text{ °C}$ R290/R600a LS = 50 % $T_{\text{src}, \text{in}} = 60\text{ °C}$ $C_p = 96.5\text{ EUR/GJ}_{\text{ex}}$

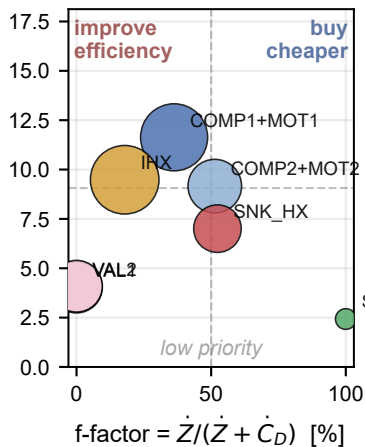

R290/R600a LS = 50 % $T_{\text{src}, \text{in}} = 60\text{ °C}$ $C_p = 88.4\text{ EUR/GJ}_{\text{ex}}$ R1270/R600 LS = 40 % $T_{\text{src}, \text{in}} = 50\text{ °C}$ $C_p = 100.1\text{ EUR/GJ}_{\text{ex}}$ R1270/R600a LS = 50 % $T_{\text{src}, \text{in}} = 60\text{ °C}$ $C_p = 88.4\text{ EUR/GJ}_{\text{ex}}$

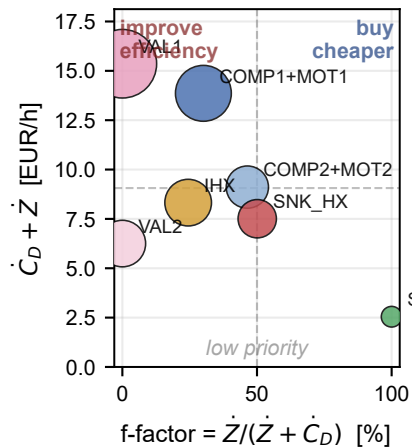

COMP1+MOT1 VAL1 IHX COMP2+MOT2 SNK_HX VAL2 SRC_HX marker size $\propto \dot{C}_D$