

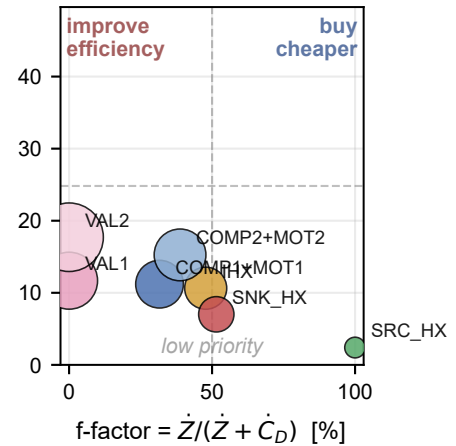
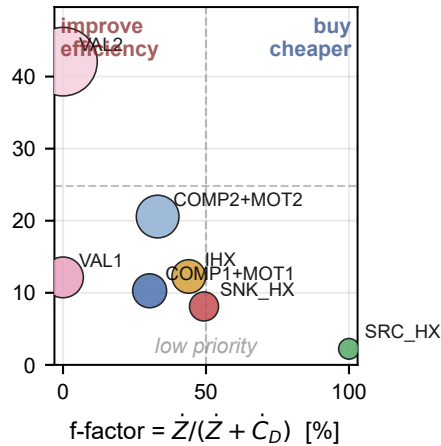
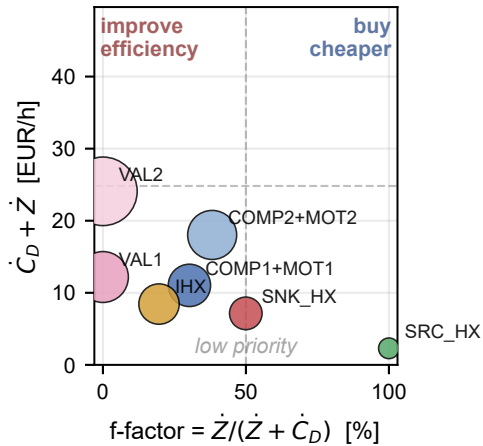
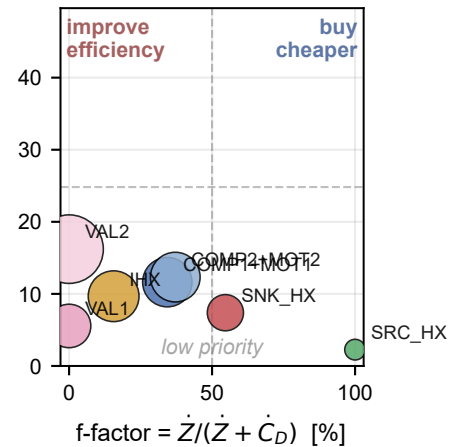


Tsatsaronis quadrant — best design per fluid pair ($T_{\text{steam}} = 120\text{ }^{\circ}\text{C}$)

R1270/R600 LS = 30 % $T_{\text{src},\text{in}} = 50\text{ }^{\circ}\text{C}$ $C_p = 100.5\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src},\text{in}} = 50\text{ }^{\circ}\text{C}$ $C_p = 100.5\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src},\text{in}} = 60\text{ }^{\circ}\text{C}$ $C_p = 100.5\text{ EUR/GJ}_{\text{ex}}$

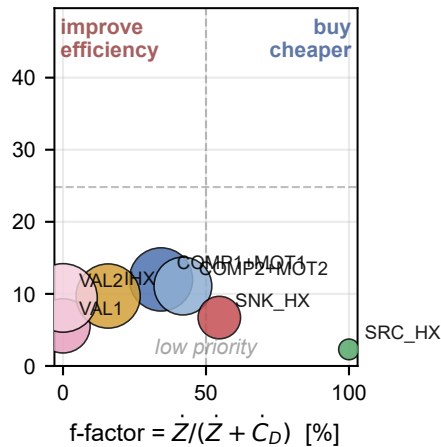

R290/R600a LS = 30 % $T_{\text{src},\text{in}} = 60\text{ }^{\circ}\text{C}$ $C_p = 108.8\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src},\text{in}} = 60\text{ }^{\circ}\text{C}$ $C_p = 108.8\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src},\text{in}} = 60\text{ }^{\circ}\text{C}$ $C_p = 93.5\text{ EUR/GJ}_{\text{ex}}$

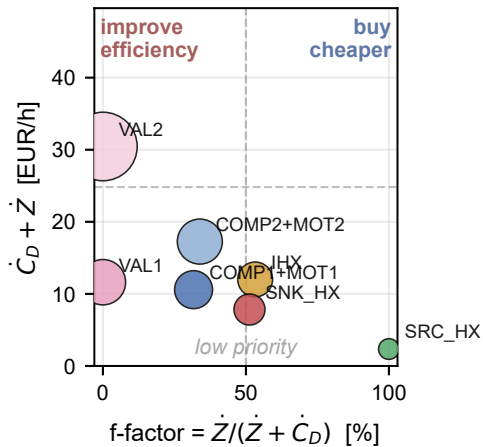

COMP1+MOT1 VAL1 IHX COMP2+MOT2 SNK_HX VAL2 SRC_HX marker size $\propto \dot{C}_D$