

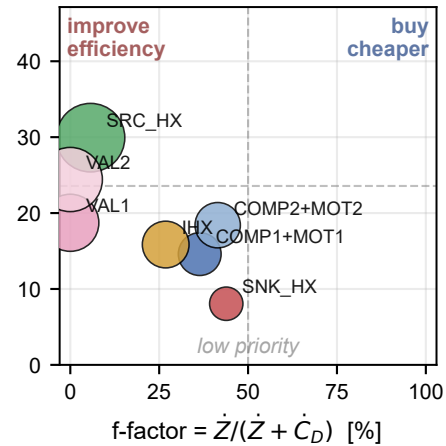
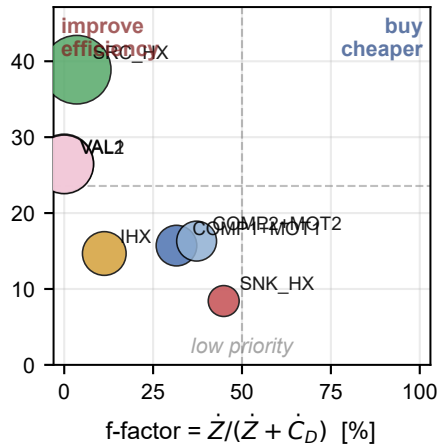
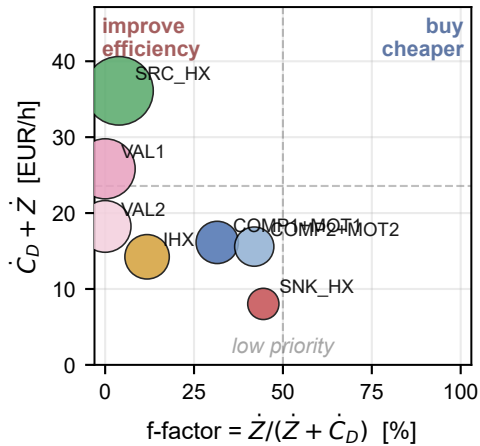
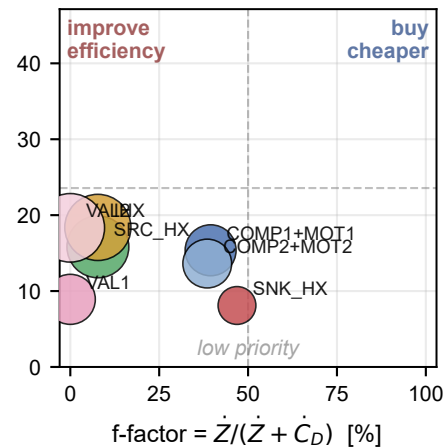


Tsatsaronis quadrant — best design per fluid pair ($T_{\text{steam}} = 110\text{ °C}$)

R1270/R600 LS = 30 % $T_{\text{src}, \text{in}} = 50\text{ °C}$ $c_p = 124.2\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src}, \text{in}} = 50\text{ °C}$ $c_p = 124.2\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src}, \text{in}} = 40\text{ °C}$ $c_p = 124.2\text{ EUR/GJ}_{\text{ex}}$

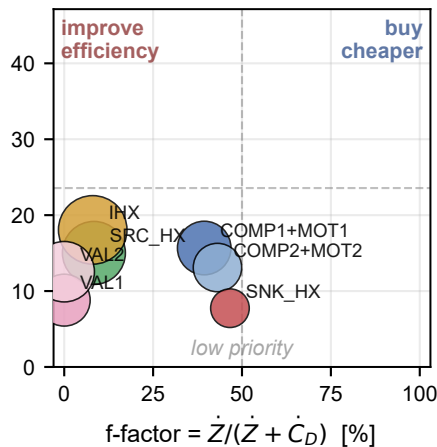

R290/R600a LS = 30 % $T_{\text{src}, \text{in}} = 50\text{ °C}$ $c_p = 116.0\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src}, \text{in}} = 60\text{ °C}$ $c_p = 116.0\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src}, \text{in}} = 60\text{ °C}$ $c_p = 116.0\text{ EUR/GJ}_{\text{ex}}$

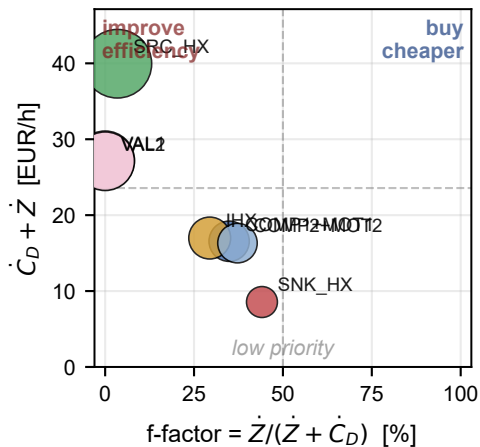

COMP1+MOT1 VAL1 IHX COMP2+MOT2 SNK_HX VAL2 marker size $\propto \dot{C}_D$
SRC_HX