



Best design per $T_{\text{src}, \text{in}}$ ($T_{\text{steam}} = 100\text{ }^{\circ}\text{C}$)


Coefficient of performance

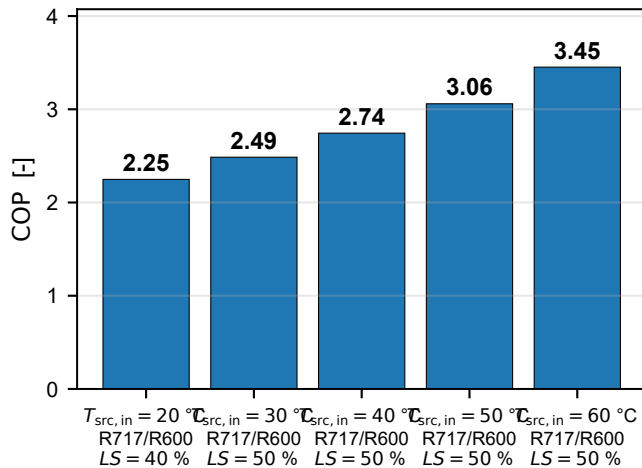

Exergetic efficiency

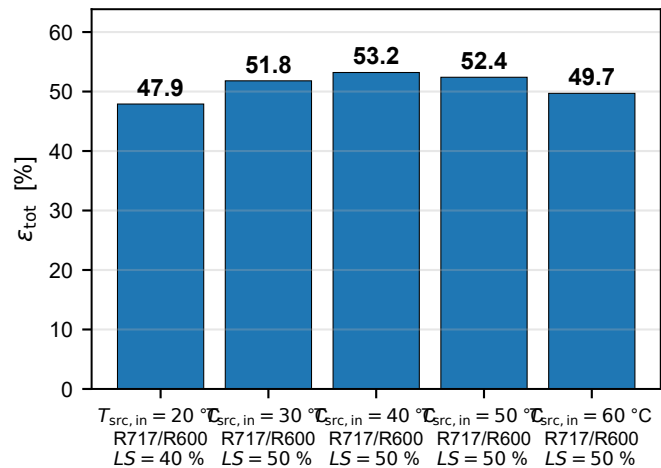

Total capital investment per kW heat

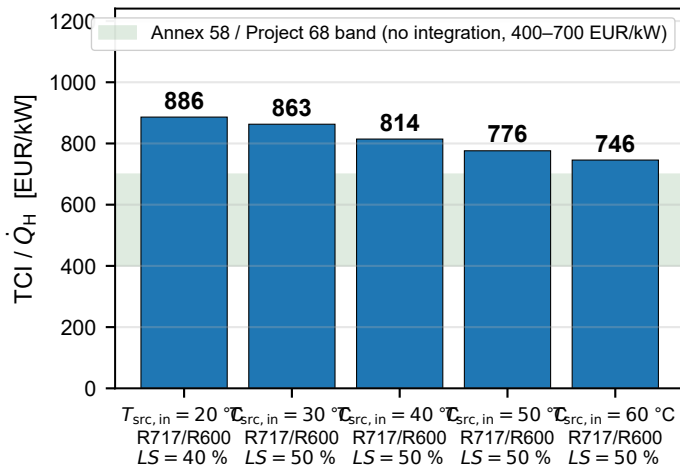

Component cost-rate breakdown

